

EC-34-1

## FORMAL STRUCTURAL REPORT

### Twisted Steel Mechanical Inc.

294 Pacific Crescent  
Fort McMurray, AB T9K 0G5

Attention: Ash Riggs

Owner: Twisted Steel Mechanical Inc.

### Structural Inspection of Maxilift Truck Mount Crane

MODEL: 5500 RS E, SERIAL: 30519, UNIT: 13

ODOMETER: 174,736 km, VIN #: 3C7WRNBL9J6242869

LOCATION: Kova - 925 Memorial Dr, Fort McMurray

DATE OF INSPECTION: October 16, 2024

OUR FILE: F22576

Visual examinations and magnetic particle inspections were performed on the above-described equipment. The specific items examined and our inspection findings were as follows:

1. Stabilizers (2x) - no defects noted.
2. Subframe - no defects noted.
3. Turret - no defects noted.
4. Winch Mount - no defects noted.
5. Boom Butt Section - no defects noted.
6. Boom Intermediate Extension - no defects noted.
7. Hydraulic Boom Tip Extension - no defects noted.
8. Load Line (Spooled) (Visual) - no defects noted.
9. 3 Ton S.W.L. Next Hydraulics Load Block & 3.2 Ton S.W.L. Swivel Hook - no defects noted.


Please Note: The design of the crane mount structure is the responsibility of the installer. Kova Engineering Ltd. assumes no liability with regards to the crane mount.

Based on our examination findings, the inspected equipment is recommended for service.

Yours very truly,

KOVA ENGINEERING LTD.

the Crane Certification Bureau™

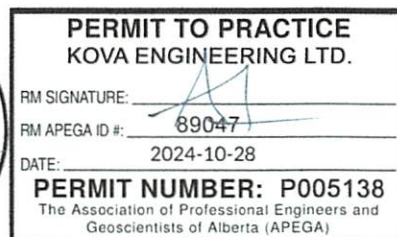

Matt Hanes, P. Eng.

MH:sw