



CARIBOU ELECTRIC

Caribou Electric Motor Shop

4003 76 avenue
Edmonton Alberta
T6B2S8
lance@caribouelectric.com
www.caribouelectric.com
7804631305

Estimate

Estimate No: 39990
Date: 2024-04-03

For: Midnight Oil Mechanical Service
cpaul@midnightoilmechanical.com
Box 875, Sexsmith, AB T0H 3C0
780-882-0259

Ship To: Box 875, Sexsmith, AB T0H 3C0

Tracking No
Ship Via
FOB

Component	Generator	RPM & Frequency	1800RPM / 60HZ	Amperage	330.8A
Serial Number	M14C101414	KW/HP	220KW	Purchase Order	Estimate Only
Make & Model	STAMFORD / UCDI274J1	Voltage & Phase	480V / 3PHS	Representative	Wayne King

Description	Quantity	Rate	gst	Amount
Bearing Kit, NDE	1	\$120.00	5%	\$120.00
Amp Meter	1	\$135.00	5%	\$135.00
Voltage Meter	1	\$135.00	5%	\$135.00
Frequency Meter	1	\$275.00	5%	\$275.00
Current Transformer, 300:5A	3	\$120.00	5%	\$360.00
End Bracket, NDE	1	\$325.00	5%	\$325.00
Automatic Voltage Regulator, MX341	1	\$500.00	5%	\$500.00
Glyptal	1	\$130.00	5%	\$130.00
Shop Supplies and Paint	1	\$240.20	5%	\$240.20
			Parts Subtotal	\$2,220.20

Description	Quantity	Rate	gst	Amount
Rebuild Generator	1	\$3,640.00	5%	\$3,640.00
- Disassemble, Inspect & Test				
- Power Wash & Oven Dry Components				
- Dynamic Balance Rotor				
- Glyptal Windings				
- Reassemble & Test				
- Prep, Paint, Package for Shipping				
Additional Labor	1	\$390.00	5%	\$390.00
- rebuild meter panel				
- re-sleeve main leads				
			Labour Subtotal	\$4,030.00
			Subtotal	\$6,250.20
			gst 5%	\$312.51
			Shipping	\$0.00
			Total	\$6,562.71
			Total	\$6,562.71

Notes

Thank You For Your Business

Terms and Conditions

- Purchase order required prior to work commencing
- A minimum inspection fee of \$480.00 will apply to all jobs
- Inspection charges will be invoiced 30 days after estimate submittal
- Storage fee will apply to all equipment held at Caribou Electric past 30 days
- Equipment held in storage past 90 days without approval/agreement will be deemed as scrap
- All Caribou Electric Standard Terms and Conditions apply

Caribou Electric Motor Shop

Client's signature


Datatag



Incoming




Main Stator

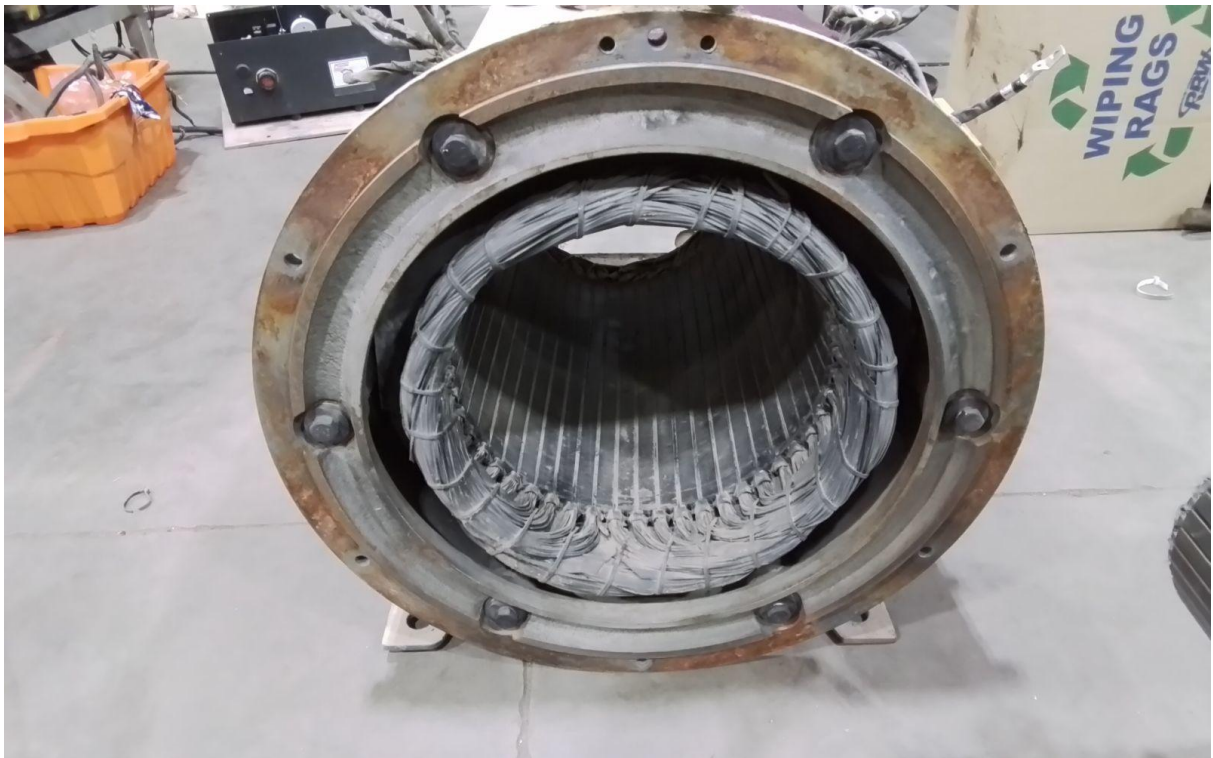

Exciter Rotor



Current Transformers

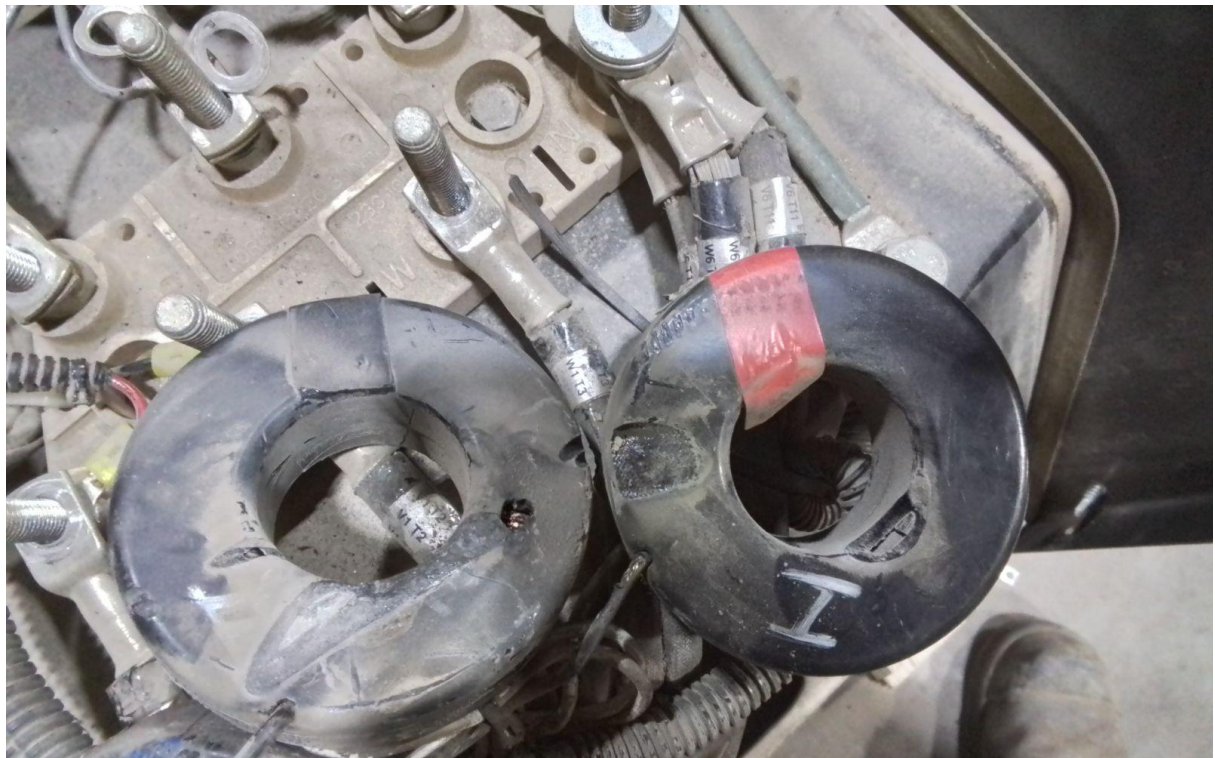

Meter Panel

