

## EC CERTIFICATE OF CONFORMITY

Side 1 – Complete Vehicles

The undersigned: **AYHAN ÜNSAL**, Technical manager hereby certifies that the vehicle;


- 0.1. Make (Trade name of manufacturer) : **AYHAN ÜNSAL**
- 0.2. Type : **3AYH**  
Variant <sup>(a)</sup> : **1R29A**  
Version <sup>(a)</sup> : **F0W1L1B**
- 0.2.1. Commercial name (s) : **3AYH29**
- 0.4. Vehicle Category : **O4**
- 0.5. Company name and address of the manufacturer : **AYHAN ÜNSAL TREYLER NAKLİYE  
SANAYİ VE TİCARET LİMİTED. ŞİRKETİ.  
HOROZLUHAN MAH. HASTÜRK SK.  
ÖRNEK SANAYİ SİTESİ NO:7  
SELÇUKLU/KONYA/ TURKEY**
- 0.6. Location and method of attachment of the statutory plates : **Statutory plate is clinched to front right hand  
side of the chassis.**  
Location of the vehicle identification number : **VIN is stamped to front right hand side of  
the chassis.**
- 0.9. Name and address of manufacturer's representative (if any) : **İLKER EMRE ÜNAL  
Höstvädersgatan 418 33  
Göteborg/Sweden**
- 0.10. Vehicle Identification Number : **NR93AYH00TK088008**
- 0.11. Date of manufacture of the vehicle : **11.04.2026**

*conforms in all respect to the type described in approval (e24\*2018/858\*00501\*00) issued on (19.02.2025) and can be permanently registered in Member States having right/left<sup>(b)</sup> hand traffic and using metric/imperial<sup>(c)</sup> units for the speedometer and metric/imperial units for the odometer (if applicable)<sup>(d)</sup>*

Place: KONYA / TÜRKİYE  
Date: 11.04.2026

Signature:

**AYHAN ÜNSAL TREYLER**  
NAKLIYE SAN. VE TİC. LTD. ŞTİ.  
Horozluhan Mah. Hastürk Sk. No: 7  
Selçuklu / Konya  
Selçuk Vergi Dairesi 121 045 3900

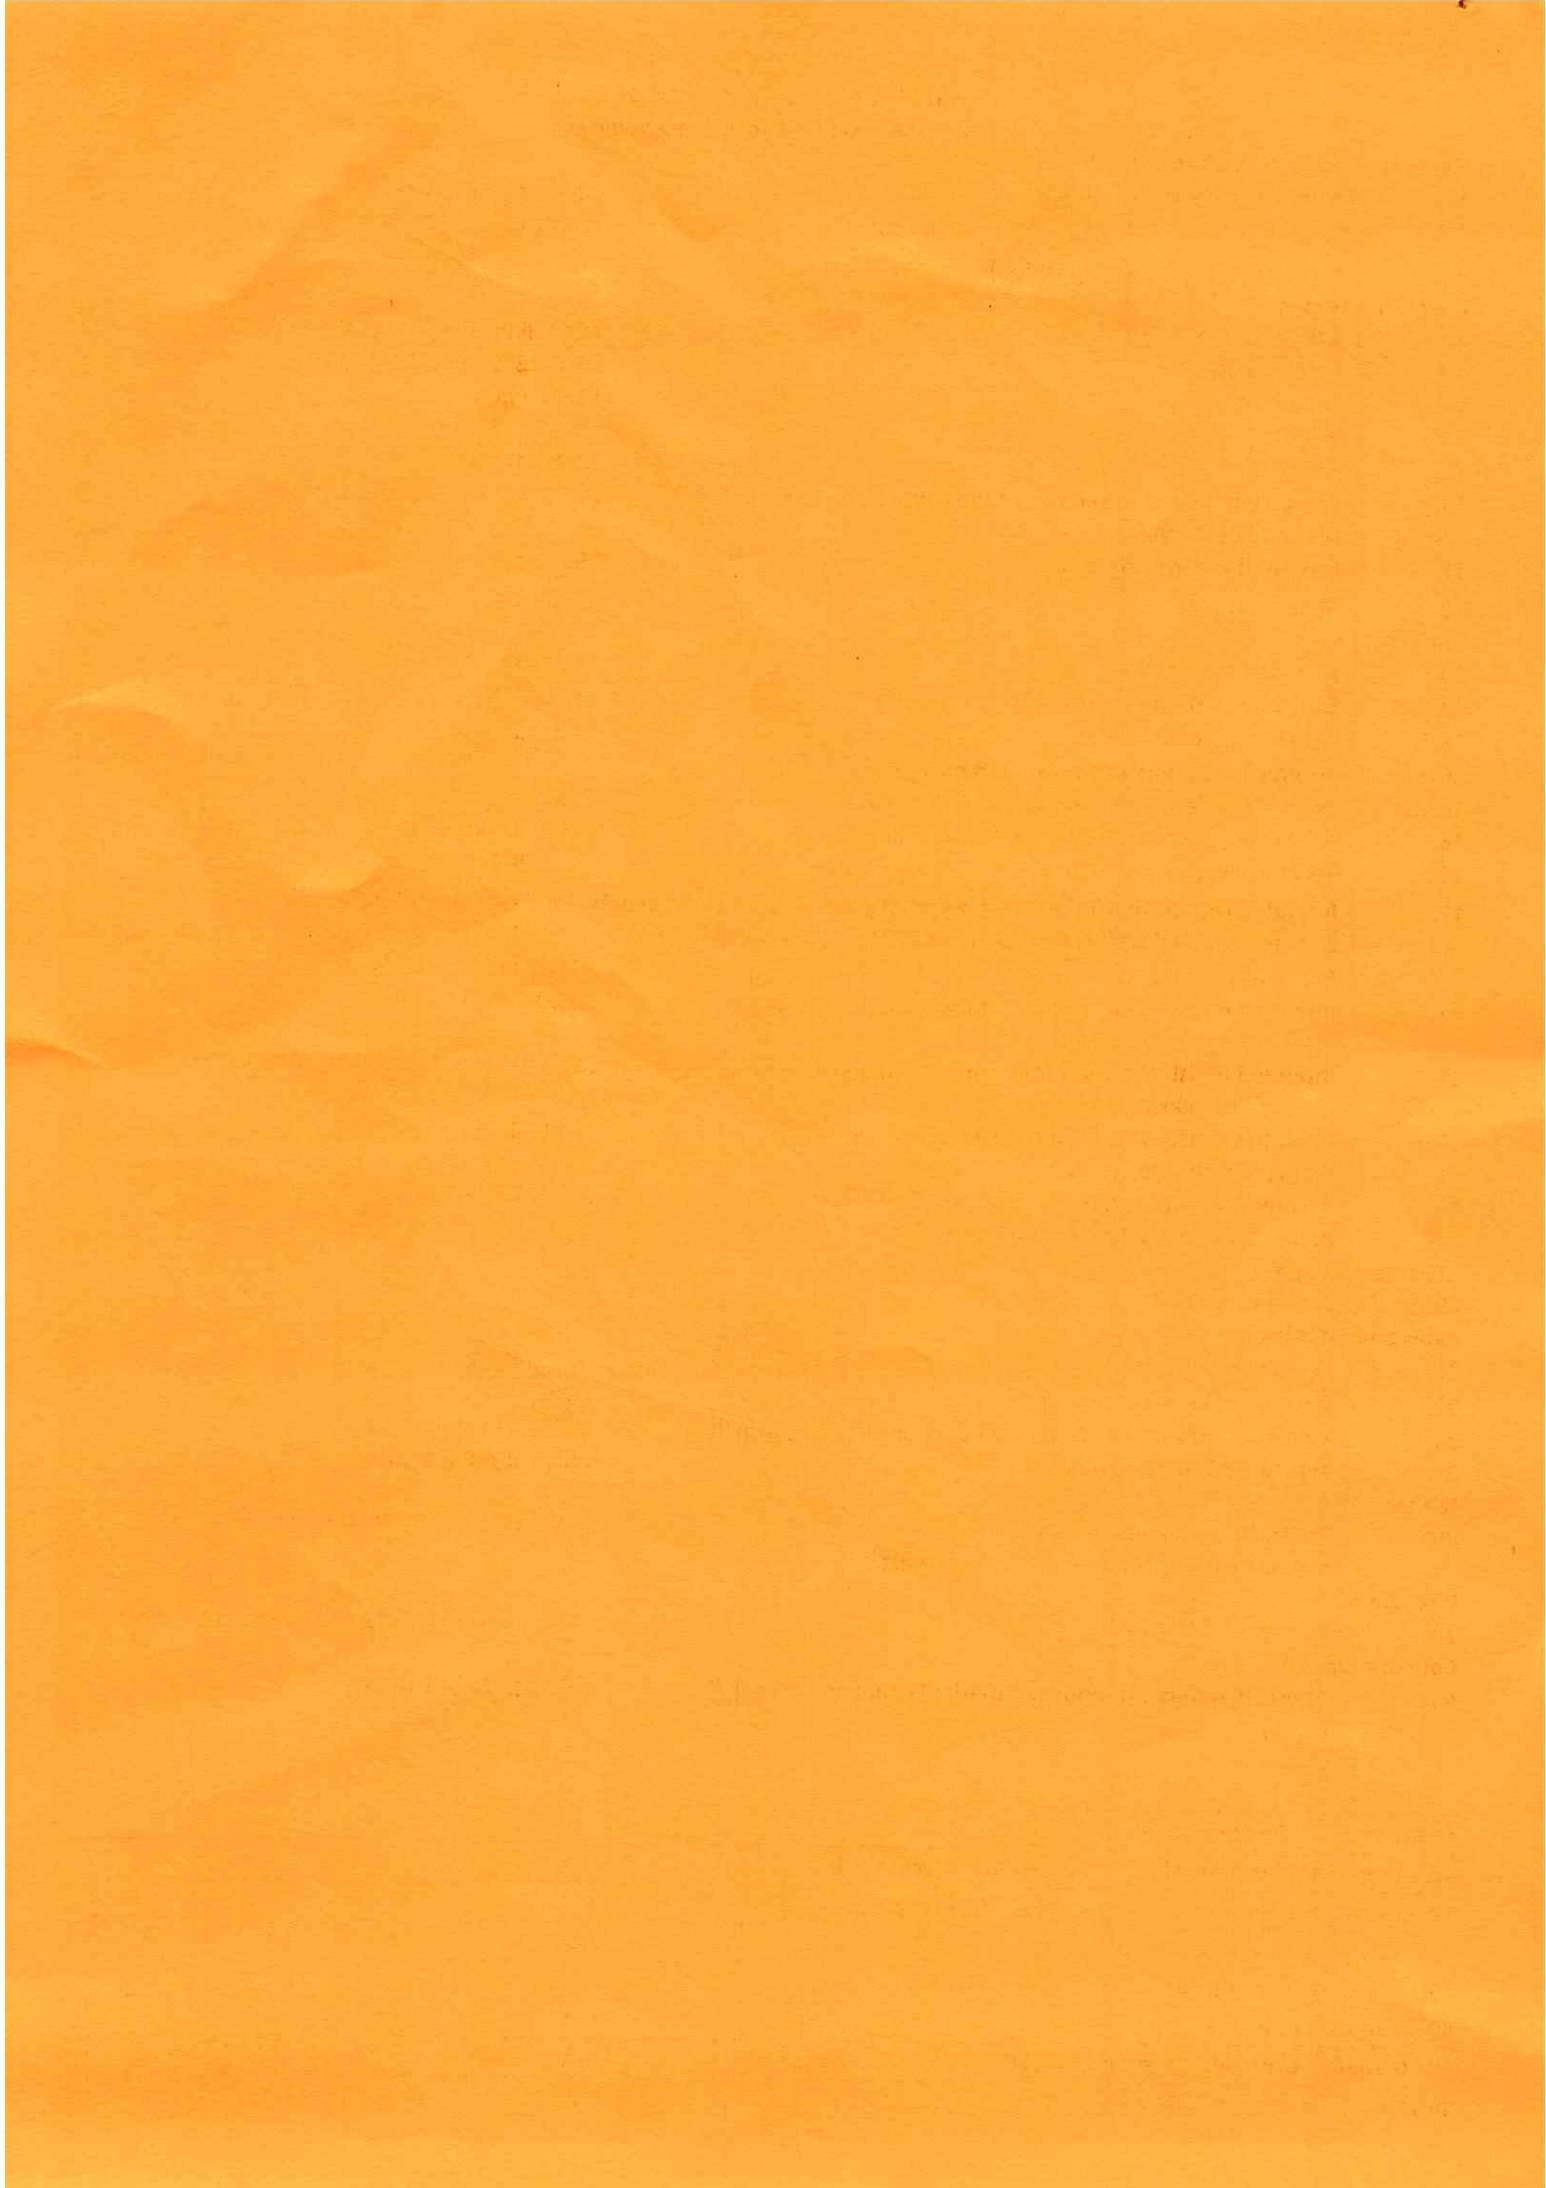

## VEHICLE CATEGORIES O3 and O4

### Side 2 – Complete ~~and Completed~~ Vehicles

#### General Construction Characteristics

- |      |   |                         |
|------|---|-------------------------|
| 1.   | Number of axles and wheels                    | : 3 axles and 12 wheels |
| 1.1. | Number and position of axles with twin wheels | : All axles             |
| 2.   | Steered axles (number, position)              | : N.A.                  |

#### Main Dimensions

- |      |  |  |
|------|--|--|
| 4.   | Wheelbase <sup>(e)</sup>   | : Coupling point to 1st axle : 6500 mm |
| 4.1. | Axle spacing   | : 1-2: 1350 mm, 2-3: 1350 mm           |
| 5.   | Length   | : 13500 mm                             |
| 6.   | Width  | : 2550 mm                              |
| 7.   | Height   | : 3000 mm                              |
| 10.  | Distance between the centre of the coupling device and the rear end of the vehicle | : 11200 mm                             |
| 11.  | Length of the loading area   | : 9000 mm                              |
| 12.  | Rear overhang  | : 2000 mm                              |

#### Masses

- |       |   |   |
|-------|---|---|
| 13.   | Mass in running order   | : 9000 kg                               |
| 13.1  | Distribution of this mass amongst the axles   | : 1. 2250 kg; 2. 2250 kg; 3. 2250 kg    |
| 13.2. | Actual mass of the vehicle  | : 9000 kg                               |
| 16.   | Technically permissible maximum masses  |   |
| 16.1. | Technically permissible maximum laden mass  | 60000 kg                                |
| 16.2. | Technically permissible mass on each axle   | : 1. 12000 kg; 2. 12000 kg; 3. 12000 kg |
| 16.3. | Technically permissible mass on each axle group   | : 1. 36000 kg                           |
| 17.   | Intended registration/in service maximum permissible masses in national/ <del>international</del> traffic <sup>(1) (e)</sup><br>Only for national traffic, the lower-case letter 'e' followed by the distinguishing number of the Member state: e24<br>For international traffic, number of the Directive/Regulation: 96/53/EC amended by EU 2019/984 |   |
| 17.1. | Intended registration/in service maximum permissible laden mass   | : 60.000 kg                             |
| 17.2. | Intended registration/in service maximum permissible laden mass on each axle  | : 1-12000 kg; 2-12000 kg; 3-12000 kg    |
| 17.3. | Intended registration/in service maximum permissible laden mass on each axle group  | : 36.000 kg                             |
| 19.   | Technically permissible maximum static mass on the coupling point of a semi-trailer or centre-axle trailer  | : 24000 kg                              |

#### Maximum Speed

- |     |               |           |
|-----|---------------|-----------|
| 29. | Maximum speed | : 80 km/h |
|-----|---------------|-----------|

#### Axles and Suspension

- |     |   |                        |
|-----|---|------------------------|
| 31. | Position of lift axle(s)  | : 1 <sup>st</sup> axle |
| 32. | Position of loadable axle(s)  | : N.A.                 |
| 34. | Axle(s) fitted with air suspension or equivalent: yes/no <sup>(1)</sup> | : Yes, Air suspension  |
| 35. | Tyre/wheel combination <sup>(h)</sup>                                   | : All, 245/70 R 17,5   |

#### Brakes

- |     |   |                           |
|-----|---|---------------------------|
| 36. | Trailer brake connections<br>mechanical/electric/pneumatic/ <del>hydraulic</del> <sup>(1)</sup> | : WABCO T EBS-E Pneumatic |
|-----|---|---------------------------|

#### Bodywork


- |     |                                  |  |
|-----|----------------------------------|--|
| 38. | Code for bodywork <sup>(i)</sup> | : DA: Semi-trailer ; 29 low floor semi-trailer |
|-----|----------------------------------|--|

#### Coupling Device

- |       |   |  |
|-------|---|--|
| 44.   | Approval number or approval mark of coupling device (if fitted) | : E11 55R 011 0706                     |
| 45.1. | Characteristics values <sup>(1)</sup>                           | : D: 175 kN / V: ... / S: ... / U: ... |

#### Environmental Performance

- |   |      |
|---|------|
| 49.1 Cryptographic hash of the manufacturer's records file(177) | N.A. |
| 49.4 Cryptographic hash of the customer information file(178)   | N.A. |
| 49.6 Weighted payload value...t(179)                            | N.A. |
| 49.7 Vehicle group...(182)                                      | N.A. |
| 49.9 Cargovolume...m3(181)                                      | N.A. |
| 49.10 Volume orientation: yes/no(4) (176)                       | N.A. |
| 49.11 Efficiency ratios(180)                                    | N.A. |

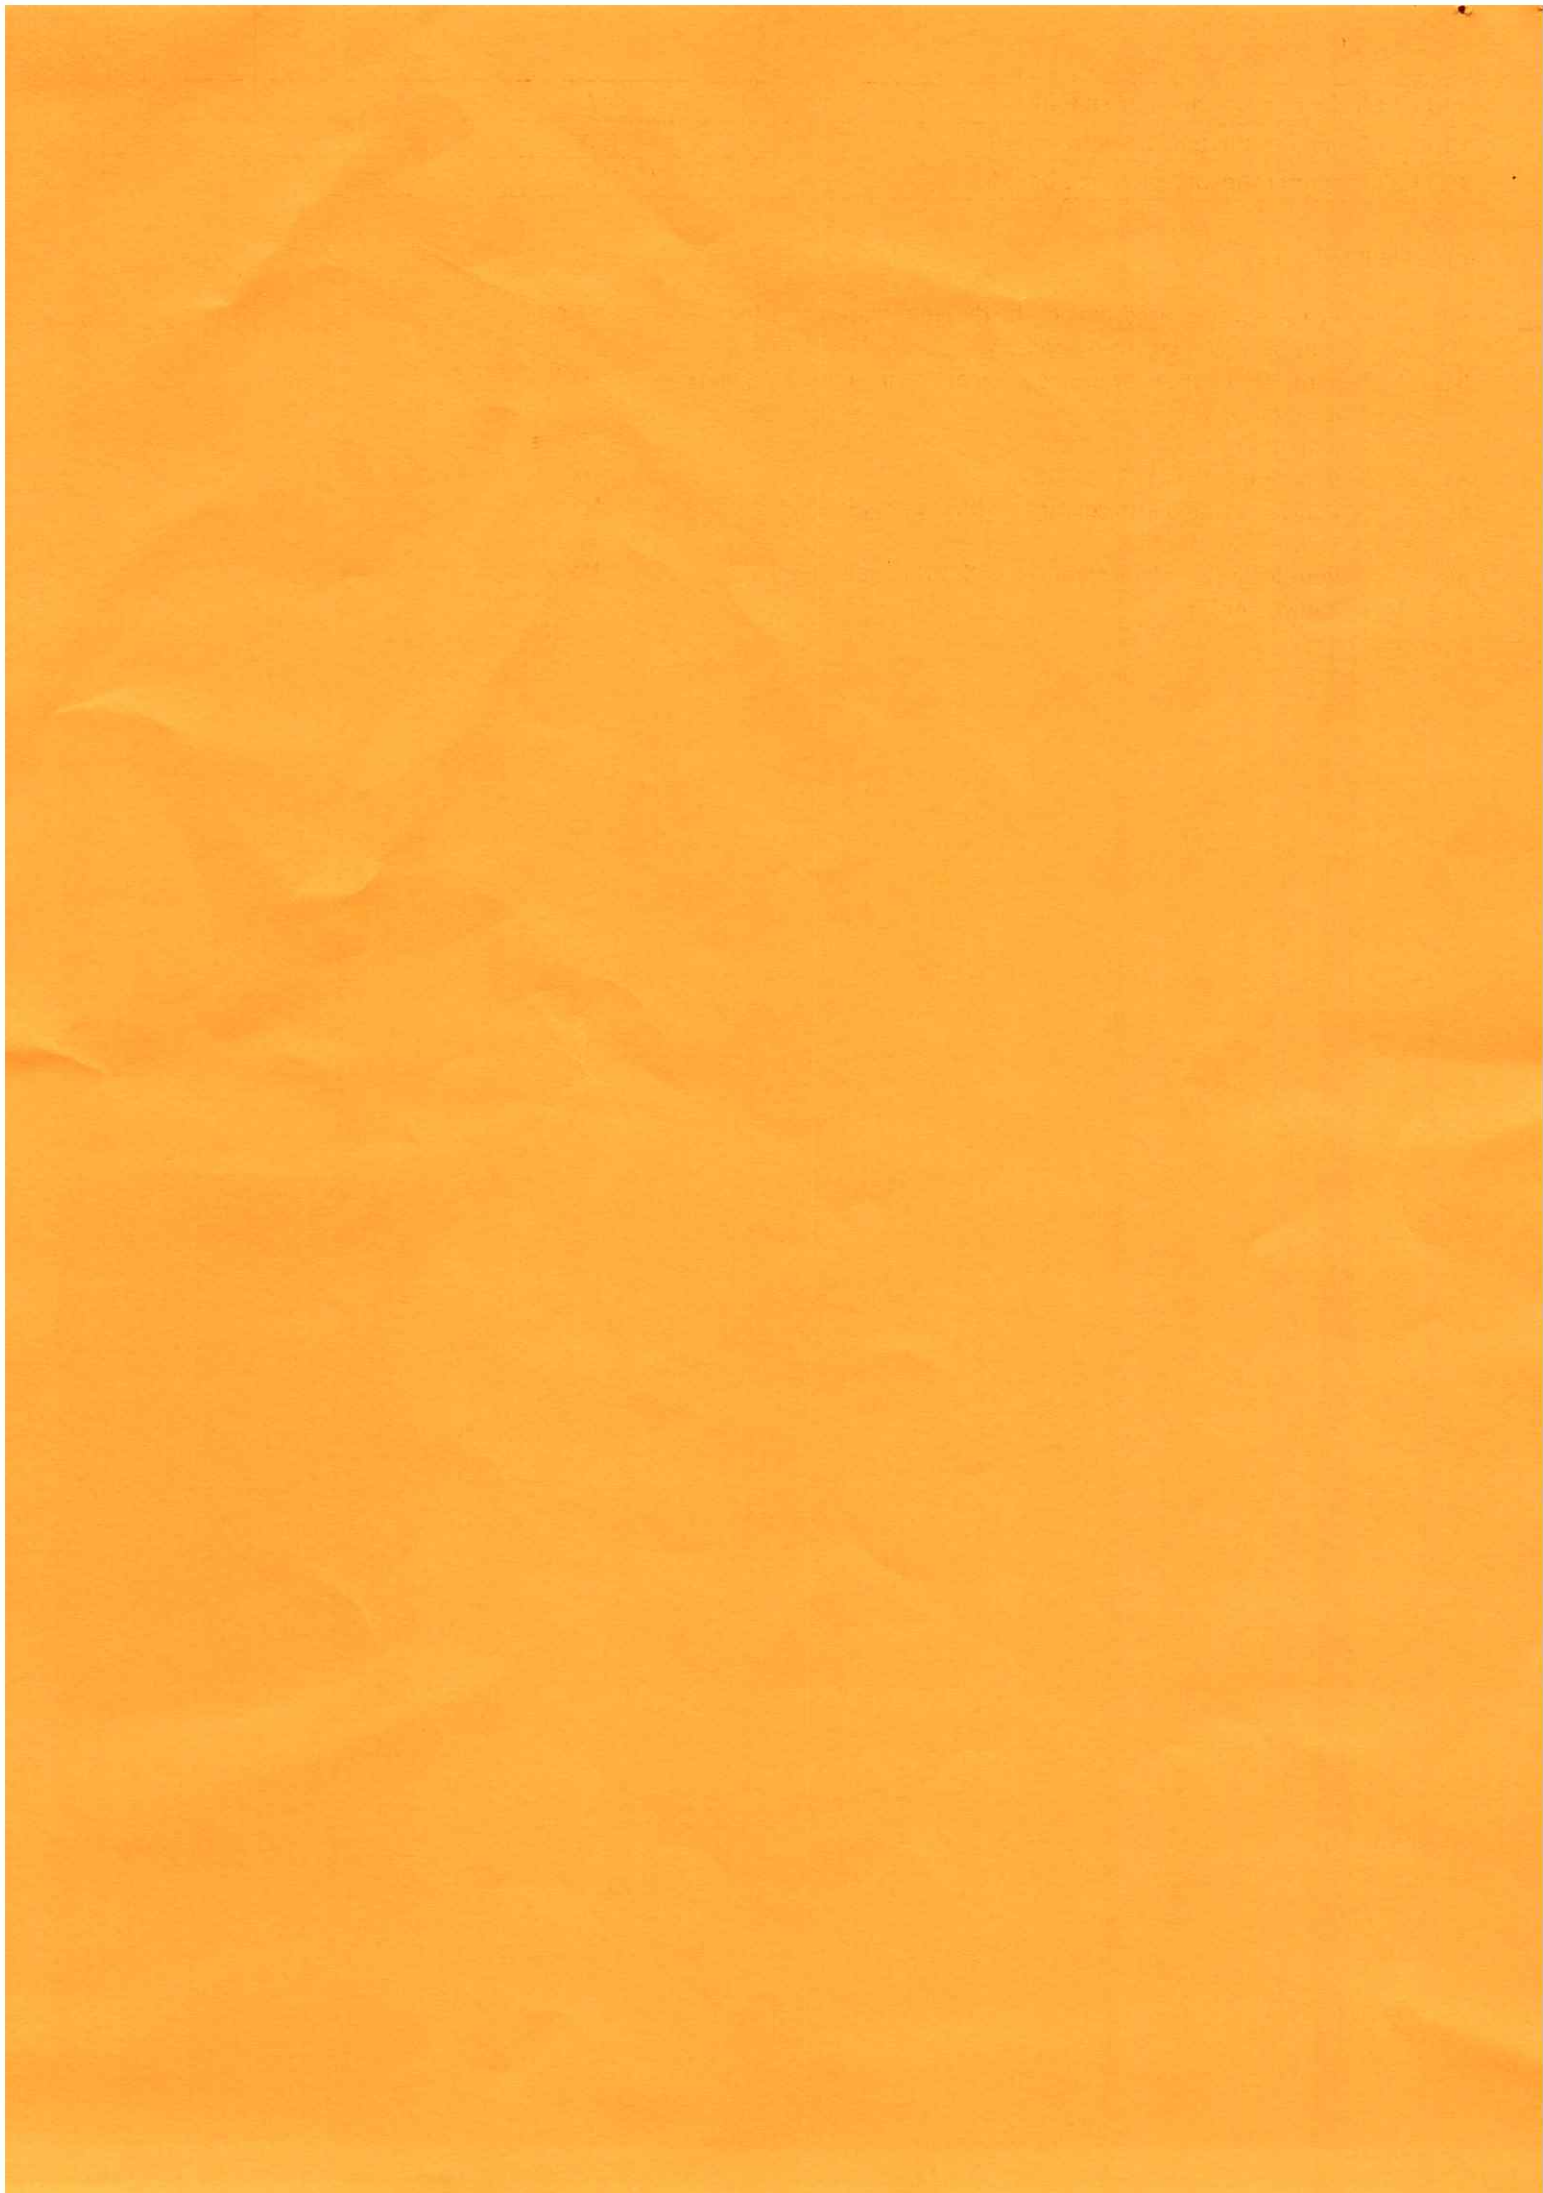

49.11.1 Efficiency ratio—kilometre based	N.A.
49.11.2 Efficiency ratio—ton-kilometre based	N.A.
49.11.3 Efficiency ratio—m3-kilometre based	N.A.

#### Miscellaneous

50.	Type-approved according to the design requirements for transporting dangerous goods: <del>yes/class(es); ....</del> / no <sup>(l)</sup>	: No
51.	For special purpose vehicles: designation in accordance with Annex II Section 5	: N.A.
52.	Remarks <sup>(n)</sup>	: None
54	Vehicle fitted with:TPMS (181)	Yes
55	Vehicle certified in accordance with UN Regulation No 155:yes/no(4)	No
56	Vehicle certified in accordance with UN Regulation No 156:yes/no(4)	No

