


The reproduction, distribution and utilization of this document as well as the communication of its contents to others without explicit authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

Represented device can contain special equipment. Obligatory scope of supply is to be inferred from the order confirmation.

If You agree with the specified weights and measurements, please sign here:

PM-Dealer:

Customer:

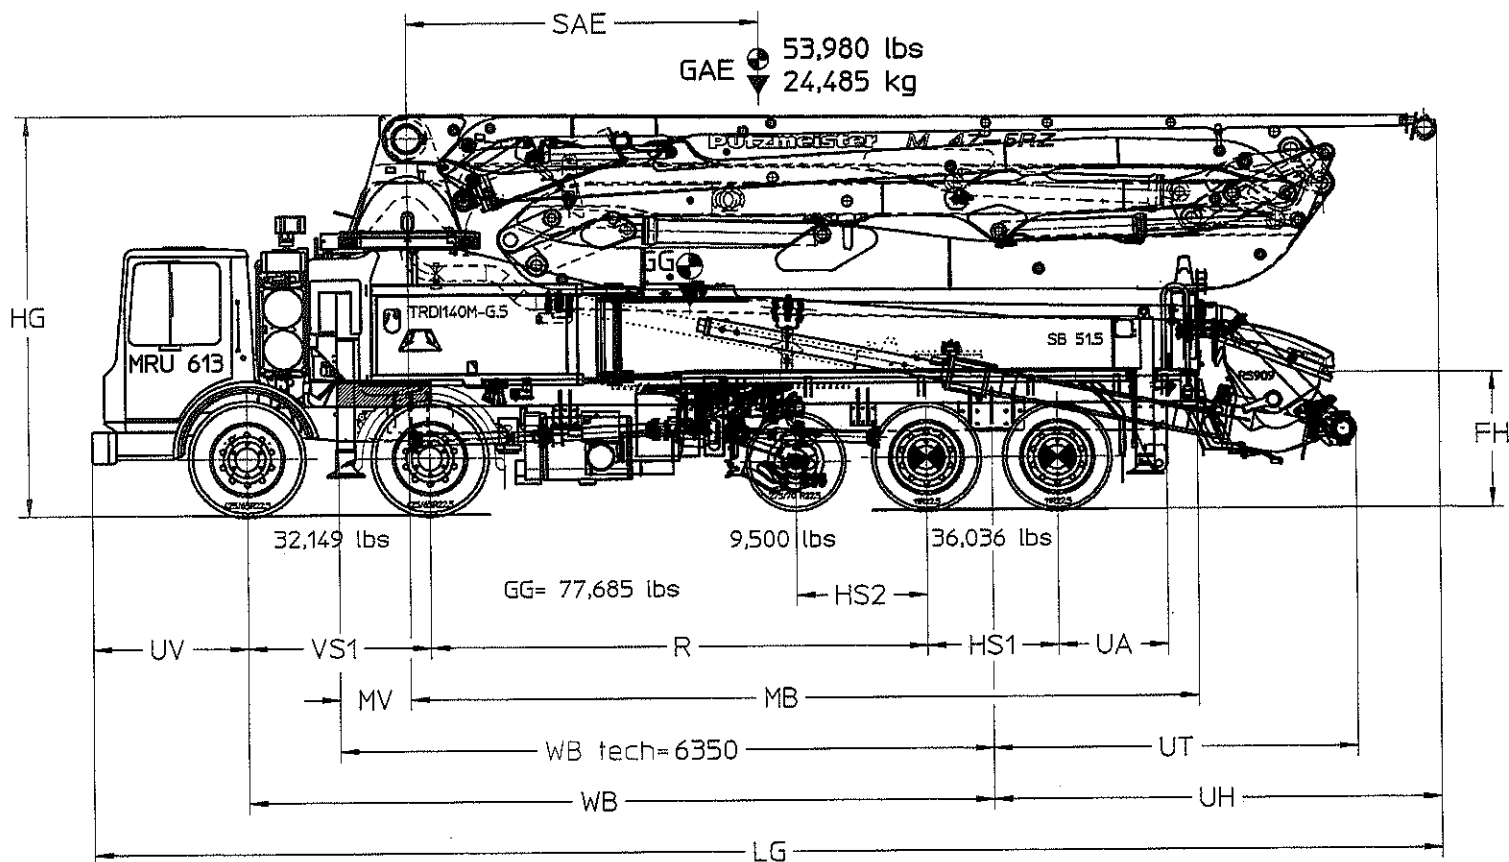

printed: 01/24/23 by OLSON

BSF 47-5 RZ.16H
Mack MRU613
TRDI 65, RS 909


	Front axle		Total		Rear axle	
	kg	lbs	kg	lbs	kg	lbs
Chassis weight	7378	16265	11041	24340	3663	8075
Actual weight						
Calculated weight	15782	34794	35299	77820	19517	43026
Maximum GVW (FBF)						
Maximum GVW (tech)	18144	40000	36288	80000	19960	44000

1) weights incl. Aluminum decks, 133 x 4 mm delivery line, 3 m end hose, full fuel tank (80 gal) and one driver

2) GAE includes 227 kg (500 lbs) ballast

Max. water tank capacity: 725 liters (190 gal)

All specifications regarding measurements and weights refer to standard, equipment, ready for operation, without water and special accessories. Weights and measurements are subject to change without notice.



Range Dia: A007623
Stability: A900245_11
ABUZ: A006843
Overhang: 60.0%

LG	HG	BG	WB	R	VS 1	VS 2	HS 1	HS 2	UV	UH	MV	MB	UA	UT	FH	SG	SAE
13096	3911	2489	7239	4826	1778	-	1270	1270	1508	4349	690	7660	1067	3536	1322	2361	3426
515.6	154.0	98.0	285.0	190.0	70.0	-	50.0	50.0	59.4	171.2	27.2	301.6	42.0	139.2	52.0	112.6	134.9

Putzmeister