



ADR Approved
L/17201/SNCH-TPM01/4986/1385



TOD-M 2000LT


**more sustainable
and environmentally
friendly future**

TOD-M 2000LT

1960-litre ADR-certified tank, with threaded GAS service plate (5 x 1/2' threads) with two pairs of 1/2' quick couplings, ROCHESTER level indicator, 3" filling nozzle, anti-tilt valve.

FEATURES	BENEFITS
1960 liter capacity	Approved for transporting diesel at full load under ADR regulations.
Fully Bunded 110% base	To retain all split fluids
Stackable design	Stackable design allowing up to three fully fueled tanks for improved storage efficiency.
Lockable access and storage hatch for added security	Internal space for an electric or hand pump, as well as generator feed and return hoses for up to two generators.
Flexible connectivity to suit multiple configurations.	Capable of supplying up to two generators while simultaneously refueling plant machinery.
Four fork pockets and four lifting eyes ensuring easy and safe maneuverability when full or empty.	Simple and easy maneuverability when full or empty
Protective galvanized framework with a durable powder-coated finish.	Robust and long-lasting construction suitable for any working environment.
Sized for convenient transport across a truck bed and designed to be stackable for container handling.	Simple, effective, and economical design enabling efficient movement via road transport and shipping.

STANDARD FEATURES

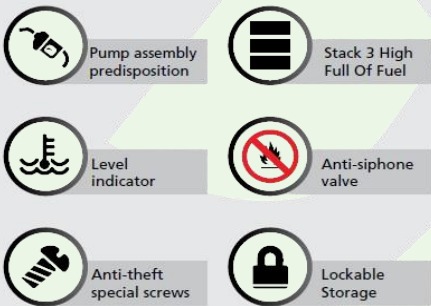

TECHNICAL SPECIFICATIONS

Dimensions (mm)	1178x2528x1330
Weight (Kg)	850 (empty)
Capacity (Lt)	1960
Max stacking loading	3 units
Thickness	mm 3
Support Base	mm 4

OPTIONAL FEATURES

