

GOUPIL G4

Version M – homologation KS



07/2020



4857



FM-464-HB



VRWGWMZZZL0K00225



Electric



2 places



PbSO4 11,5kW
(dernier remplacement: nc)



SOH 76%



Blanc

Description




Équipement Swapp Body | Plateau basculant 2 rideaux gauche et arrière avec rehausses grillagées

Cabine couleur blanc RAL 9003 conduite à gauche, avec pare-brise chauffant et direction assistée · Désembueur électrique | 700 W, pack rangement (coffre central + porte bouteille/documents), prise USB · Buzzer de marche avant / arrière, portes verre avec fermeture centralisée, protections de portes

Prise de charge ext. avec rallonge électrique 5 m, coffres de rangement latéraux, attelage mixte et prise remorque



TIPPER

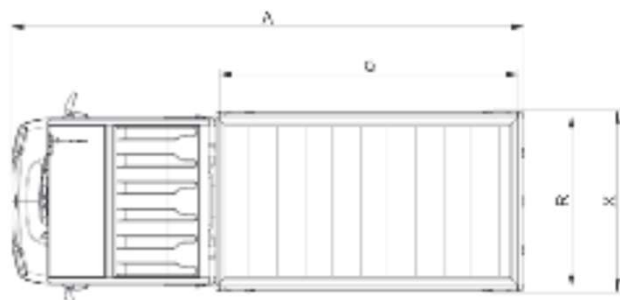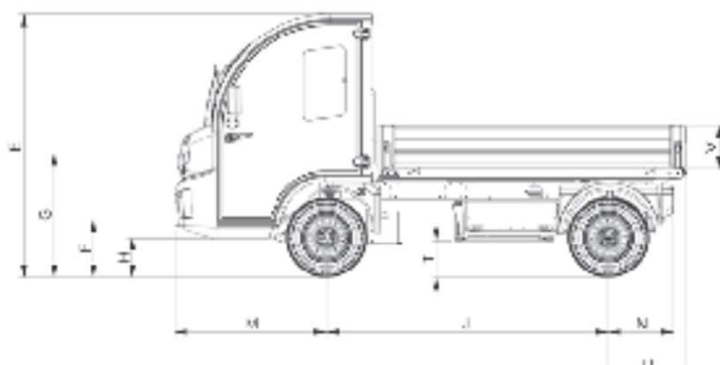

DIMENSIONS (mm)

A	B	C	D	E	F	G	H	I	J	K	L	M	N	P	Q	R	S	T	U	V	W	X
9675	1574	1305	1197	1825	425	807	288	175	2022	1021	1021	1089	468	788	2147	1224	2,6	270	554	308	122	1900

PERFORMANCE	Seats		2
	Type of certification		N1
	Engine		AC Induction / Asynchronous
	Maximum torque	Nm	57
	Nominal power	kW	10
	Controller		Curtis

BATTERY	Technology		Plomb Ouvert, 44élement de 2V			Lithium LiFePO4	
	Capacity	kWh	8,6	11,5	15,4	7,2	12
	Autonomy (R101 cycle)	Km	61	73	91	85	135
	Battery weight	Kg	325	410	403	92	132
	Charging time		8h30	7h45	6h15	5h30	5h30
	On board High frequency battery charger	A	30		50	50	
	Power supply		230V, 16A				
Auxiliary battery 12 v		Yes					

DIMENSIONS & CAPACITIES	Technically permissible maximum laden mass	Kg	2100				
	Mass in running order	Kg	1110	1203	1277	874	916
	Load capacity (driver included 75Kg)	Kg	990	897	823	1226	1184
	Towing capacity (unbraked trailer)	Kg	555	602	650	437	458
	Towing capacity (braked trailer)	Kg	1400				
	Weight of equipment	Kg	127				
	Load area	m2	2,6				
	Useful capacity with upper mesh cage	m3	2,9				
	Maximum tipping angle	°	47				
	Max height deck raised (with upper mesh cage)	mm	3080				
	Max height deck raised (without upper mesh cage)	mm	2545				
	Deck time lift (without load)	s	11				

EQUIPMENT

- 3 Folding aluminum side panels
- Lifting deck remote control
- Hydraulic cylinder with safety support stand (Compliant with S. Et standards)
- Optional: Upper mesh cage
- Option: Canvas or Net
- Option: Tie-down rings



Changes may occur in the product since the date of the material edition. Visits may show equipment or accessories available as standard or optional depending of each country. Technical specifications belong to standard versions, which may vary from country to country. All the characteristics of this document are indicative data. Goupil Industrie reserves the right to modify without notice. Please contact your distributor for the latest news.

