JA1-1

Alberta Government

CV8716936

80087100008716936

CERTIFICATE NUMBER

Commercial Vehicle Inspection Certificate
Traffic Safety Act

PART 1 - VEHICLE OWNER AND VEHICLE IDENTIFICATION

Vehicle Type:	Trailer	Seating Capacity:			
GVW:	kg	Brake Type:	Air		
Owner Name:	TST-CF EXPRESS				
Address:	2915, 5 AVE N				
City:	LETHBRIDGE	Province:	AB	Postal Code.	T1H0P2
Telephone Number:	(403) 320-5211				
Vehicle Identification Number:	5V8A5329GM601002				
Make:	VANGUARD	Model:	VIP		
Year:	2016	Unit Number:	5235321		
Odometer:	34541 KM	Licence Plate Number:	RF3432V	Province:	AB

IT IS AN OFFENCE TO FALSIFY AN INSPECTION CERTIFICATE


PART 2 - CERTIFICATION

I certify the vehicle described in Part 1 has passed the inspections and tests established under the Traffic Safety Act for a Commercial Vehicle.

Inspection Facility Name:	Facility Number:
A V Brake Ltd.	10727
Inspection Technician Name:	Technician Number:
Dustin Adams	D3309

Inspection Technician Signature:	
Inspection Date:	2026/10/09

Version No:2

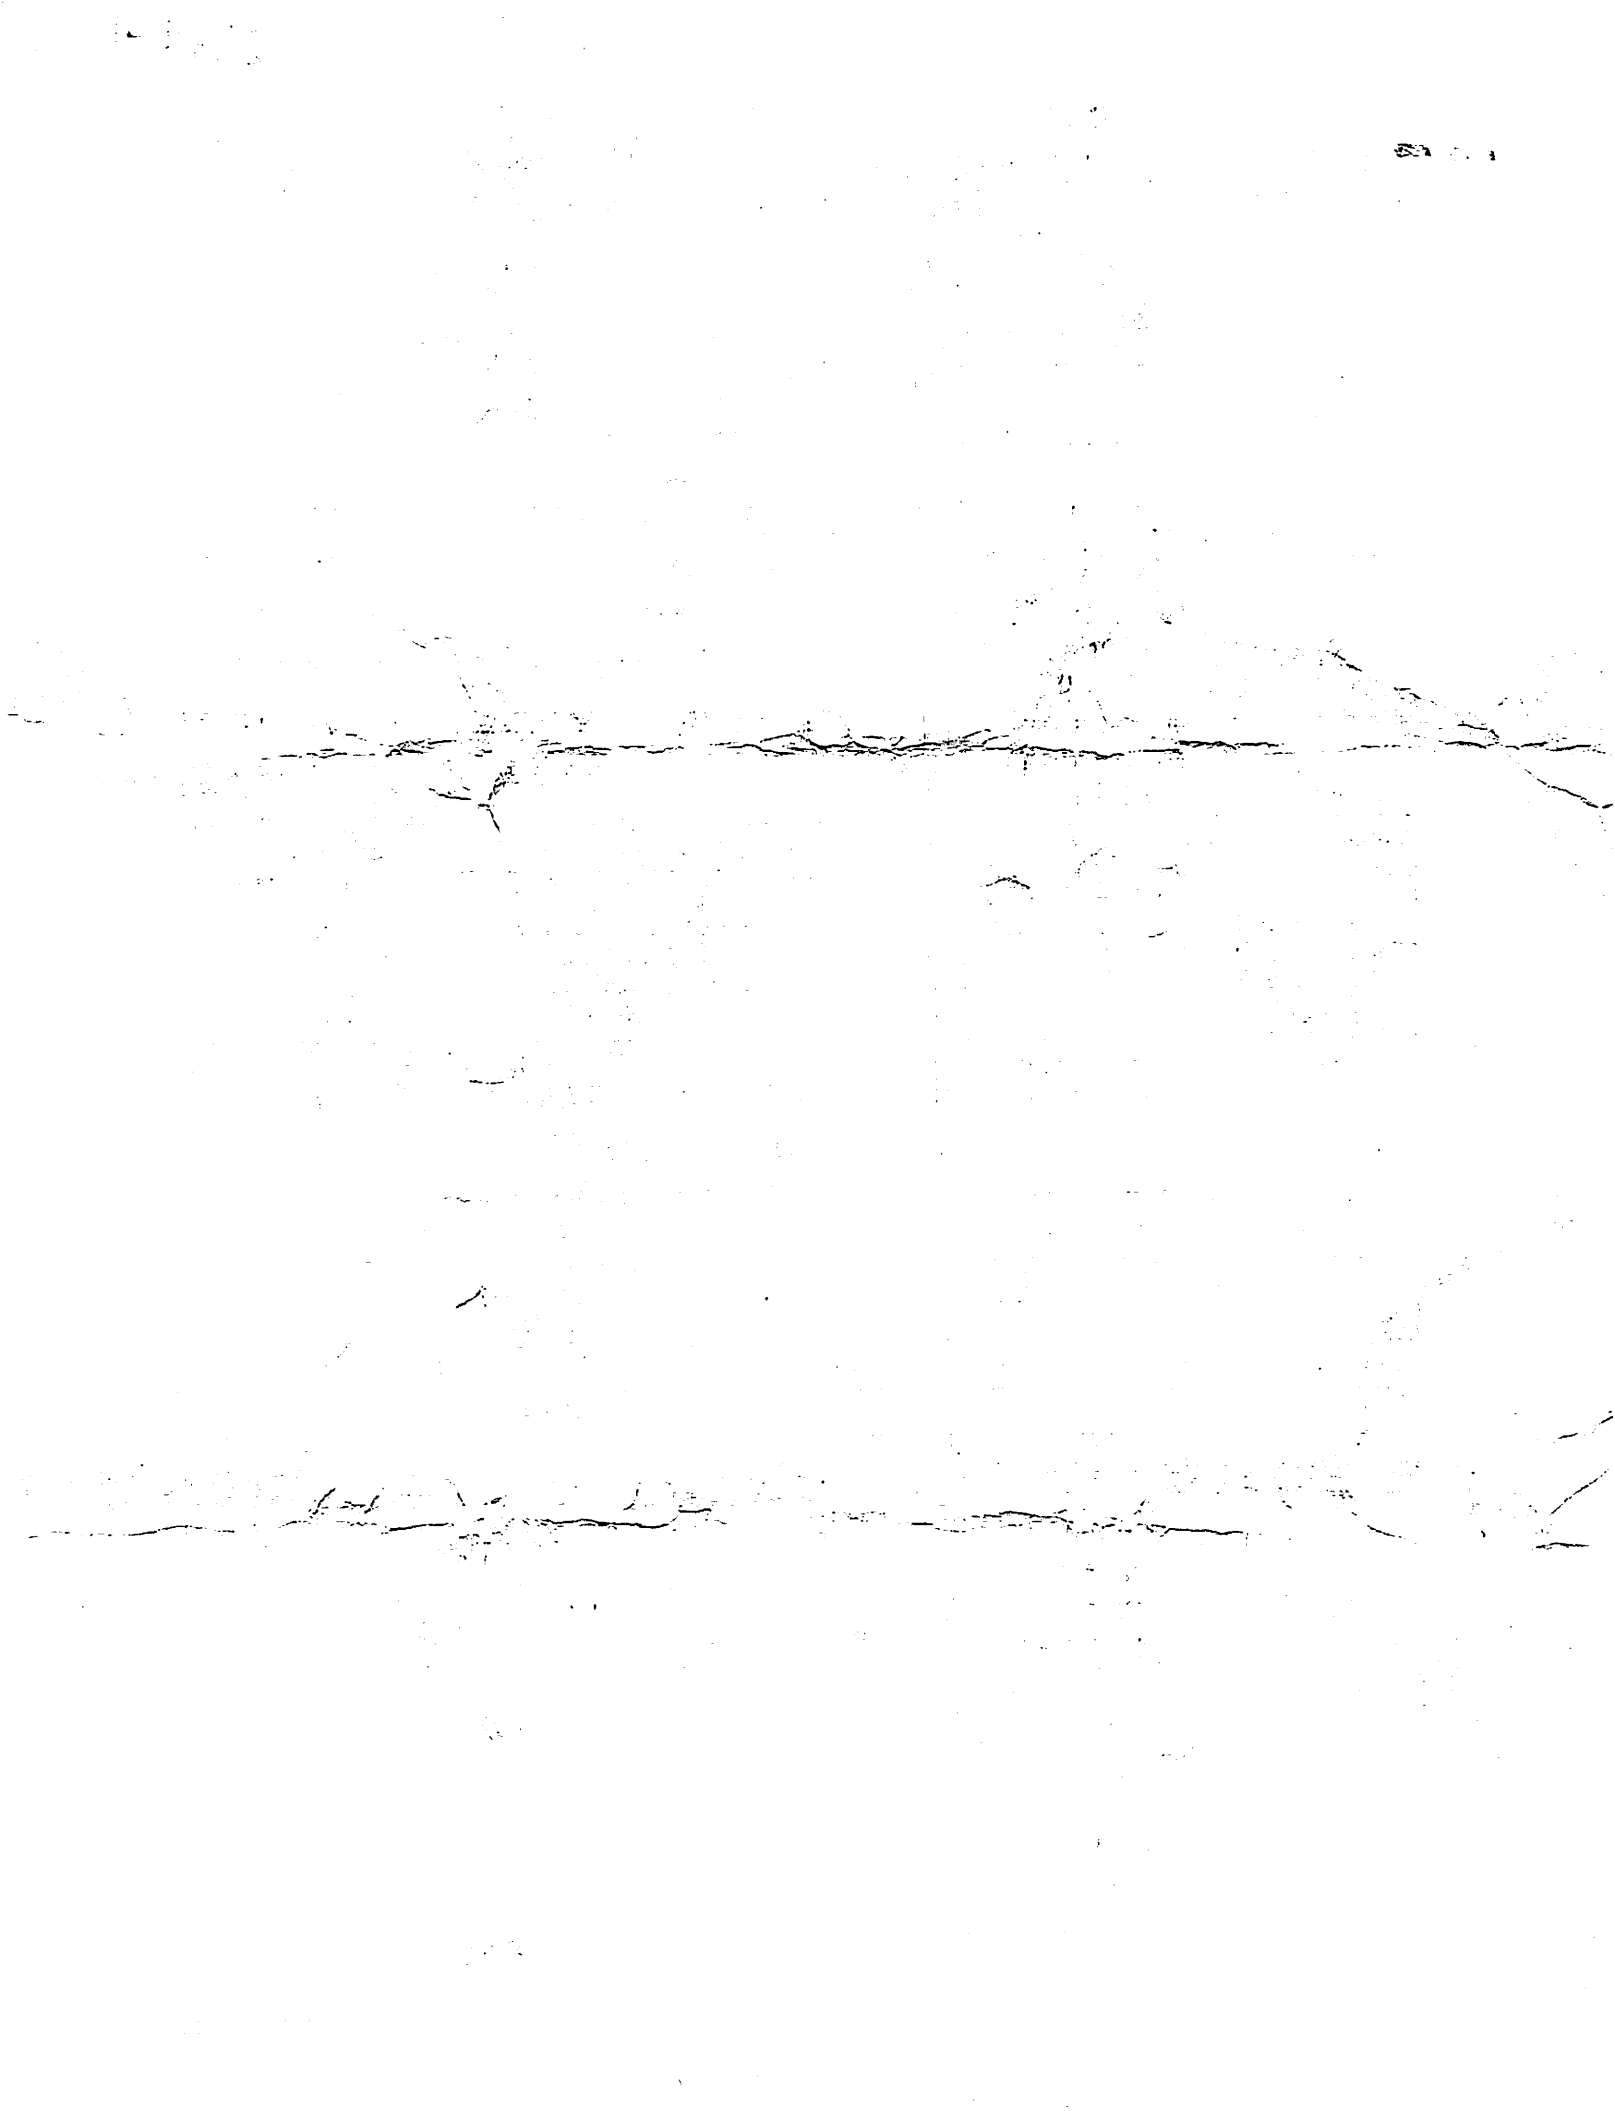

Alberta Government

COMMERCIAL VEHICLE RECORD OF INSPECTION
TRAILER, SEMI-TRAILER, C-DOLLY, CONVERTER DOLLY

The original Record of Inspection must be given to the customer regardless of whether the vehicle passes or not.

Type of Vehicle	Gross Vehicle Weight registered
Trailer	kg

Vehicle Information

VIN	5	V	8	A	5	3	2	9	G	M	6	0	1	0	0	2	

Unit Number	Year	Make	Model	Odometer
5235321	2016	VANGUARD	VIP	34,541

Registered Owner's Name	Plate Number
TST-CF EXPRESS	RF3432V


Address	Postal Code	Phone Number
2915, 5 AVE N	T1H0P2	(403) 320-5211

Drum Brakes: A-Full Inspection with Drum Removed Disc Brakes:

	LEFT		FRONT	RIGHT		
105 psi / 3 mm	101 psi / 5 mm		419.61 mm	Drums/Rotors	419.35 mm	105 psi / 6 mm	105 psi / 6 mm
			19 mm	Linings/Pads	20 mm		
			47 mm	Push Rod Travel	49 mm		
103 psi / 10 mm	96 psi / 8 mm		420.17 mm	Drums/Rotors	420.17 mm	96 psi / 11 mm	106 psi / 11 mm
			17 mm	Linings/Pads	17 mm		
			45 mm	Push Rod Travel	32 mm		
___ psi / ___ mm	___ psi / ___ mm		___ mm	Drums/Rotors	___ mm	___ psi / ___ mm	___ psi / ___ mm
			___ mm	Linings/Pads	___ mm		
			___ mm	Push Rod Travel	___ mm		
___ psi / ___ mm	___ psi / ___ mm		___ mm	Drums/Rotors	___ mm	___ psi / ___ mm	___ psi / ___ mm
			___ mm	Linings/Pads	___ mm		
			___ mm	Push Rod Travel	___ mm		
___ psi / ___ mm	___ psi / ___ mm		___ mm	Drums/Rotors	___ mm	___ psi / ___ mm	___ psi / ___ mm
			___ mm	Linings/Pads	___ mm		
			___ mm	Push Rod Travel	___ mm		
___ psi / ___ mm	___ psi / ___ mm		___ mm	Drums/Rotors	___ mm	___ psi / ___ mm	___ psi / ___ mm
			___ mm	Linings/Pads	___ mm		
			___ mm	Push Rod Travel	___ mm		

Park Brake Lining Left NA mm Right NA mm Trans NA mm

Wheel Torque Checked ☑ Inner NA ft lbs Outer 475 ft lbs

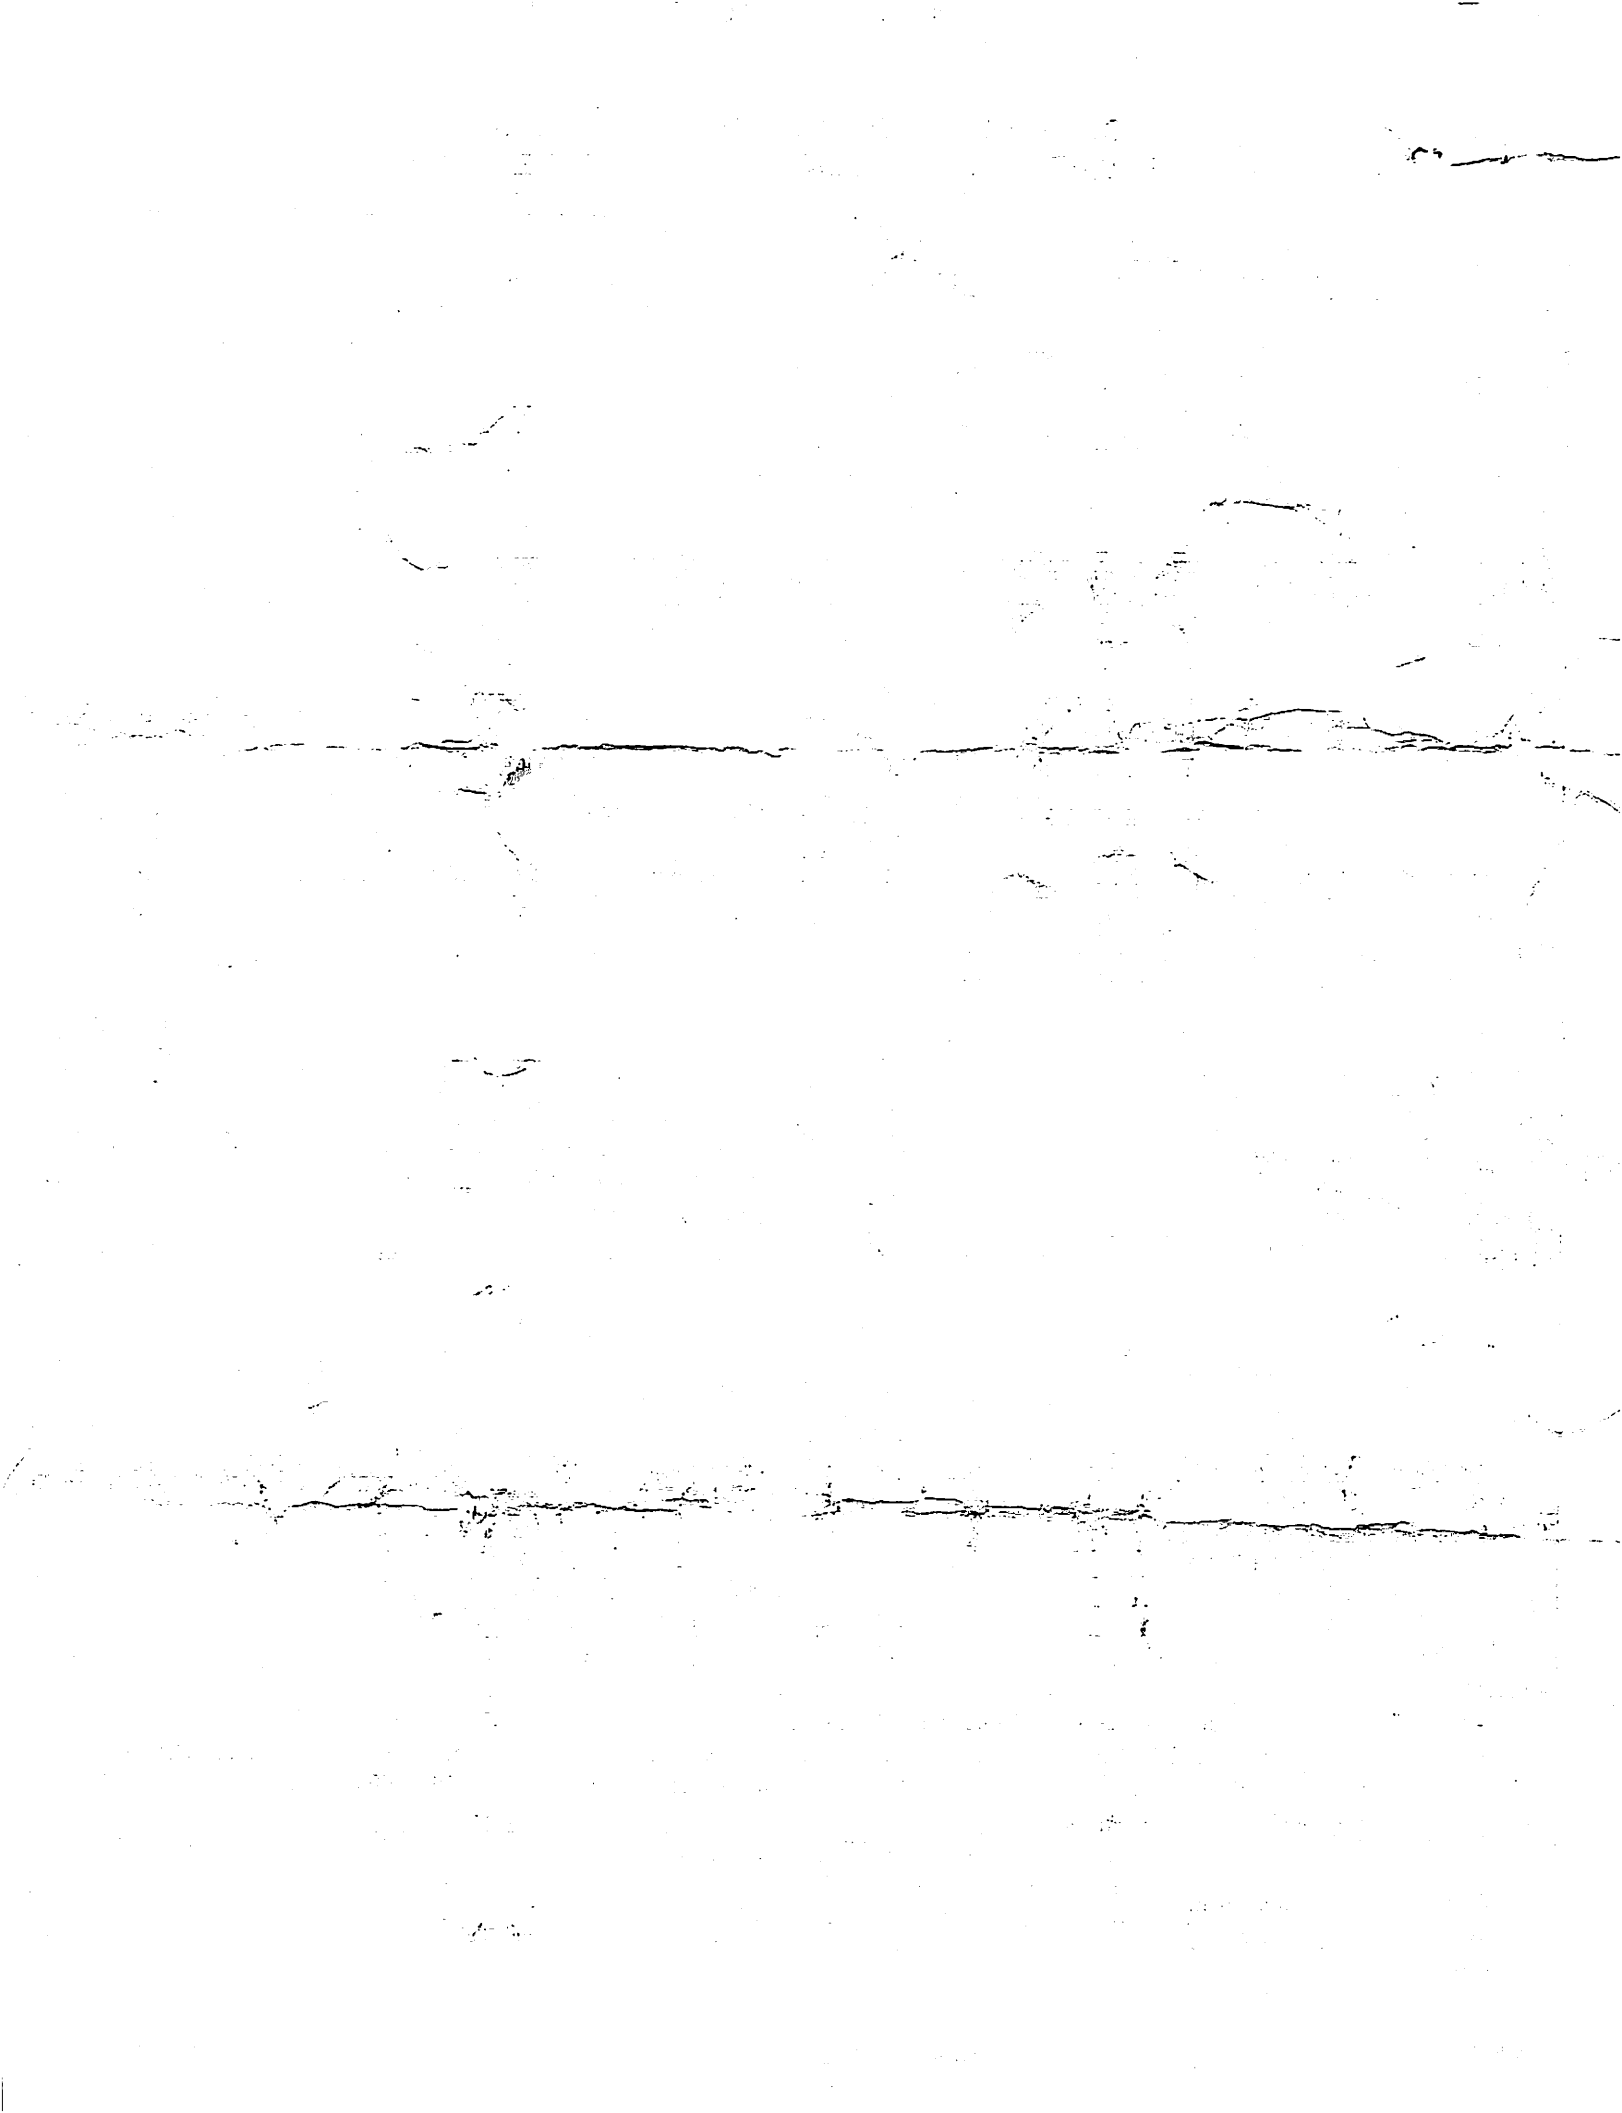

COMMERCIAL VEHICLE RECORD OF INSPECTION
TRAILER, SEMI-TRAILER, C-DOLLY, CONVERTER DOLLY

Section 1 - Power Train

Component	P	F	NA	Component	P	F	NA
1.2. Exhaust System			✓	1.12. Gasoline or Diesel Fuel System (LPG, CNG, & LNG) * SEE APPENDIX A*			✓

NOTES:

APPENDIX "A"

Component	P	F	NA	Component	P	F	NA
A.1. Liquefied Petroleum Gas (LPG or Propane) Fuel System			✓	A.3. Liquefied Natural Gas (LNG) Fuel System			✓
A.2. Compressed Natural Gas (CNG) Fuel System			✓				

NOTES:

Section 2 - Suspension

Component	P	F	NA	Component	P	F	NA
2.1. Suspension & Frame Attachments	✓			2.5. Air Suspension	✓		
2.2. Axle Attaching & Tracking Components	✓			2.6. Self-Steer & Controlled-Steer Axle			✓
2.3. Axle & Axle Assembly	✓			2.7. Shock Absorber/Strut Assembly	✓		
2.4. Spring & Spring Attachment	✓						

NOTES:
2.1 ALL PIVOT WASHERS CUPPING(NOT A FAIL)

Section 3H - Hydraulic Brakes

Component	P	F	NA	Component	P	F	NA
3H.1. Hydraulic System Components			✓	3H.10. Electric Brake System			✓
3H.6. Air-Over-Hydraulic Brake System			✓	3H.12. Drum Brake System Components			✓
3H.7. Surge Brake Controller			✓	3H.13. Disc Brake System Components			✓
3H.8. Vacuum System			✓	3H.19. Brake Performance			✓
3H.9. Air-Boosted Trailer Brake System			✓				

NOTES:


Section 3A - Air Brakes

Component	P	F	NA	Component	P	F	NA
3A.3. Air System Leakage	✓			3A.16. S-Cam Drum Brake System	✓		
3A.4. Air Tank	✓			3A.17. Brake Shoe Travel (Wedge Brakes)			✓
3A.8. Brake Valves & Controls	✓			3A.18. Disc Brake System Components			✓
3A.12. Parking Brake & Emergency Application	✓			3A.20. Anti-Lock Brake System (ABS)	✓		
3A.13. Air System Components	✓			3A.22. Stability Control System (ESC) or (RSS)			✓
3A.14. Brake Chamber	✓			3A.23. Brake Performance			✓
3A.15. Drum Brake System Components	✓						

NOTES:
3A.3 REAR SERVICE GLADHAND LEAKING DURING BRAKE APPLICATION(REPAIRED AT AV BRAKE)
3A.14 ALL CLEVOUS PINS SEIZED IN CLEVOUS'S(REPAIRED AT AV BRAKE)/1PS+2PS SLACK ADJUSTER ANCHOR PINS(REPAIRED AT AV BRAKE)/BUSHINGS WORN OUT(REPAIRED AT AV BRAKE)/ALL PUSHRODS SHORT(1PS 1/2, 1DS,2DS,2PS 1/4")(ADJUSTED AT AV BRAKE)

Section 4 - Steering

Component	P	F	NA	Component	P	F	NA
4.1. Steering Control & Linkage			✓	4.5. Self Steer & Controlled-Steer Axle			✓
4.4. Kingpin			✓				

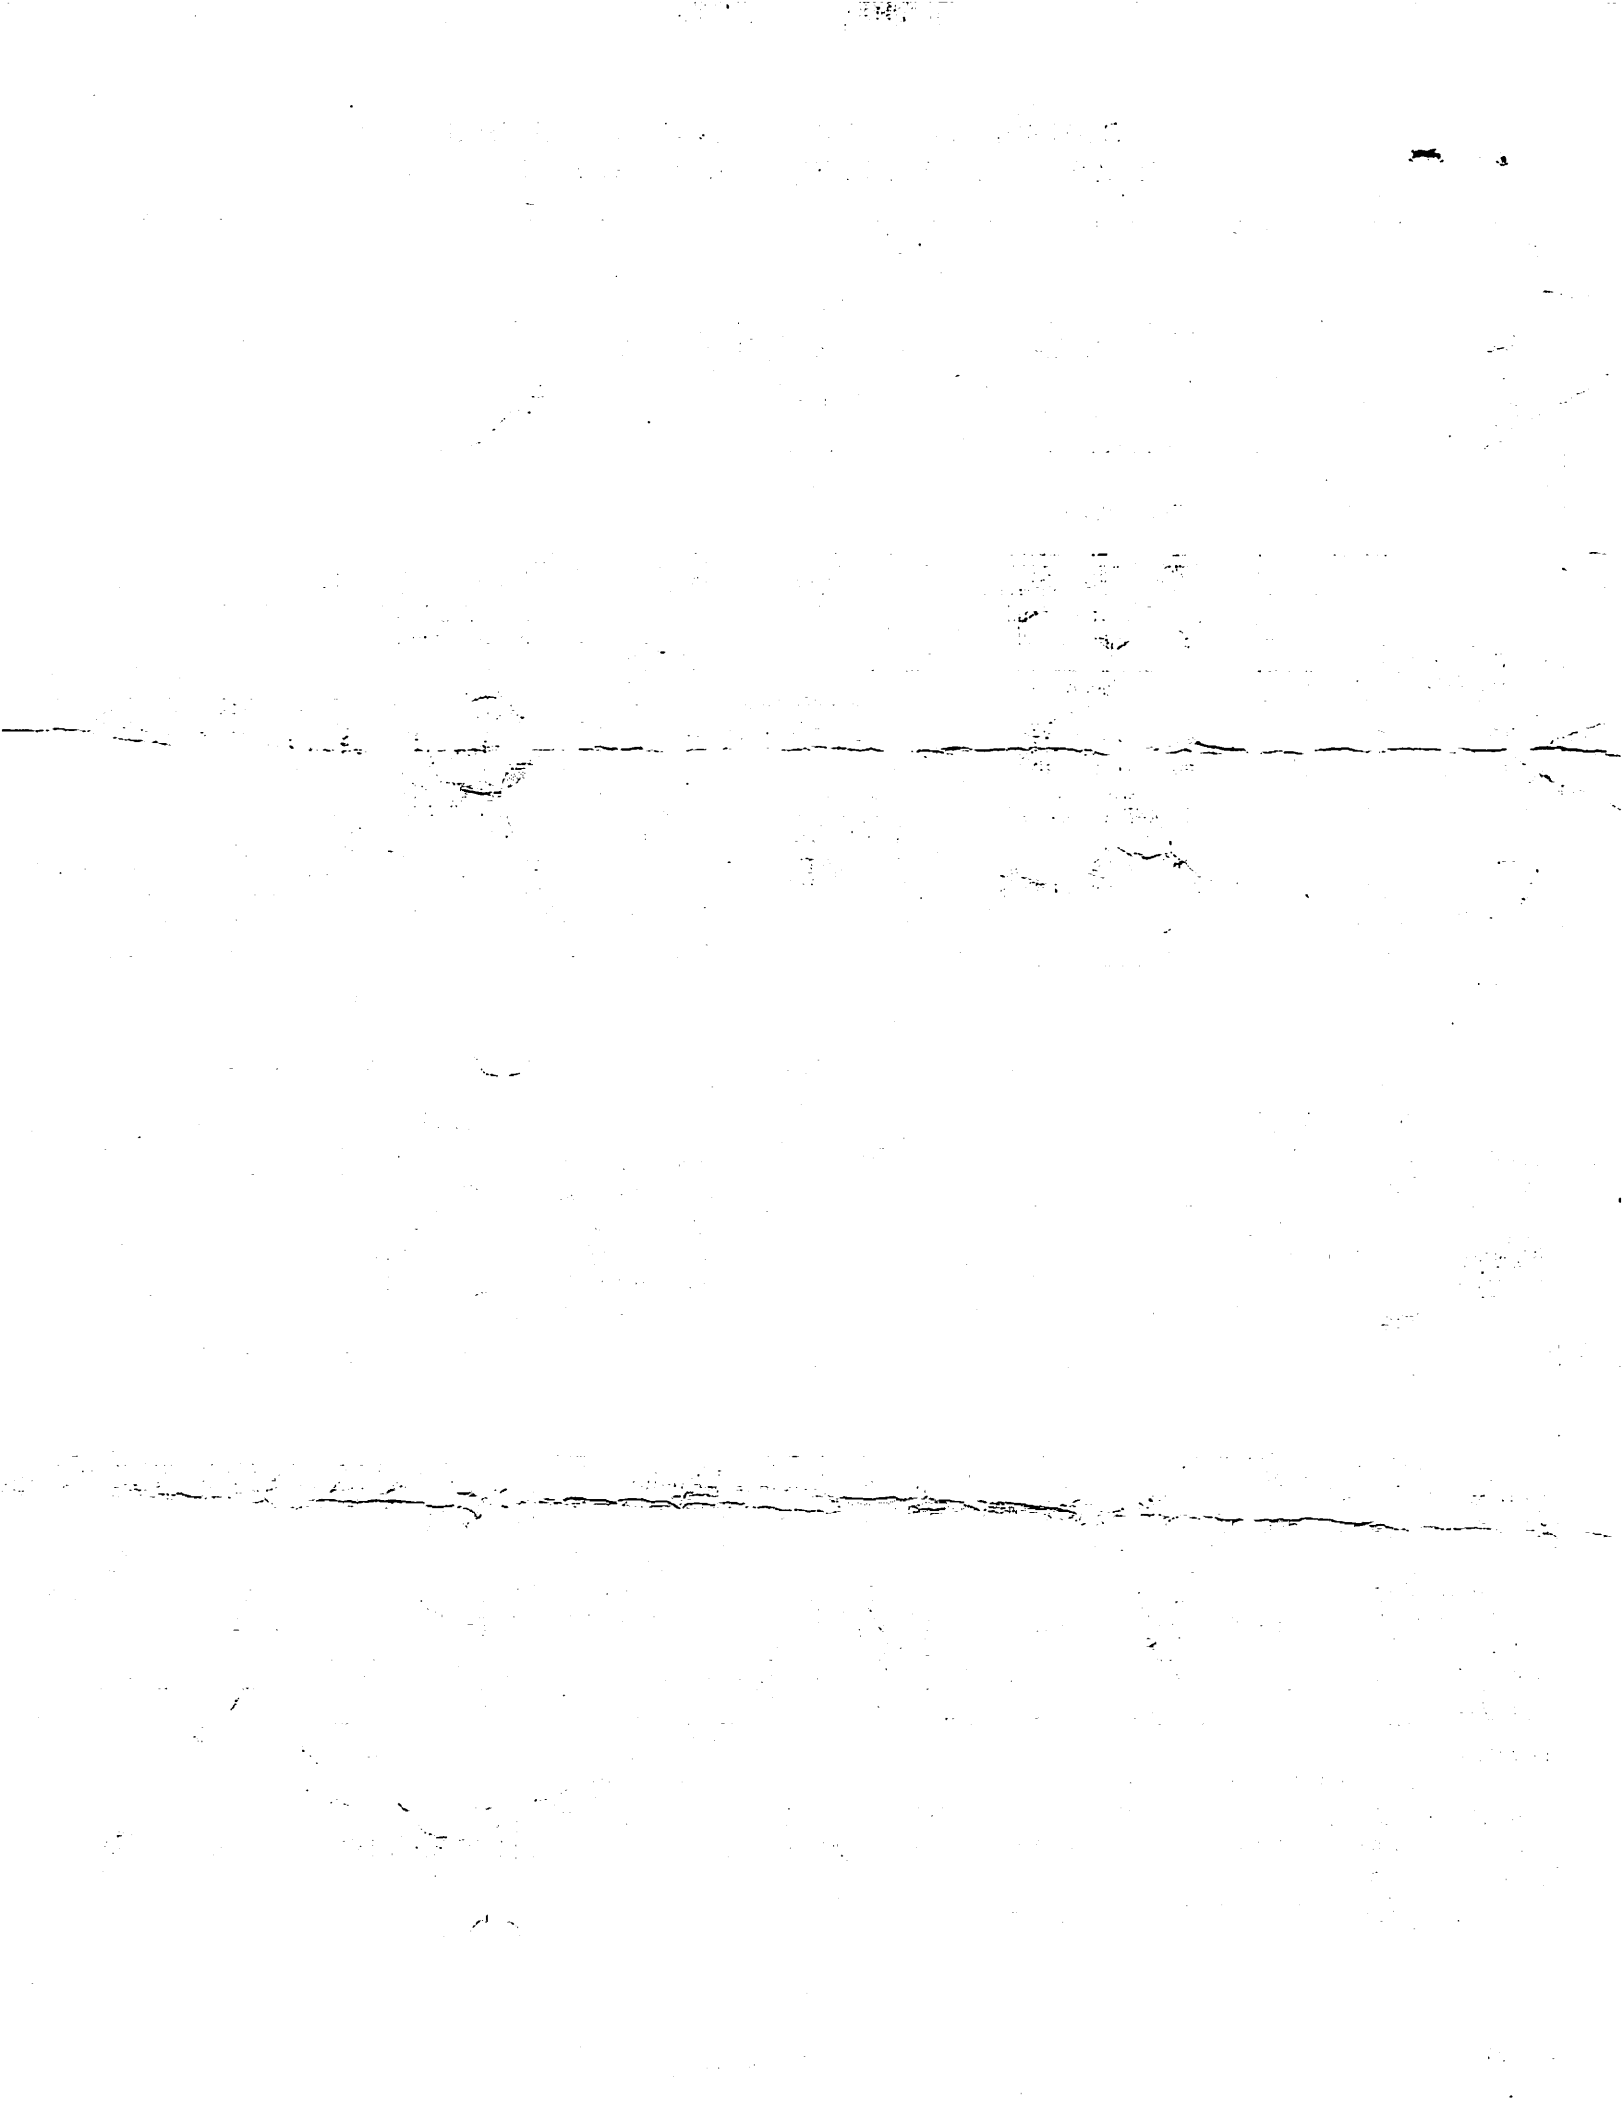

COMMERCIAL VEHICLE RECORD OF INSPECTION
TRAILER, SEMI-TRAILER, C-DOLLY, CONVERTER DOLLY

NOTES:

Section 5 - Instruments and Auxiliary Equipment

Component	P	F	NA	Component	P	F	NA
5.1. Fire Extinguisher			✓				

NOTES:

Section 6 - Lamps

Component	P	F	NA	Component	P	F	NA
6.1. Required Lamps	✓			6.3. Retro-Reflective Marking	✓		
6.2. Reflex Reflector	✓						

NOTES:
6.2 DS FRONT REFLECTIVE TAPE PEELING+REAR LOWER DOT BAR TAPE PEELING(REPAIRED AT AV BRAKE)

Section 7 - Electrical System

Component	P	F	NA	Component	P	F	NA
7.1. Wiring			✓	7.3. Trailer Cord (output to towed vehicle)			✓
7.2. Battery			✓				

NOTES:

Section 8 - Body

Component	P	F	NA	Component	P	F	NA
8.5. Cargo Body	✓			8.11. Refrigeration/Heater Unit Fuel System			✓
8.6. Frame Rails & Mounts	✓			8.21. Fender/Mud Flap			✓
8.7. Unitized Body Elements			✓	8.22. Landing Gear on Trailer	✓		
8.8. Cab or Cargo Door	✓			8.23. Sliding Axle Assembly (Sliding Bogie)	✓		
8.9. Cargo Tank or Vessel			✓	8.24. Aerodynamic Device & Attachment			✓
8.10. Body, Device or Equipment Attached or Mounted to the Vehicle	✓			8.25. Rear Impact Guard (RIG)	✓		

NOTES:

Section 9 - Tires and Wheels

Component	P	F	NA	Component	P	F	NA
9.1. Tire Tread Depth	✓			9.7. Wheel/Rim	✓		
9.2. Tire Tread Condition	✓			9.8. Multi-Piece Wheel/Rim			✓
9.3. Tire Sidewall & Manufacturer Markings	✓			9.9. Spoke Wheel/Demountable Rim System			✓
9.4. Tire Inflation Pressure	✓			9.10. Disc Wheel System			✓
9.5. Wheel Hub	✓			9.11. Wheel Fasteners (Nuts, Bolts,& Studs)	✓		
9.6. Wheel Bearing	✓						

NOTES:
9.4 ALL TIRES FILLED TO 105 PSI/
9.5 2PS WHEEL SEAL LEAKING GREASE ONTO BRAKE SHOES(REPAIRED AT AV BRAKE)
9.6 1DS WHEEL BEARING HAS EXCESSIVE FREE PLAY(ADJUSTED AT AV BRAKE)/2PS BEARINGS HAVE EXCESSIVE PRE-LOAD(REPAIRED AT AV BRAKE)
9.11 ALL WHEELS TORQUED TO 475 FT LBS

COMMERCIAL VEHICLE RECORD OF INSPECTION
TRAILER, SEMI-TRAILER, C-DOLLY, CONVERTER DOLLY

Section 10 - Couplers and Hitches

Component	P	F	NA	Component	P	F	NA
10.1. Hitch Assembly, Structure & Attaching Components	✓			10.6. Automated Coupling Device			✓
10.2. Secondary Attachment (Safety Chain or Cable)			✓	10.7. Fifth Wheel Coupler			✓
10.3. Pintle Hook, Pin Hitch, or Coupler Hitch			✓	10.8. Oscillating Fifth Wheel Coupler			✓
10.4. Ball Type Hitch			✓	10.9. Ball-Bearing Type Turntable on Trailer			✓
10.5. Roll-Coupling Hitch			✓				

NOTES:
10.1 REAR OF 5TH WHEEL HITCH PIN HAS 1/8" GAP @ 11' MARK(NOT A FAIL)

Certification

The Vehicle for which this Record of Inspection is issued has PASSED (Certificate #8716936) the inspection and I certify it has been inspected in accordance with the Vehicle Inspection Regulation, Alberta Regulation 211/2006 and the applicable Inspection Manual.

Date of Inspection	Technician Number	Facility Number	Signature
2026/10/09	D3309	10727	Al Bagur

Customer Acknowledgment

I understand if a vehicle inspection identifies defects and repairs are required, once repaired, the vehicle and this Record of Inspection (ROI) may be presented to any Vehicle Inspection Facility within 10 days of the initial inspection and only the failed items noted on this ROI are required to be re-inspected. If the vehicle is not returned for re-inspection within 10 days of the initial date of inspection, a new inspection must be conducted.

Date (Year/Month/Day)
2026/10/09

Customer Signature