



Brandt Tractor Peterbilt (C220)
303 50Th Street East
Saskatoon, Saskatchewan S7K 6C1

Pure Ag Ltd
Box 4617
Melfort, Saskatchewan S0E 1A0
Canada

Jeff Neu
Cell Phone: 306-491-2127
Office Phone:
Email: jneu@brandt.ca

Vehicle Summary

Unit		Chassis	
Model:	Model 389	Fr Axle Load (lbs):	13200
Type:	Tractor	Rr Axle Load (lbs):	40000
Description 1:	389x cummins	G.C.W. (lbs):	110000
Description 2:			
Application		Road Conditions:	
Intended Serv.:	General Freight	Class A (Highway)	100
Commodity:	Other Commodity	Class B (Hwy/Mtn)	0
		Class C (Off-Hwy)	0
		Class D (Off-Road)	0
Body		Maximum Grade:	
Type:			6
Length (ft):	0	Wheelbase (in):	265
Height (ft):	0	Overhang (in):	56
Max Laden Weight (lbs):	0	Fr Axle to BOC (in):	100.6
Trailer		Cab to Axle (in):	164.4
No. of Trailer Axles:	2	Cab to EOF (in):	220.4
Type:	Van	Overall Comb. Length (in):	906
Length (ft):	53	Special Req.	
Height (ft):	13.5		
Kingpin Inset (in):	36		
Corner Radius (in):	2		
Restrictions			
Length (ft):	65		
Width (in):	102		
Height (ft):	13.5		

Approved by: _____

Date: _____

Note: All sales are F.O.B. designated plant of manufacture.



Sales Code	Std/ Opt	Description	Weight
Base Model			
0003891	S	Model 389 The Model 389 embodies the Peterbilt heritage and merges it with a proven design to create a legendary classic for vocational applications. The lightweight, all-aluminum cab with lap seam construction, aircraft grade fasteners and bulkhead style doors is legendary for its durability. The pod-mounted headlamps are durable, corrosion-resistant and cost-effective to replace. Peterbilt's all-aluminum cab is not only extremely durable, it's also lightweight to allow for increased payloads to maximize performance and profitability.	14,650
0091200	S	Other Commodity	0
0093170	S	General Freight Truck or tractor used in over-the-road hauling of general freight. Pickup to delivery distance is typically over 100 miles and annual mileage is typically over 60,000 miles per year. Operation is typically on-highway.	0
0096010	S	Van An enclosed box trailer without temperature control. Designed to carry pallets or boxes of cargo or equipment.	0
0098020	O	Canadian Registry Canadian Registry Required for all vehicles registered in Canada.	0
0098060	O	Severe Service Category Number Two Severe Service Category Number Two For all Canadian conventional model trucks with GCW's greater than 95,000 lbs.	0
Configuration			
0200009	O	Omit Dual Compliance (Canadian Registry)	0
0200389	O	389X Package	0
0200700	S	Not Applicable Secondary Manufacturer	0
Frame & Equipment			
0514000	O	10-3/4" Steel Rails To 354" 10.75x3.5x.375 Dimension, 2,136,000 RBM; Yield Strength: 120,000 psi. Section Modulus: 17.8 cubic inches. Weight: 1.74 lbs/inch pair	409
0611330	O	Zinc Coated Anti Corrosion Treated Frame Rails Requires Frame Rail Code. Zinc Phosphate coating will replace the standard frame rail primer and provide added corrosion prevention for your customer's operating in severe conditions or in climates where vehicle rust is common.	0
0611790	O	Aluminum Frame Rail Crossmembers Excludes suspension	-60
0644000	S	EOF Tractor Tapered with Crossmember Includes Kingpin Cutout	0
0651800	O	Peterbilt Rear Mudflaps, Stainless Steel Premium	10

Price Level: January 1, 2023

Deal: 389x cummins

Printed On: 3/14/2023 4:01:48 PM

Date: March 14, 2023

Quote Number: QUO-1020050-W7R4L6



Sales Code	Std/ Opt	Description	Weight
		Peterbilt Rear Mudflaps, Hangers, Stainless Steel Premium. (Requires two additional inches of overhang for tractors). Mudflaps aid in protecting the frame and undercarriage from road salt, grime and debris that can cause rust and corrosion. Mud flaps also shield other vehicles from gravel, rocks and road spray.	
0672200	O	Hogebuilt 30" 304 Mirror SS Quarter Fender Hogebuilt 30" 304 Mirror Stainless Steel Quarter Fender, are composed of premium 304 stainless steel with a mirror finish that provides a lasting image. A Triangle Bracket, Black Peterbilt top flap, Single Post included.	30
0835960	O	Holland FW33 Fifth Wheel Top Plate The FW33 is designed specifically for the vocation industry. The FW33 Series eliminates the use of grease on the top plate surface and between the top plate and bracket.	255
0870100		Rear Or Fixd Setting Bhd C/L Bogie 010.	0
0890090	O	LH Fifth Wheel Release	0
0890560	O	8.6in - 9.25in Fifth Wheel Height	99
0890643	O	Holland Heavy Duty Air Slide Required with suspensions >40k / No Tilt	50
0891240	O	24" Air Slide	216
0940330	S	No Access Package or Deckplate Desired Use with tractors without access package or deckplate	0
Front Axle & Equipment			
1011840	O	Dana Spicer E1322IL 13,200 lb, 3.5 in. Drop Axle is designed for applications with a gross axle weight rating (GAWR) of 13,200 pounds. The axles have exclusive one-piece forged design knuckle including steer arm, tie rod arm and spindle. This feature helps in greater durability and reduced maintenance.	-26
1111100	O	Peterbilt Front Air Leaf, Shocks 13,200 lb Peterbilt front air leaf suspension offers lightweight components, that handle with the performance of a taper leaf suspension without the added weight. Compatible with air disc or drum brakes.	29
1243000	S	Power Steering Sheppard M100 For use with 10,000 to 13,200 lb. axle ratings. Glidekote splines on steering shaft extend service life of components.	0
1250180	S	Power Steering Reservoir Frame Mounted The power steering reservoir is a steering system that eases drivability by applying hydraulic pressure to the steering gear.	0
1353550	S	PHP10 Aluminum PreSet PLUS Hubs Air Disc PHP10 aluminum PreSet PLUS hubs air disc have a fully integrated spindle nut design, an optimized wheel spacer, magnetic fill plug, with a seal and bearings. Use with Front Axle.	0
1380070	O	Greasable Front Spring Pins	0
1380080	O	Dual Height Control Valve	0

Price Level: January 1, 2023

Deal: 389x cummins

Printed On: 3/14/2023 4:01:48 PM

Date: March 14, 2023

Quote Number: QUO-1020050-W7R4L6



Sales Code	Std/ Opt	Description	Weight
		For Peterbilt Front Air Leaf. Provides direct control of front suspension ride height on both sides of the vehicle.	
1380230	O	Dana Spicer 5" Drop IPO 3.5", Front Axle 5" drop (127 MM) provides lower chassis suspension and profile. Offers maximum maneuverability and the light weight solution. Available for a variety of brakes.	60
1380240	O	Dana Spicer Wide Track IPO Standard Dana Spicer wide track front axles offer added stability and deliver greater turn angles. 71in KPI IPO 69in for E1202, E1322, E1462, D2000F front axles.	15
1380290	S	Bendix Air Disc Front Brakes Bendix air disc front brakes use a floating caliper design to provide foundation braking on all axles and complies with reduced stopping distance regulations.	0
1391490	O	Pad And Rotor Dust Shields for Air Disc Brakes Front Axle	7
Rear Axle & Equipment			
1523310	O	Dana Spicer DSH40 40,000 lb, High Performance 40 Interaxle diff lock air rocker occupies space of one gauge. Laser factory axle alignment to improve handling & reduce tire wear. Magnetic rear axle oil drain plug captures & holds any metal fragments in drive axle lube to extend service life. Parking brakes on all drive axles for optimal performance. Cognis EMGARD® FE 75W-90 synthetic axle lube provides over 1% fuel economy improvement. Reduces wear & extends maintenance intervals, resulting in increased uptime. Provides improved fluid flow to protect components in extreme cold conditions & withstand the stress from high temperatures, extending component life.	179
1616290	S	PHP10 Aluminum PreSet PLUS Hubs	0
1660000	O	Dust Shields For Cam Brakes, Drive Axle(s)	4
1673090	O	Separate Dash Controls, Cont Trac Full Lock Dana Spicer or Meritor - Tandem or Tri-Drive Axles (Air Rocker Switch occupies the space of two gauges for tandem axle and three gauges for tri-drive axle)	2
1680390	S	Bendix ESP Electronic Stability Program With ATC Tractor service only. The Bendix ESP system is designed to continuously monitor a variety of vehicle parameters and sensors to determine if the vehicle is reaching a critical stability threshold. If such a situation develops, the system will quickly and automatically intervene to assist the driver by selectively applying tractor and trailer brakes, and de-throttling the engine.	0
1680470	O	Lube Pump, Drive Axle(s) Used to circulate oil within the axle housing. Recommended for use on 46,000 or greater axles used in refuse or severe service applications.	36
1680490	O	Gusseted Cam Brackets, Drive Axle(s)	2
1682430	O	Anti-Lock Braking System (ABS) 4S4M ABS-6. Includes air braking system.	-30

Price Level: January 1, 2023

Deal: 389x cummins

Printed On: 3/14/2023 4:01:48 PM

Date: March 14, 2023

Quote Number: QUO-1020050-W7R4L6



Sales Code	Std/ Opt	Description	Weight
1684200	S	Synthetic Axle Lubricant All Axles Peterbilt heavy duty models include Fuel Efficient Cognis EMGARD FE75W-90 which provides customers performance advantages over current synthetic lubricants with reduced gear wear and extended maintenance intervals, resulting in increased uptime. In addition, the lubricant provides improved fluid flow to protect gears in extreme cold conditions and withstand the stress from high temperatures, extending component life.	0
1687010	S	Bendix Air Cam Rear Drum Brakes 16.5x7 Bendix Air Cam Rear Drum Brakes to fit all heavy haul, construction, refuse and highway truck and tractor applications. Includes Automatic Slack Adjusters & Outboard Mounted Brake Drums.	0
1687090	O	Diff Lock Tandem Axles With Speed Interlock. Automatically Disengages Wheel Diff Lock at Speeds Above 25 mph.	60
1688110	O	Heavy Duty Cam Bushings, Drive Axle(s)	0
1703700	O	Ratio 3.70 Rear Axle	0
1821990	O	Peterbilt Low Low Air Leaf 40,000 lb, 52in Axle Spacing, Light Weight.	-79
1922260	O	Dash Mtd Dump Switch with Indicator Light Dash mounted dump switch with indicator light for suspension.	2
1922390	O	Heavy-Duty Tracking Rods For use with Peterbilt Air Leaf, Low Air Leaf, Low Low Air leaf, or 40,000 lb Air Trac (standard on 44,000 lb Air Trac).	11

Engine & Equipment

2059915	O	X15 500@1700 GOV@1700 1850@950 Efficiency Series (2021 Emissions)	465
		N21350 C121 64....Maximum Accelerator Vehicle	
		N21370 C128 64....Maximum Cruise Control Speed	
		N21460 C132 1400..PTO Maximum Engine Speed	
		N21520 C133 5.....Idle Shutdown Timer	
		N21610 C188 39....Idle Shutdown Cold Ambient A	
		N21620 C189 60....Idle Shutdown Intermediate A	
		N21630 C190 80....Idle Shutdown Hot Ambient Ai	
		N21550 C206 35....Idle Shutdown Percent Engine	
		N21340 C209 120...Maximum Vehicle Speed	
		N21510 C225 NO....Idle Shutdown with Parking B	
		N21450 C231 NO....Gear Down Protection	
		N21570 C233 NO....Idle Shutdown Manual Overrid	
		N21440 C234 NO....Engine Protection Shutdown	
		N21480 C238 NO....Cruise Control and Engine Br	
		N21470 C239 NO....Cruise Control Auto-Resume	
		N21430 C333 0.....Driver Initiated OverrideMax	
		N21410 C334 0.....Driver Initiated Override Ma	
		N21590 C382 YES...Idle Shutdown Hot Ambient Au	
		N21500 C395 1259..Green House Gas Automatic En	

Price Level: January 1, 2023

Deal: 389x cummins

Printed On: 3/14/2023 4:01:48 PM

Date: March 14, 2023

Quote Number: QUO-1020050-W7R4L6



Sales Code	Std/ Opt	Description	Weight
		N21530 C396 YES...Idle Shutdown Warning Period	
		N21540 C397 60....Idle Shutdown Warning Period	
		N21320 C399 120...Green House Gas Vehicle Spee	
		N21400 C400 474...Driver Initiated Override Re	
		N21420 C401 10....Green House Gas Vehicle Spee	
		N21330 C402 0.....Green House Gas Vehicle Spee	
2091130	S	VMUX Electronics Architecture	0
2091300	O	Enable Preferred EIST Settings	0
2091305	S	Engine Idle Shutdown Timer Enabled	0
2091315	O	Enable EIST Ambient Temp Overrule	0
2091414		Eff EIST 1259000 Expiration Miles (CAN)	0
2091760		Effective VSL Setting 65.0 MPH or Greater (CAN)	0
2092016	O	Typical Operating Speed 62 MPH	0
2092033	O	Powertrain Optimized for Balance Best analysis for vehicles where service includes frequent start and stop cycles.	0
2120160	O	Cummins TRV For DAVCO Only For Fuel Filter, X15	0
2140200	O	CARB Engine Idling Compliance PACCAR PX-7, PX-9 and MX, Cummins X15 and ISX diesel engines will include the required factory installed serialized sticker on the drivers door to identify them as meeting the NOx idling standard.	0
2140410	S	Engine Brake Controls Located on RH Column	0
2140450	O	Remote PTO/Throttle, 12-Pin Eng Bay Remote Control Provision	0
2140670	O	EPA Emission Warranty	0
2513060	S	PACCAR 160 Amp Alternator, Brushed PACCAR 160 AMP alternator, brushed producing 160 Amps at road speed and 100 Amps at idle.	0
2521090	S	Immersion Type Block Heater 110-120V Standard location for 2.1M and 1.9M models is left-hand under cab, Model 520 is in bumper, and for Model 220 it is at the driver step. Plug includes a weather-proof cover that protects the receptacle. This pre-heater keeps the coolant in the engine block from freezing when the engine is not running.	0
2521110	O	Oil Pan Heater 120V/300W Oil Pan Heater 120V/300W operates via 120V ShorePower system and keeps oil warm and free flowing for instant lubrication with oil and transmission immersion heaters when the engine is not running. This	2

Price Level: January 1, 2023

Deal: 389x cummins

Printed On: 3/14/2023 4:01:48 PM

Date: March 14, 2023

Quote Number: QUO-1020050-W7R4L6



Sales Code	Std/ Opt	Description	Weight
		option utilizes the same receptacle as the immersion pre-heater if specified together.	
2522090	O	PACCAR Premium Starter - X15 Engines Only PACCAR Premium 12 volt. Better cranking power, lower current draw and improved warranty to 5-yr/500K miles.	0
2538050	O	4 PACCAR Premium 12V Dual Purpose Batt 2920 CCA Threaded stud type terminal. Stranded copper battery cables are double aught (00) or larger to reduce resistance.	62
2539420	O	Batteries In LH Box U/Cab	0
2539740	O	Kissling Battery Disconnect Switch 300AMP Dual Tab Mounted on Battery Box	3
2621090	S	DM Advantage ON/OFF Fan Clutch Horton DM Advantage Two-Speed Fan Clutch On/Off for heavy-duty, medium-duty and a variety of off-highway equipment.	0
2723220	O	18.7 CFM Naturally Aspirated Air Compressor X15 Only	0
2812170	O	Intebrate (Furnished on Engine) Features a dedicated cam lobe design for optimum power and three-stage engine brake operation.	0
2921130	O	DAVCO 382 Fuel/Water Separator The Fuel Pro 382 is a combination of diesel fuel filtration and water separator that is recommended for heavy-duty diesel engines with flow rates up to 180 gallon/hour.	0
2921320	O	12V Heat for Fuel Filter Fuel filter heaters help ensure a seamless flow of diesel from the tank to the combustion chamber. Eliminating any possibility of moisture freezing within the fuel filter while simultaneously increasing the fuel temperature for atomization within the engine.	0
3010170	O	Ignition Idle Timer	0
3010400	O	Engine Protection Shutdown w/ Label Includes oil pressure, oil temperature, coolant temperature, and intake manifold temperature.	0
3114270	S	High Efficiency Cooling System Cooling module is a combination of steel and aluminum components, with aluminum connections to maximize performance and cooling capability. Silicone radiator & heater hoses enhance value, durability, & reliability. Constant tension band clamps reduce leaks. Chevron Delo Extended Life Coolant (NOAT) extends maintenance intervals reducing maintenance costs. Anti-freeze effective to -30 degrees F helps protect the engine. Low coolant level sensor warns of low coolant condition to prevent engine damage. Radiator Size by Model: 367 1325 sq in, 367 HH Fepto 1325 sq in, 365 Fepto 1183 sq in, 365 Full Frame Extension 1000 sq in, 520 1202 sq in, 579 1456.9 sq in, 535/536/537/548 949.3 sq in, 537/548 VOC 1000.3 sq in, 389/367 HH 1604 sq in, 365/567 1379 sq in.	0
3211040	O	(2) 15" Premium SS Air Cleaners, Cowl Mtd SS Cap	68
3365320	O	Exhaust Dual Side of Cab	146

Price Level: January 1, 2023

Deal: 389x cummins

Printed On: 3/14/2023 4:01:48 PM

Date: March 14, 2023

Quote Number: QUO-1020050-W7R4L6



Sales Code	Std/ Opt	Description	Weight
		DPF/SCR right-hand under cab.	
3382170	O	389X Custom Exhaust Package Includes 7" Diameter in Place of 5", Curved Tips	0
3383040	O	DPF Regeneration Switch Remove Stop Position	0
3387370	O	60" Ht, 5" Dia Chrome, Clear Coat Standpipe(s)	13

Transmission & Equipment

4022200	O	Eaton RTLO18918B 18-Speed Includes oil-to-water cooler, rear transmission support, direct shift pattern. Synthetic lubricant to reduce friction, improve efficiency, & extend component life. Magnetic transmission oil drain plug captures & holds any metal fragments in transmission oil to extend service life. Torque limiting clutch brake. Forward ratios: LL-14.4, L-12.29, 1st-8.51, 2nd-7.26, 14th-1.00, 15th-0.86, 16th-.073. Reverse ratios: R1-15.06, R2-12.85, R3-4.03, R4-3.43	120
4210870	S	RPL20 Driveline Interaxle Requires RPL20 Driveline interaxle (option 4210870) for tandem rear axles. RPL20 series drivelines are built for heavy-duty commercial vehicles and are permanently lubricated and sealed for life with triple lip seals to protect against contaminants. All Meritor drivelines will be primed before painted, improving paint adhesion for longer lasting quality in the field.	0
4211360	O	RPL25 SD Driveline, 1 Midship Bearing All Meritor drivelines will be primed before painted, improving paint adhesion for longer lasting quality in the field.	120
4233900	O	(1) Dash Mounted Single Acting EOA PTO Control Electric-over-air (EOA), spec'ing PTO (power-take-off) control switch does not ensure the PTO will fit.	1
4250790	O	Aluminum Transmission Bell Housing IPO Iron Eaton transmission 1450 torque and above	-52
4250800	O	Manual Shifter, Chrome	0
4256250	O	Heavy Duty Input Bearing for PTO Operation For use with Fuller RTLO transmission 1100 through 2250 series. The roller style input shaft bearing has twice the dynamic radial load capability of the ball bearing style and is recommended for transmissions that will be equipped with a transmission mounted 6 or 8 bolt PTO.	0
4380220	O	Pre-Damped Clutch Pre-damped feature consists of a set of small springs around the hub, which dampen the engine torsional vibrations at idle speeds before they can reach the transmission and cause gear rattle. Option required on configurations specifying an ISX15 Family 1 engine and a manual transmission with torque ratings of 1650 lb-ft torque or higher.	0
4380270	O	Remote Lube Hoses For Clutch Linkage, Release Bearing and cross shafts, mounted to left-hand frame rail	6
4380360	O	Upgrade Clutch Torque Capacity Requires 1,550 or greater engine torque.	0

Price Level: January 1, 2023

Deal: 389x cummins

Printed On: 3/14/2023 4:01:48 PM

Date: March 14, 2023

Quote Number: QUO-1020050-W7R4L6



Sales Code	Std/ Opt	Description	Weight
Air & Trailer Equipment			
4510190	S	Bendix AD-HF Air Dryer, Heater Bendix AD-HF air filters protects the life of your engine system and components. Proven PuraGuard oil coalescing technology in the the air dryer cartridge. This oil coalescing filter ensures the removal of oil and oil aerosols before they can contaminate the moisture removing desiccant.	0
4520420	O	Pull Cords All Air Tanks	1
4540420	S	Nylon Chassis Hose	0
4543330	O	Polished Aluminum Air Tanks Outside Frame Rails Exposed air tanks outside the frame rails will be polished aluminum. Air tanks mounted inside the frame rails or covered by other components will be either painted aluminum (4543340) or painted steel (4543320) air tanks depending on air tank option selected.	0
4543340	O	Aluminum Painted Air Tanks All air tanks are aluminum with painted finish except when Code 4543330 Polish Aluminum Air Tanks is also selected (then exposed air tanks outside the frame rails will be polished aluminum). Peterbilt will determine the optimal size and location of required air tanks. Narratives requesting a specific air tank size or location will not be accepted for factory installation. See ECAT to determine number or location of air tanks installed.	-45
4543390	O	High Mount Air Tanks BOC/BOS Where Possible Subject to frame review	0
4610920	S	Self-Returning Brake Hand Valve Dash mounted controls	0
4611120	O	Cast 7-Way Plug(s) IPO Std Plastic 7-Way Plug(s)	0
4614000	O	AE Connections BOC/BOS, Without Hose Tenna	-8
4614850	O	12' AE Lines Straight, (2) 7-Way Plugs	8
Tires & Wheels			
5056840	O	FF: MN 16ply 11R22.5 X Line Energy Z Efficiency Rating: Fair The MICHELIN X LINE ENERGY Z tire is a line haul steer tire built for high miles and better rolling resistance. Diameter= 41.3 inches; SLR= 19.3 inches	8
5156580	O	RR: MN 16ply 11R22.5 X Works D	240
5190008	S	Code-rear Tire Qty 08	0
5220600	O	FF: Peterbilt 88U677 22.5X8.25 High Polish Aluminum, Ultra ONE technology.	-46

Price Level: January 1, 2023

Deal: 389x cummins

Printed On: 3/14/2023 4:01:48 PM

Date: March 14, 2023

Quote Number: QUO-1020050-W7R4L6



Sales Code	Std/ Opt	Description	Weight
5320720	O	RR: Alcoa ULT397 22.5X8.25 High Polish Aluminum. Built for heavy-duty applications and are light weight. Available with polished and Dura-Bright finishes.	-224
5390008	S	Code-rear Rim Qty 08	0
5407640	O	FF: Mirror Polish Wheels, Outer Surface Single/tandem steer. Mirror Polish outer surface of outer wheel. Without chrome wheel nuts.	0
5407660	O	RR: Mirror Polish Wheels, Outer Surface, Tandem Drive Mirror polish outer surface of outer wheels (4). Without chrome wheel nuts.	0
5410140	O	FF: Dura-Bright Finish Outer Surface of Outer Wheel, requires Polished Option	0
5410160	O	RR: Dura-Bright Finish-Tandem Axle Outer Surface of Outer Wheel, requires Polished Option	0

Fuel Tanks

5552250	O	26" Aluminum 120 Gallon Fuel Tank RH BOC Paddle handle filler cap with threadless filler neck. Top draw fuel plumbing reduces chance of introducing air into the fuel system during low fuel level conditions due to the central placement of fuel pickup tube. Wire braid fuel lines increase durability & reduce potential for leaks.	24
5556400	O	26" Aluminum 150 Gallon Fuel Tank LH BOC Paddle handle filler cap with threadless filler neck. Top draw fuel plumbing reduces chance of introducing air into the fuel system during low fuel level conditions due to the central placement of fuel pickup tube. Wire braid fuel lines increase durability & reduce potential for leaks.	42
5603120	O	Location RH BOC 120 Gallon	0
5604150	O	Location LH BOC 150 Gallon	0
5650140	O	Fuel Tank Rear Fill Not available on under cab fuel tanks	0
5650270	O	Split Aluminum Fuel Tank LH BOC	4
5650710	O	Locate BOC Fuel Tanks Forward As Far As Possible May result in filler neck under sleeper	0
5650820	O	Polish (2) Aluminum Fuel Tanks	0
5651520	O	(4) Straps Per Tank, (1) Tank Subject to frame review	40
5652570	O	(2) Shut-Off Valves On Fuel Supply Lines Dual draw/return	0
5652600	O	Fuel Rear In Split Tank	0
5652700	O	90 Gallon Fuel In Split Tank	0

Price Level: January 1, 2023

Deal: 389x cummins

Printed On: 3/14/2023 4:01:48 PM

Date: March 14, 2023

Quote Number: QUO-1020050-W7R4L6



Sales Code	Std/ Opt	Description	Weight
5652800	O	Additional Sending Unit In Secondary Fuel Tank Allows driver to read the fuel level of each of the fuel tanks independently using a single dash mounted fuel gauge	2
5652830	O	Polish All Fuel / Hydraulic Tank Straps Does not apply to rectangular DEF tank straps	0
5652880	O	DEF Tank Mounted RH BOC You have selected a Diesel Exhaust Fluid (DEF) tank mounted on the right-hand (passenger) side of the vehicle. Note, some retail fuel distributors have chosen to standardize on DEF dispensing pumps oriented to the left-hand (driver) side of the vehicle. Please verify your selection for DEF tank mounting.	0
5652980	S	DEF To Fuel Ratio Between 1:1 And 2:1	0
5653000	O	Polished Stainless Steel Cover For DEF Tank	0
5653220	O	Symmetrical BOC Fuel Tank Location, Rear Edge If the complexity of the configuration does not allow the fuel tanks to be mounted symmetrically, the dealer will be contacted to possibly remove the option and replace it with the vehicle layout option.	0
5655029	O	DEF Tank Medium, 24 Gal	22
Battery Box & Bumper			
6010030	S	Aluminum Battery Box LH Under Cab, Non-Slip Step Includes diamond pattern block shaped cover in traditional/vocational models and a smooth finish tapered cover on aerodynamic models	0
6030300	O	Severe Service Battery Hold Down Rubber pad in bottom of battery box	2
6030540	O	Polish Battery/Tool Box(s), Aftertreatment Cab Entry complete	0
6034620	O	Heavy Duty Battery Box Step Reinforcement	2
6040550	S	Aftertreatment Aluminum Non-Slip Cab Entry Aftertreatment right-hand under cab step. DPF/SCR for diesel engines, catalyst for natural gas engines. On Models 579 specifying chassis fairings, the box is aerodynamic.	0
6122910	O	Steel Texas Style Bumper Chromed Steel Texas styled bumper chromed with two tow points.	-55
Cab & Equipment			
6510130	O	Alum Cab 131in BBC Alum Hood SFFA fenders w/polished crown, spring tilt assist. Proprietary anti-blow-down locking mechanism that keeps hood open during servicing & prevents unintentional closing. Hood latch each side secures hood to cowl. Proprietary all-alum cab is light weight & durable for long service life. One-piece roof reduces potential for leaks. Two-piece windshield for cost effective windshield replacement. Lap seam construction & aircraft fasteners has greater clamp load than rivets. Bulkhead style doors provide virtually water-tight, rattle-free performance. Extruded alum door frames for strength & durability. Full length, heavy-duty piano-type	90

Price Level: January 1, 2023

Deal: 389x cummins

Printed On: 3/14/2023 4:01:48 PM

Date: March 14, 2023

Quote Number: QUO-1020050-W7R4L6



Sales Code	Std/ Opt	Description	Weight
		stainless steel door hinges & pins provide durability. View window in RH door for safety. Electric windshield wipers & washers w/intermittent wiper function. Grab handles mtd on cab LH & RH for cab access. Convex mirror over RH door & below each rear view mirror for improved visibility & safety.	
6540120	O	Severe Service Cab Package #1 Includes Aluminum side skins, aluminum rear skin, steel windshield mask, steel firewall, and steel front floor sheet on all cabs, and additional reinforcement structure on the back wall of the day cab.	48
6540660	O	SmartSound Cab Insulation Package Cab acoustic insulation package for day cabs. Includes insulated inside firewall, top side floor damping, absorber treated kick panels, and insulated backwall and roof structure.	65
6540740	O	Peterbilt Keyless Entry The Peterbilt key fob functions to lock or unlock the vehicle. With a single click, the drivers door is locked or unlocked and with a double click all doors are locked or unlocked. The third button, depicted by a picture of a lamp, will start the exterior light self-test sequence, helpful when performing the daily pre-trip inspection.	2
6701840	O	72" Low Roof Sleeper w/Platinum Interior Includes single LH full-length door, storage tray, door actuated baggage compartment light, rubber floor mats in baggage compartment, sleeper curtain, bunk restraint, wide walk-through opening with upholstered cover, cab/sleeper air suspension, tilt-up bunk, 35.5 in x 78 in premium mattress, floor carpet, LH/RH full-length closets with overhead storage, (2) side storage bins, (4) overhead dome lights in headliner, (3) local reading/spot lights, fluorescent light, (2) two-way vents, wood grain accents, closet doors, premium under bunk trim, heater/air conditioner with air filter and controls in sleeper, cigar lighter and ashtray, digital alarm clock, TV shelf with antenna, tiedown straps and wiring, and (2) 12V DC power outlets.	1,270
6810290	O	Sleeper Door Diaphragm (Curtain)	2
6810730	O	RH Sleeper Baggage Door Includes door-actuated baggage compartment light. Available on 44"/58"/72"/80" sleepers.	10
6812590	O	Polished Stainless Steel Sleeper Vents In place of painted vent.	0
6814260	O	Thermal Insulation Pkg for the 58" UltraCab Thermal Insulation package for the 58" high roof and the 72" and 80" low roof. Models 579 and 567 include thick closed-cell foam in the floor carpet and fiber insulation in the walls and roof structure. Models 389, 386, 384, 367 and 365 include thick closed-cell foam in the floor and special mylar-faced foam in the walls and roof structure.	4
6911690	O	Sears Premium Driver Seat Increased comfort with more foam in critical areas, better lumbar support, improved adjustability and suspension with toggle link design.	0
6921690	O	Sears Premium Passenger Seat Increased comfort with more foam in critical areas, better lumbar support, improved adjustability and suspension with toggle link design.	0

Price Level: January 1, 2023

Deal: 389x cummins

Printed On: 3/14/2023 4:01:48 PM

Date: March 14, 2023

Quote Number: QUO-1020050-W7R4L6



Sales Code	Std/ Opt	Description	Weight
6930060	O	Driver Seat Heated Includes heating elements in the lower cushion and backrest. Temperature is preset for optimum comfort and controlled by a high/low switch and an on/off switch next to the adjustment valves on the seat.	4
6930590	O	Passenger Armrest - LH only Required with Evolution LX seats, optional with Evolution ST Seats.	2
6930800	O	Black Seat Color IPO Standard Color	0
6939350	O	Fold-Away Arm Rest RH Only - Driver Seat Requires Sleeper and High Back Seat.	2
6939400	S	Air Ride Driver	0
6939420	S	High Back Driver	0
6939450	O	Leather Driver	0
6939500	O	Air Ride Passenger	43
6939520	S	High Back Passenger	0
6939550	O	Leather Passenger	0
7001630	O	Premium Steering Wheel with Multi Function Premium Multi-functional Leather Wrapped Steering Wheel with Peterbilt logo over horn button. Includes audio volume, seek, mute and mode button on LH pod with cruise control on/off/cancel, set/resume and accelerate/coast on the right pod.	5
7039260	O	Platinum Interior - Arctic Gray Includes striking charcoal A & B instrument panels and high-gloss burlwood C & D instrument panels, monochromatic color-coordinated dash w/glare-resistant, charcoal soft-touch upper, bright bezel on gauges, high-gloss burlwood insert on contoured doorpads w/vinyl inserts, LH/RH door mounted map pockets w/built-in courtesy lights, power windows & door locks on both doors, adjustable steering column w/18 inch soft-touch steering wheel, soft-touch steering column cover, floor carpet, padded premium vinyl headliner w/insert, (2) inside sunvisors (integral vanity mirrors), (2) coat hooks, (2) dome/reading lights, footwell lighting, integrated "dead pedal", (5) inside entry grab handles, cupholder & map bin in dash and 12V power outlet dash mounted.	33
7040310	O	Black Floor Carpet IPO Interior Color	0
7230350	O	2-Piece Flat Windshield	0
7310260	O	D2 Fuel Fired Sleeper Heater W/Digital Controller Digital display shows ambient temperature and temperature settings, diagnostic read-out shows fault codes and ventilation mode which allows fan to be on without heater. Offers 4 heat levels, compact size, CARB compliant, runs approximately 15-20 hours per gallon of diesel fuel.	12

Price Level: January 1, 2023

Deal: 389x cummins

Printed On: 3/14/2023 4:01:48 PM

Date: March 14, 2023

Quote Number: QUO-1020050-W7R4L6



Sales Code	Std/ Opt	Description	Weight
7322010	S	Combo Fresh Air Heater/Air Conditioner With radiator mounted condenser, dedicated side window defrosters, Bi-Level Heater/Defroster Controls, 54,500 BTU/HR, and silicone heater hoses.	0
7330160	O	Arctic Wrap on Sleeper Heater Water Supply Lines (Requires sleeper heater on conventionals)	0
7330700	S	Peterbilt Comfort Control - Cab	0
7330710	O	Peterbilt Comfort Control - Sleeper Includes a temperature sensor.	2
7330770	O	Air Conditioning Excise Tax - Canada	0
7410040	O	Outside Sunvisor - Stainless Steel Not available with 2.1M high roof sleeper.	4
7521030	O	Moto Mirror Traditional, Heated and Motorized Motorized head movement delivers better range and visibility than mirrors with glass movement alone with a rugged and durable construction that lasts. Film heater which provides superior heat distribution and durability.	2
7560860	O	(2) Convex 8 Inch Heated SSTL Mirrors Offset mounted under mirror brackets	0
7630240	O	Air Horn Valve, Pull Cord and Plumbing to firewall bulkhead.	-4
7721050	O	Satellite Radio Requires USB port and bluetooth for phone and audio.	0
7722120	O	ConcertClass, AM/FM, Weatherband, 3.5 Aux	10
7725740	O	Midlevel Speaker Package For Cab (4) Speakers	6
7725780	O	Midlevel Speaker Package For Sleeper (2) Speakers w/Subwoofer	34
7728040	O	Bluetooth Phone and Audio Requires USB Port	0
7728050	O	USB Port	0
7740100	O	Cobra 40 Channel CB Radio w/Integral Speaker Includes illuminated front panel	11
7749110	O	Mount CB Speaker LH Rear Corner Cab Headliner	2
7788055	S	SmartLINQ Remote Diagnostics SmartLINQ is Peterbilts proprietary remote diagnostics service which monitors the engine and aftertreatment for diagnostic codes providing real-time code analysis maximizing vehicle uptime and strengthening the fleets partnership with their dealer. SmartLINQ provides fault coverage for over 800 codes, a customizable email notification for 116 codes plus a web portal to manage your entire fleet included at no additional charge. SmartLINQ is compatible with any telematics system and doesnt require a specific fleet management system. For those whose customers utilize PeopleNet, the pre-wire with remote	0

Price Level: January 1, 2023

Deal: 389x cummins

Printed On: 3/14/2023 4:01:48 PM

Date: March 14, 2023

Quote Number: QUO-1020050-W7R4L6



Sales Code	Std/ Opt	Description	Weight
		diagnostics will provide a more integrated solution utilizing the existing SmartLINQ modem. For those whose customers utilize other fleet services products, the existing pre-wire option for the other fleet service devices will continue to be available. Standard on Class 8 engines and available on Models 348, 337, 330 and 325 with a PX-9, PX-7 or Cummins Westport natural gas engine.	
7788058	O	24 Months SmartLINQ Subscription Cummins Engines.	0
7788260	O	Radio Antenna Mounted on RH Mirror Bracket	0
7788840	O	VHF Radio Wiring Mounted in Header with VHF Radio Antenna mounted LH mirror bracket.	2
7850210	O	Plug-In Auto Reset Circuit Breaker in place of fuses in junction box.	0
7851040	O	Removable Bugscreen Behind Grille	2
7851190	O	Dual Door Stops - Driver and Passenger	2
7851480	S	Peterbilt Electric Windshield Wipers With Intermittent Feature.	0
7855190	O	1800 Watt Inverter, Battery Charger and Shore Power.	10
7900040	O	Fire Extinguisher, Ship Loose Hazmat approved UL listed/rated ABC.	7
7900090	O	Triangle Reflector Kit, Ship Loose Florescent triangle emergency road flares are designed to meet and exceed all DOT standards.	13
8011100	O	Main Transmission Temperature Gauge 52mm Round, backlit. If this option is selected on a truck with VMUX electrical architecture, the gauge will be included in the digital display.	0
8011410	O	Drive Axle #1 Front Oil Temperature Gauge 52mm round, backlit. Physical gauges must be ordered in pairs and are limited to a total of 6. If this option is selected on a truck with VMUX electrical architecture, the gauge will be included in the digital display.	0
8011420	O	Drive Axle #2 Rear Oil Temperature Gauge 52mm round, backlit. Physical gauges must be ordered in pairs and are limited to a total of 6. If this option is selected on a truck with VMUX electrical architecture, the gauge will be included in the digital display.	0
8011470	O	Engine Oil Temperature Gauge 52mm round, backlit. These physical gauges must be ordered in pairs and are limited to a total of 6. If this option is selected on a truck with VMUX electrical architecture, the gauge will be included in the digital display.	0
8012240	O	Guard(s) For Rear Axle Heat Gauge	2
8021050	O	Air Restriction Pressure Gauge 52mm Round, backlit. If this option is selected on a truck with VMUX electrical architecture, the gauge will be included in the digital display.	0
8021370	O	(2) General Air Pressure Gauges Plumbed To Firewall bulkhead	2

Price Level: January 1, 2023

Deal: 389x cummins

Printed On: 3/14/2023 4:01:48 PM

Date: March 14, 2023

Quote Number: QUO-1020050-W7R4L6



Sales Code	Std/ Opt	Description	Weight
8021380	S	Air Restriction Indicator Mounted on air cleaner, intake piping, or firewall	0
8021530	O	Air Suspension Pressure 1 Gauge 52mm round, backlit. Physical gauges must be ordered in pairs and are limited to a total of 6.	0
8021830	O	Increased Air Filter Full Indication For air filter restriction gauge	0
8022160	O	Fuel Filter Restriction Gauge 52mm Round, backlit. Physical gauges must be ordered in pairs and are limited to a total of 6. If this option is selected on a truck with VMUX electrical architecture, the gauge will be included in the digital display.	0
8022810	O	Secondary Fuel Level Gauge Located in Digital Cluster Display	0
8041170	O	Speedometer KPH IPO MPH	0
8041210	U	Dual Scale Speedometer KPH Over MPH	0
8070000	O	Disable Brake Light With Engine Brake	0
8070090	O	(3) Additional Dash Switches with Wiring Located on dash panel C. Availability subject to dash space. Includes 4" 14 gauge wire with butt splice at rear of each additional switch.	2
8070200	O	Tractor Brake Application Gauge 52mm Round, backlit. Physical gauges must be ordered in pairs and are limited to a total of 6. If this option is selected on a truck with VMUX electrical architecture, the gauge will be included in the digital display.	0
8070260	O	Switch To Deactivate ATC Traction Control Bendix ATC is required on the specification. Switch is to temporarily disable the Traction Control in extreme conditions such as snow, ice or mud. The ATC warning light will display in a constant state.	0
8070410	O	Standard Metric Gauges	0
8070450	O	Engine PTO Hourmeter Gauge Located In Digital Cluster Display	0
8070820	S	Engine Percent Torque Located in Digital Cluster Display	0
8070830	O	Main Instrumentation Panel Digital Cluster 15" Display includes: Speedometer, Tachometer, Primary Air Pressure, Secondary Air Pressure, Fuel Level, DEF Level, DPF Filter Status, Fuel Economy, Oil Pressure, Coolant Temp, and Voltmeter.	0
8071310	O	Ammeter 52mm Round, backlit. If this option is selected on a truck with VMUX electrical architecture, the gauge will be included in the digital display.	0
8071900	O	Manifold Pressure Gauge 52mm Round, backlit. Physical gauges must be ordered in pairs and are limited to a total of 6. If this option is selected on a truck with VMUX electrical architecture, the gauge will be included in the digital display.	0
8073050	O	(2) Additional Electric Over Air Switches	0

Price Level: January 1, 2023

Deal: 389x cummins

Printed On: 3/14/2023 4:01:48 PM

Date: March 14, 2023

Quote Number: QUO-1020050-W7R4L6



Sales Code	Std/ Opt	Description	Weight
		On/off only, switch has green indicator light, air connections on frame rail under cab. Two accessory solenoid banks with plugs.	
8111140	S	Headlights Projector Module Pod Integral Turn Signals	0
8121170	O	(5) Marker Lights, Bus LED Bullet	0
8133120	O	Switch & Wiring F/O Aux Light On Air Cleaners Includes switch on the dash which will power metri-pack sealed connections at the left-hand / right-hand air cleaner outlets	2
8133125	O	Switch & Wiring For Aux Light On Dual Air Cleaners / Rocker Panels	4
8133470	O	Switch & Wiring for F/O Beacon/Strobe Switch and wiring for furnished by owner beacon / strobe, 10' coiled wire back-of-cab / back-of-sleeper, at rear sill.	2
8133500	O	Switch On Dash For Light In Sleeper In addition to standard switch	2
8133960	O	Daytime Running Lights The brake interlock turns the daytime running lights off when the parking brakes are engaged. This is required on all Canadian vehicles.	0
8134160	O	Self-Canceling Turn Signal	0
8140060	O	LED Oval Stop/Turn/Tail/Backup In tractor taper end of frame crossmember	-7
8141010	O	Wiring for Additional Set Turn Signals Wiring for additional set turn signals, mounted under corners of cab or sleeper.	5
8151130	O	(2) Load Lights, Flush Mounted Low Inboard Loc A	4
8151140	O	(2) Load Lights, Flush Mounted Low Outboard Loc B	4
8151150	O	(2) Load Lights, Flush Mounted Mid Location C Sleeper only	4
8152560	O	(2) Load Lights, Bracket Mounted Outboard Loc J Canadian style (requires Canadian Registry with all sleepers). Load light Location J not available with DayCab, 2007 engine, and side of cab exhaust combination.	6
8153100	O	(1) F/O Load Light, Switch, 10' Wire Coil Under / in cab / sleeper baggage compartment	2
Paint			
8530780	O	(1) Color Axalta Two Stage - Cab/Hood/Sleeper Base Coat/Clear Coat N85020 A - 902382EY LEGENDARY GRAY EFFECT N85500 CAB ROOF 902382EY LEGENDARY GRAY EFFECT N85300 FENDER 902382EY LEGENDARY GRAY EFFECT N85200 FRAME L0001EA BLACK N85400 HOOD TOP 902382EY LEGENDARY GRAY EFFECT N85720 SK FAIRINGS 902382EY LEGENDARY GRAY EFFECT N85600 SLEEPER ROOF 902382EY LEGENDARY GRAY EFFECT	0

Price Level: January 1, 2023

Deal: 389x cummins

Printed On: 3/14/2023 4:01:48 PM

Date: March 14, 2023

Quote Number: QUO-1020050-W7R4L6



Sales Code	Std/ Opt	Description	Weight
8531350	O	Axalta Two Stage Effect - Glass Cab/Hood & Sleeper Only	0

Shipping Destination

Options Not Subject To Discount

9400090	S	Peterbilt Class 8 Standard Coverage 1 year/100,000 Miles (160,000 km)	0
9407147	O	Fuel Price Index Factor \$438 NET	0
9408703	O	Base Warr: Emissions 5YR/100K MI-EPA Engine	0
9408982	O	Vehicle Layout Option is not subject to discount. Fleets will be split prior to build so that the charge is applied to only one unit. Quotes will not reflect this.	0

Miscellaneous

9409011	O	72in Sleeper / Platinum Interior (6P)	0
9409048	O	State Registry: Canada	0

Promotions

Order Comments



Total Weight

18,631

Prices and Specifications Subject to Change Without Notice.

Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in CRM.

PRICING DISCLAIMER

While we make every effort to maintain the web site to preserve pricing accuracy, prices are subject to change without notice. Although the information in this price list is presented in good faith and believed to be correct at the time of printing, we make no representations or warranties as to the completeness or accuracy of this information. We reserve the right to change, delete or otherwise modify the pricing information which is represented herein without any prior notice. We carefully check pricing specifications, but occasionally errors can occur, therefore we reserve the right to change such prices without notice. We disclaim all liability for any errors or omissions in the materials. In no event will we be responsible for any damages of any nature whatsoever from the reliance upon information from these materials. Please check your order prebills to confirm your pricing information



Shipping Destinations

Intermediate Destination: NONE

Final Destinations	Quantity
--------------------	----------

FIFTH WHEEL HEIGHT



Component	Sales Code	Description	Laden	Unladen
Rearmost Fifth Wheel	0835960	Holland FW33 Fifth Wheel Top Plate	9.3	9.3
Frame	0514000	10-3/4" Steel Rails To 354"	10.8	10.8
Suspension	1821990	Peterbilt Low Low Air Leaf 40,000 lb, 52in Axle	6.5	6.8
Tire	5156580	RR: MN 16ply 11R22.5 X Works D	19.8	20.8
Total Height			46.30	47.50

FRAME RAKE




The listed heights should be considered approximations due to variations which may occur in component manufacturing processes, spring set, and the way in which the vehicle is loaded.

Component	Sales Code	Description	Laden	Unladen
Frame	0514000	10-3/4" Steel Rails To 354"	10.8	10.8
Front Spring	1111100	Peterbilt Front Air Leaf, Shocks 13,200 lb	9.3	9.3
Front Axle Drop 3.5""	1011840	Dana Spicer E1322IL 13,200 lb, 3.5 in. Drop	-1.5	-1.5
Height Adj.		Omit - Front Air Leaf Only	0.0	0.0
Front Tires	5056840	FF: MN 16ply 11R22.5 X Line Energy Z	19.1	19.6
Front Frame Height			37.7	38.2
Frame	0514000	10-3/4" Steel Rails To 354"	10.8	10.8
Subframe				
Suspension	1821990	Peterbilt Low Low Air Leaf 40,000 lb, 52in Axle	6.5	6.8
Rear Tires	5156580	RR: MN 16ply 11R22.5 X Works D	19.8	20.8
Rear Frame Height			37.1	38.3
Frame Rake			-0.6	0.1
Frame Rake Slope (%)			-0.2	0.0


*These characteristics are considered to be out of standard range:
Laden rake more than 1% of wheelbase from level (positive or negative).*

HORIZONTAL DIMENSIONS

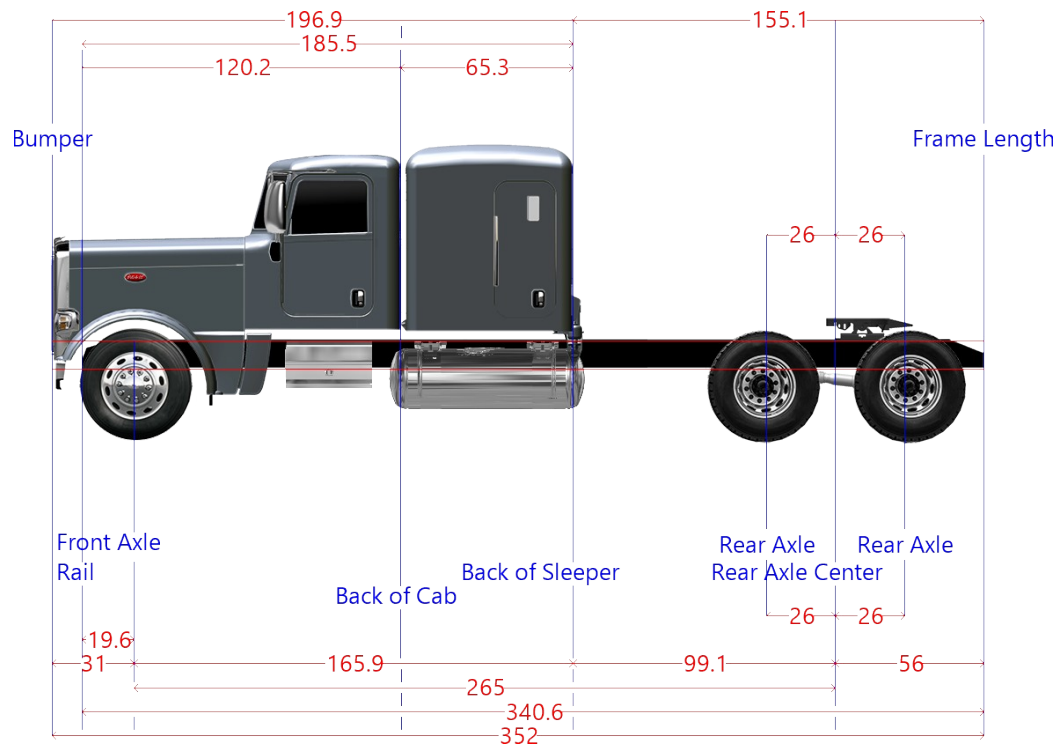

Dimension	Measurement	Start	End
Axle Spacing	52	239	291
Bumper to Back of Cab	196.9	-31	165.9
Bumper to Front Axle	31	-31	0
Bumper to Front Frame	11.4	-31	-19.6
Cab to End of Frame	220.4	100.6	321
Cab to Rear Axle	164.4	100.6	265
Effective Bumper to Back Of Cab	262.2	-31	231.2
Frame Length	340.6	-19.6	321
Front Axle to Back of Cab	100.6	0	100.6
Front of Frame to Axle	19.6	-19.6	0
Load Space	220.4	165.9	321
Overall Length	352	-31	321
Overhang	56	265	321
Pusher Offset #1	0	239	265
Pusher Offset #2	0	239	265
Pusher Offset #3	0	239	265
Tag Offset	0	265	291
Wheelbase	265	0	265

FRAME LAYOUT

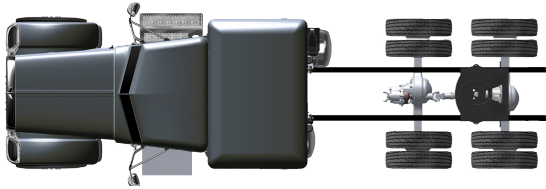

Note: The image displayed is representative only. It should not be construed as a layout diagram. Dimensions and components are not to scale.

Selected Options (Wheelbase: 265)

Sales Code	Description	Length	Side
6040550	Aftertreatment Aluminum Non-Slip Cab Entry	45.3	Right
5655029	DEF Tank Medium, 24 Gal	16.13	Right
5552250	26" Aluminum 120 Gallon Fuel Tank RH BOC	59.95	Right
5556400	26" Aluminum 150 Gallon Fuel Tank LH BOC	73.95	Left
6010030	Aluminum Battery Box LH Under Cab, Non-Slip Step	33	Left