


5/8" FORGED D-RING RATED AT 6130LBS, 11 PLACES

**STANDARD LAYOUT**

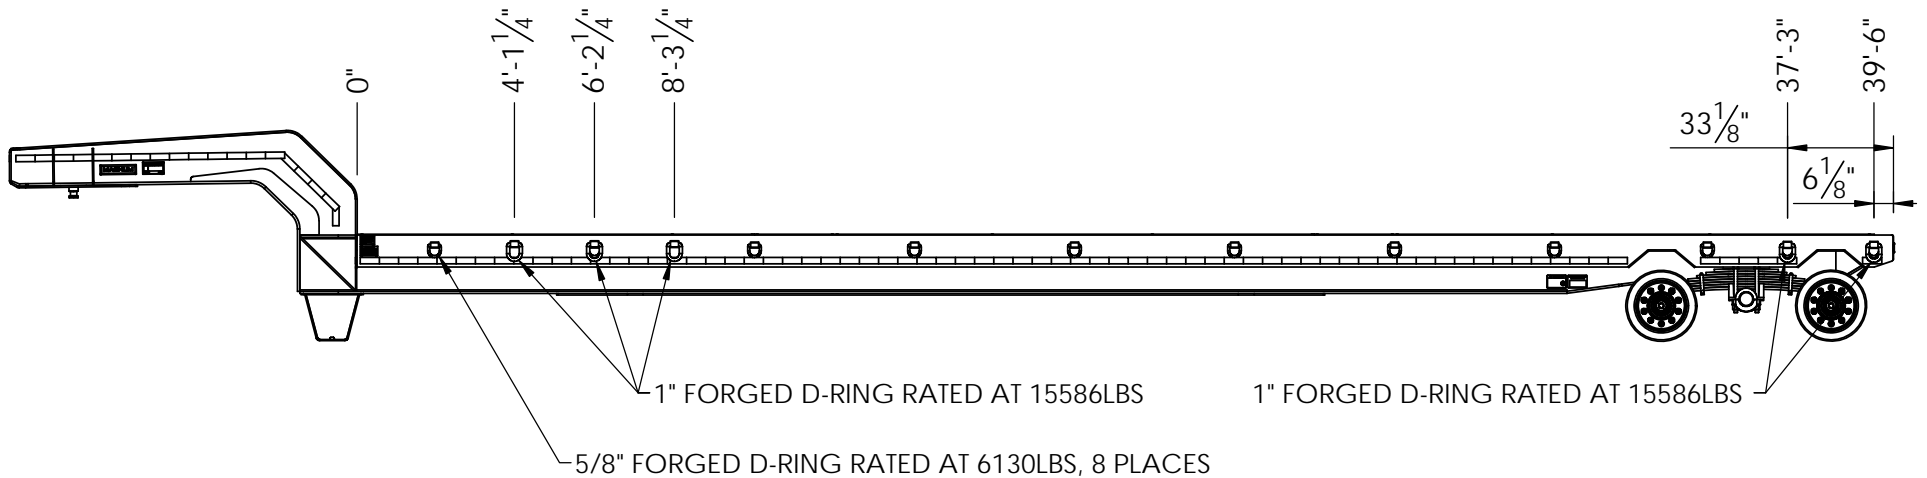

1" FORGED D-RING RATED AT 15586LBS

1" FORGED D-RING RATED AT 15586LBS

5/8" FORGED D-RING RATED AT 6130LBS, 8 PLACES

**OPTIONAL HEAVY DUTY D-RING LAYOUT**

**MAGNUM TRAILER & EQUIPMENT INC.**



**FRACTIONS CHART**

|      |        |       |        |       |        |       |        |
|------|--------|-------|--------|-------|--------|-------|--------|
| 1/32 | .03125 | 9/32  | .28125 | 17/32 | .53125 | 25/32 | .78125 |
| 1/16 | .0625  | 5/16  | .3125  | 9/16  | .5625  | 13/16 | .8125  |
| 3/32 | .09375 | 11/32 | .34375 | 19/32 | .59375 | 27/32 | .84375 |
| 1/8  | .125   | 3/8   | .375   | 5/8   | .625   | 7/8   | .875   |
| 5/32 | .15625 | 13/32 | .40625 | 21/32 | .65625 | 29/32 | .90625 |
| 3/16 | .1875  | 7/16  | .4375  | 11/16 | .6875  | 15/16 | .9375  |
| 7/32 | .21875 | 15/32 | .46875 | 23/32 | .71875 | 31/32 | .96875 |
| 1/4  | .25    | 1/2   | .5     | 3/4   | .75    |       |        |

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:

|           |            |
|-----------|------------|
| FRACTIONS | ANGLES     |
| +/- 1/16" | +/- 1°     |
| .XX"      | .XXX"      |
| +/- 0.03" | +/- 0.005" |

DIMENSIONS TO SHARP POINTS

SHEET NAME

Sheet3

CURRENT CUSTOMER

WO#

SCALE

1:60

TITLE

**LOAD SECUREMENT DETAIL**

STOCK NUMBER

VENDOR NUMBER

WEIGHT - LB.

DRAWN BY

GS

DRAWN DATE

2023-03-20

REV.

MODELLER

DRAWING NUMBER

**AA-62426**

NUMBER OF SHEETS

1