

HARVEST

by MERIDIAN



THE NEW H-XT HIGH EFFICIENCY SWING-AWAY AUGER

NEW **H-XT SERIES**

- Strong
- Streamlined
- Safer
- Easy to service

Model Shown: H1074XT



Heavy Duty HXT-PowerMove



High Efficiency Torpedo Infeed



Fast-Access Flying Port

H-XT SERIES:

HYDRAULIC SCISSOR LIFT & TORPEDO IN-FEED

H10/13XT SERIES - MODEL SHOWN H1374XT

NEW H-XT FEATURES

All new features are standard on all H10XT & H13XT models.

NEW! High stability Truss Support

Eliminates excessive sway during transport & operation

NEW! Quick Flip Hopper Transport Arm

One person to transition arm to either side

NEW! Standard Axle Extensions

Extend each axle an additional 2 feet

CLASSIC FEATURES

- **Double Tapered Bearings**
Designed to handle both radial & axial loads
- **Iron Edge™ Flighting** (up to 50% thicker edge)
5/16" at intake; 3/16" through remainder
- **12 gauge Tubing**
Nearly 2x thicker than 14 gauge
- **Hydraulic Safety Shut-off Valve**
Keeps auger from settling while raised
- **Overflow Protection**
Avoid plugging auger; Can be latched shut

NEW! Optional Light Kit
Safety for road transport

HD H1394-114 Tires
Highway-rated flotation tires



NEW TORPEDO IN-FEED FEATURES

- ① Large discharge hood for easier serviceability.
- ② Dual chain coupler for better service & wear reduction.
- ③ Sealed boot transition to eliminate spillage & maximize capacity while minimizing interior weathering.
- ④ Tapered boot for optimized capacity at steeper angles.
- ⑤ Triple bolted flight connection for superior performance.
- ⑥ Fast-access flighting port: minimal parts removal to directly access & remove all flighting without any additional in-feed dismantling for unparalleled serviceability.
- ⑦ Hitch can be easily removed during service.
- ⑧ Large access doors for better serviceability & clean-out.

MODEL	H1064XT	H1074XT	H1084XT	H1364XT	H1374XT	H1384XT	H1394XT	H13104XT	H13114XT
Length	64'	74'	84'	64'	74'	84'	94'	104'	114'
Max Raised	41'6"	49'7"	54'3"	41'6"	49'7"	54'3"	61'	67'1"	74'4"
Lowered Transport	10'10"	12'	12'3"	11'6"	12'9"	12'11"	14'	14'	15'
HP Required	55 HP	65 HP	75 HP	95 HP	105 HP	125 HP	135 HP	145 HP	150 HP
Capacity	5,700-6,700 bu/hr			8,000-11,000 bu/hr					

* Capacities & HP requirements will vary depending on commodities & other environmental factors. | ** Transport & Discharge Heights are based on a 16" drawbar height.


HARVEST
by MERIDIAN

2902 Expansion Blvd · Storm Lake, IA 50588
Tel: 712.213.5607 · Toll: 800.437.2334 · Fax: 712.732.1028
www.harvestauger.com

MERIDIAN
www.meridianmfg.com

Size

13" Swing Auger

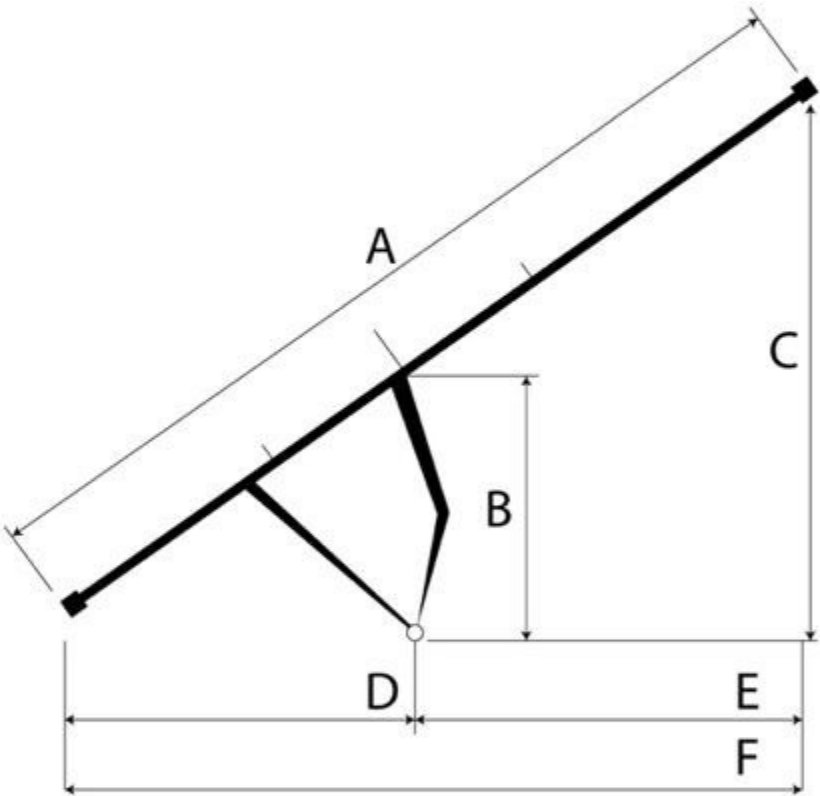

		1375	1385	1395	13115
A	TUBE LENGTH	75'	85'	95'	115'
B	RAISED	24'7"	24' 7"	33'-1"	33'-1"
B	LOWERED	6' 6"	6' 6"	6'-4"	6'-4"
C	RAISED	44' 4"	49' 7"	59'-4"	71'-7"
C	LOWERED	10' 1"	11' 6"	10'-5"	14'-11"
D	RAISED	32'3"	32' 3"	39'-5"	39'-5"
D	LOWERED	40'	40'	49'-11"	49'-11"
E	RAISED	30' 6"	39' 5'''	37'	52'-10"
E	LOWERED	36'	45' 11	45'-8"	65'-6"