

PBS Vehicle Approval

Heavy Vehicle National Law Section 23

Heavy Vehicle (General) National Regulation Section 17

IMPORTANT

- This is a **restricted access vehicle** - you must comply with a Notice or operate under an access permit.
- The driver must carry a copy of this PBS Vehicle Approval and an associated access permit (if applicable).
- The driver must be able to produce readable copies (electronic or hard copy) of this VA and access permit if requested by Authorised Officers.
- All vehicle units in a combination (prime movers, trailers, dollies, etc.) must be listed on this VA.
- The driver must be able to identify the specific combination being driven within the VA.
- Failure to comply with the above can incur penalties for the operator and driver.

9 November 2023

Ref No: PBS – VA15121 – V220322 – v1A

This PBS Vehicle Approval modifies any previously issued approval for the vehicle(s) listed herein operating under Application Number V220322 . The combination(s) listed herein have been transferred from 13928.

Design Approval Holder		Address	
------------------------	--	---------	--

Application Number	V220322	Vehicle	3-axle truck 4-axle dog
Load	Quarry and Bulk; Woodchip; Waste; Unladen; Other	Length (mm)	≤ 19950
Assessor	Andrej Bucko	Height (mm)	≤ 4300

Combination Matrix

For each Truck and Trailer, the corresponding drawing reference number, dimension set number and mass table number/s are listed below. The dimension set number e.g., 'Variant 1A' indicates the maximum allowable payload heights and/or allowable tyre options for the corresponding Truck and Trailer - refer to the Operating Conditions and Approved Tyre Options sections on this VA.

New VINs added in this VA are listed in bold.

Truck 1	Make	GCM (t)
6F5000000NA475994	KW	97

Trailer 1	ATM (t)
6T9T24V86PAAFH031	34

	Trailer 1
Truck 1	11653/54/57/58 Variant 1A Table 1, 2

Table 1
Truck 1 and Trailer 1

Mass Limits	Level 1		Axle Group Masses	Level 1 GML
GML (t)	50.5		Steer (t)	6.5
CML (t)	NA		Drive (t)	16.5
HML (t)	NA		Trailer Front (t)	13.75
Bridge Assessment	Tier 1		Trailer Rear (t)	13.75

Table 2
Truck 1 and Trailer 1

Mass Limits	Level 2	Axle Group Masses	Level 2		
			GML	CML	HML
GML (t)	56.0	Steer (t)	6.5	6.5	6.5
CML (t)	57.5	Drive (t)	16.5	17.0	17.0
HML (t)	57.5	Trailer Front (t)	16.5	17.0	17.0
Bridge Assessment	Tier 1	Trailer Rear (t)	16.5	17.0	17.0

Operating conditions

The NHVR approves the vehicles listed herein for the level(s) shown in the “Mass Limits” table with the following operating conditions:

1. The total combination mass must not exceed the limits in the “Mass Limits” table.
2. The axle group masses must not exceed the limits in the “Axle Group Masses” table.
3. If the “Mass Limits” table specifies Tier 2 or Tier 3, a bridge assessment is required.
4. Maximum payload heights measured from the ground must not exceed: (m)

Variant 1A Level 1 Tyre Set A, B	Truck		Trailer	
	Base of heap	Peak of heap	Base of heap	Peak of heap
	2.150		2.150	
Water level	2.150		2.150	
Heaped 1	2.060	2.230	2.060	2.230
Heaped 2	1.965	2.310	1.960	2.310
Heaped 3	1.845	2.390	1.835	2.390
Heaped 4	1.695	2.470	1.665	2.470
Heaped 5	1.420	2.550	1.410	2.520

Variant 1A Level 2 Tyre Set A, B	Truck		Trailer	
	Base of heap	Peak of heap	Base of heap	Peak of heap
	2.905		2.905	
Water level	2.905		2.905	
Heaped 1	2.820	2.985	2.820	2.985
Heaped 2	2.730	3.065	2.730	3.065
Heaped 3	2.635	3.145	2.635	3.145
Heaped 4	2.530	3.225	2.530	3.225
Heaped 5	2.415	3.305	2.415	3.305

Variant 1A Level 1 Tyre Set C	Truck		Trailer	
	Base of heap	Peak of heap	Base of heap	Peak of heap
	2.700		2.700	
Water level	2.700		2.700	
Heaped 1	2.615	2.780	2.615	2.780
Heaped 2	2.525	2.860	2.525	2.860
Heaped 3	2.425	2.940	2.425	2.940
Heaped 4	2.315	3.020	2.310	3.020
Heaped 5	2.195	3.100	2.185	3.100

Variant 1A Level 2 Tyre Set C	Truck		Trailer	
	Base of heap	Peak of heap	Base of heap	Peak of heap
Water level	3.550		3.190	
Heaped 1	3.265	3.430	3.105	3.270
Heaped 2	3.180	3.510	3.015	3.350
Heaped 3	3.085	3.590	2.925	3.430
Heaped 4	2.990	3.670	2.825	3.510
Heaped 5	2.885	3.750	2.715	3.590

The heaped payload cases describe materials with different angles of repose.

5. 6.5 tonne complying steer axle requirements:
 - an engine that complies with the engine emission standards of Australian Design Rule (ADR) 80/01 (Euro 4) or a later version of ADR 80; and
 - a front underrun protection device (FUPD) that complies with UN ECE Regulation 93 or ADR 84; and
 - a cabin that complies with UN ECE Regulation 29.
6. Concessional Mass Limits (CML) requirements:
 - a National Heavy Vehicle Accreditation Scheme (NHVAS) – Mass Management Accreditation must be in force for all motor vehicles listed on this vehicle approval.
7. Higher Mass Limits (HML) requirements:
 - for tandem axles groups, road friendly suspensions.
8. When operating at Level 1, there is a minimum mass requirement for the drive axle group. The mass on the drive axle group must be at least 26% of the total combination mass e.g. at 50.5t total combination mass, $50.5 \times 0.26 = 13.13\text{t}$ is required on the drive axle group. This clause does not apply to an unladen vehicle.
9. When operating at Level 2, there is a minimum mass requirement for the drive axle group. The mass on the drive axle group must be at least 20% of the total combination mass e.g. at 56t total combination mass, $56 \times 0.2 = 11.2\text{t}$ is required on the drive axle group. This clause does not apply to an unladen vehicle.

Exemptions

Heavy Vehicle National Law Section 24

Heavy Vehicle (General) National Regulation Section 28


The following table lists exemptions from prescribed vehicle standards that have been granted for the vehicle(s) in this vehicle approval.

Exemptions	
ADR	NA
HV(MDL)NR	Schedule 6, Section 3 (Length – General)
HV(VS)NR	NA

ADR Australian Design Rules

HV(MDL)NR *Heavy Vehicle (Mass, Dimension and Loading) National Regulation*

HV(VS)NR *Heavy Vehicle (Vehicle Standards) National Regulation*

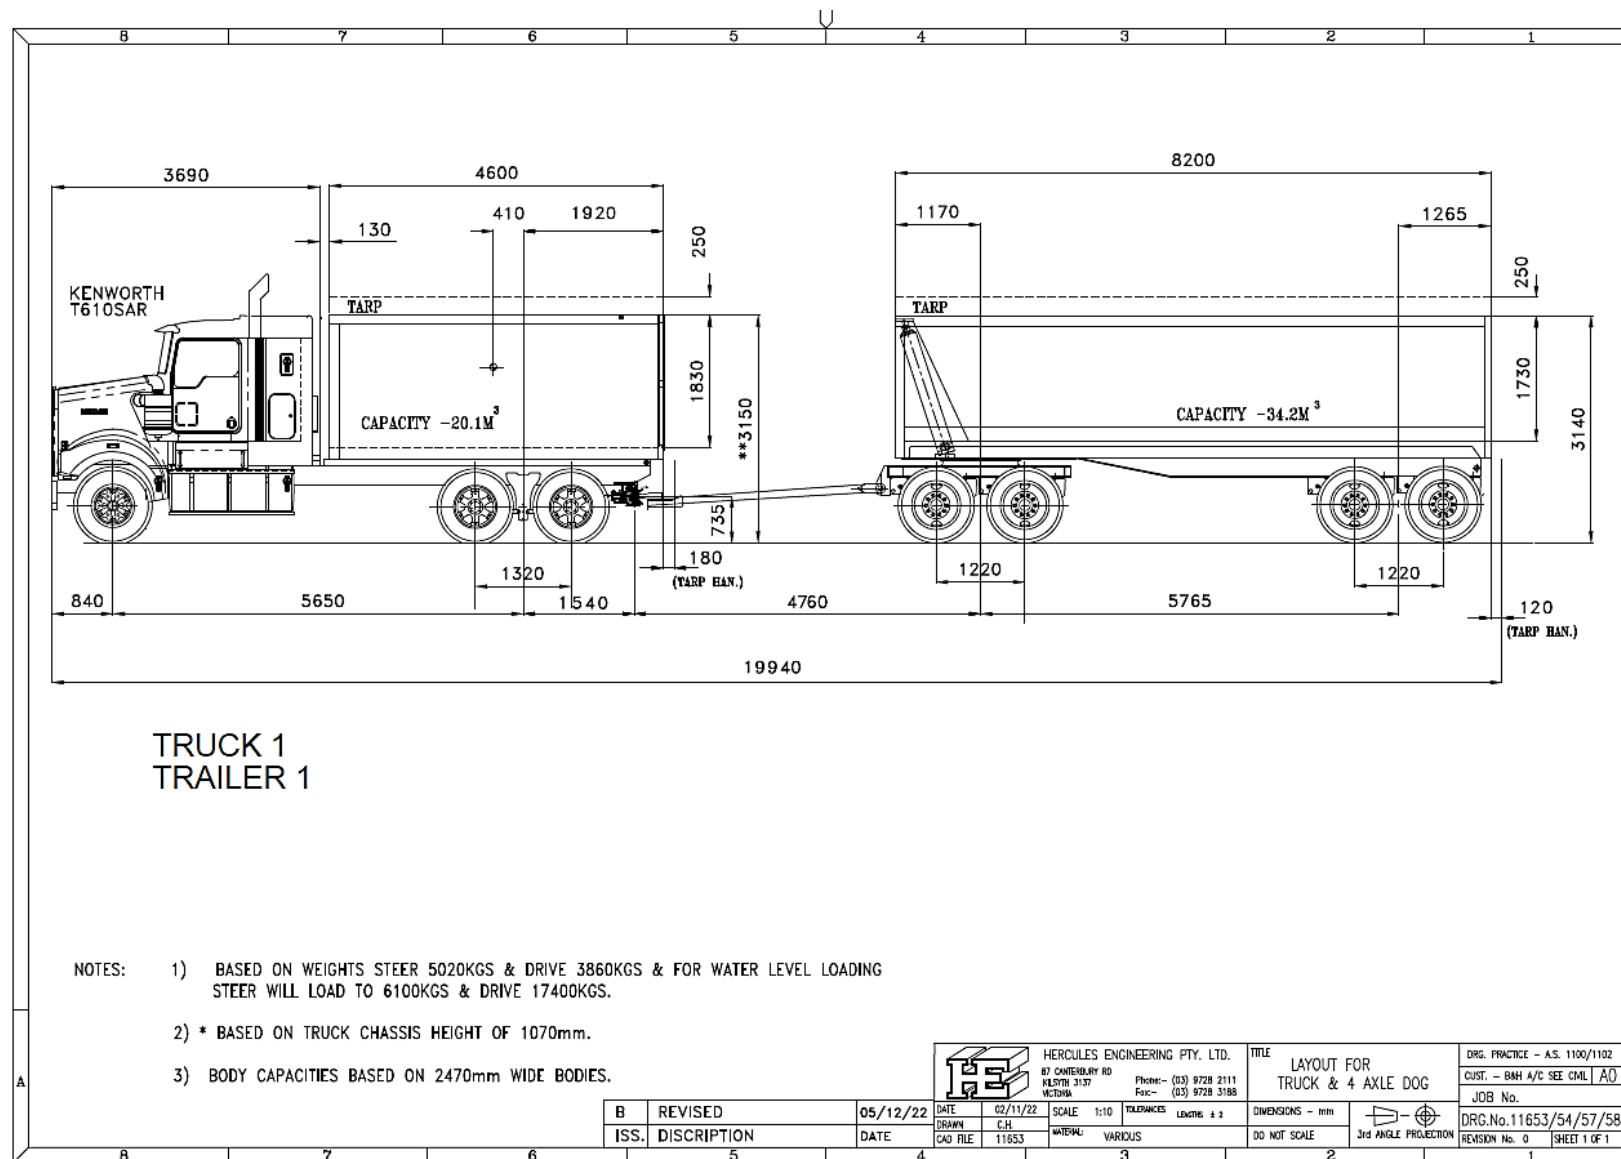

Approved tyre options – Tyre Set A

Steer –

6.5t axle mass limit

- **275/70R22.5** (Load Index **149** or higher, single configuration)
- **295/80R22.5** (Load Index **150** or higher, single configuration)
- **305/70R22.5** (Load Index **150** or higher, single configuration)
- **315/70R22.5** (Load Index **152** or higher, single configuration)
- **315/80R22.5** (Load Index **156** or higher, single configuration)
- **385/55R22.5** (Load Index **158** or higher, single configuration)
- **385/65R22.5** (Load Index **158** or higher, single configuration)

6.0t axle mass limit

- **275/70R22.5** (Load Index **146** or higher, single configuration)

Drive –

- **11R22.5** (Load Index **143** or higher, dual configuration)
- **275/70R22.5** (Load Index **145** or higher, dual configuration)
- **295/60R22.5** (Load Index **147** or higher, dual configuration)
- **295/80R22.5** (Load Index **148** or higher, dual configuration)

Trailer –

- **11R22.5** (Load Index **142** or higher, dual configuration)
- **275/70R22.5** (Load Index **141** or higher, dual configuration)
- **295/80R22.5** (Load Index **148** or higher, dual configuration)

Tyre load index and inflation pressure must be appropriate for the axle mass (inflation pressures must be within legal inflation limits).

Retread tyres are only permitted on the drive, dolly, and trailer axles.

Tyres listed herein are specific for PBS application number V220322.

A different list of tyres will apply for other combination types and different PBS application numbers.

Approved tyre options – Tyre Set B

Steer –

6.5t axle mass limit

- **275/70R22.5** (Load Index **149** or higher, single configuration)
- **295/80R22.5** (Load Index **150** or higher, single configuration)
- **305/70R22.5** (Load Index **150** or higher, single configuration)
- **315/70R22.5** (Load Index **152** or higher, single configuration)
- **315/80R22.5** (Load Index **156** or higher, single configuration)
- **385/55R22.5** (Load Index **158** or higher, single configuration)
- **385/65R22.5** (Load Index **158** or higher, single configuration)

6.0t axle mass limit

- **275/70R22.5** (Load Index **146** or higher, single configuration)

Drive –

- **11R22.5** (Load Index **142** or higher, dual configuration)
- **275/70R22.5** (Load Index **141** or higher, dual configuration)
- **295/80R22.5** (Load Index **148** or higher, dual configuration)
- **305/70R22.5** (Load Index **148** or higher, dual configuration)

Trailer –

- **11R22.5** (Load Index **142** or higher, dual configuration)
- **275/70R22.5** (Load Index **145** or higher, dual configuration)
- **295/80R22.5** (Load Index **148** or higher, dual configuration)

Tyre load index and inflation pressure must be appropriate for the axle mass (inflation pressures must be within legal inflation limits).

Retread tyres are only permitted on the drive, dolly, and trailer axles.

Tyres listed herein are specific for PBS application number V220322.

A different list of tyres will apply for other combination types and different PBS application numbers.

Approved tyre options – Tyre Set C

Steer –

6.5t axle mass limit

- **275/70R22.5** (Load Index **149** or higher, single configuration)
- **295/80R22.5** (Load Index **150** or higher, single configuration)
- **305/70R22.5** (Load Index **150** or higher, single configuration)
- **315/70R22.5** (Load Index **152** or higher, single configuration)
- **315/80R22.5** (Load Index **156** or higher, single configuration)
- **385/55R22.5** (Load Index **158** or higher, single configuration)
- **385/65R22.5** (Load Index **158** or higher, single configuration)

6.0t axle mass limit

- **275/70R22.5** (Load Index **146** or higher, single configuration)

Drive –

- **11R22.5** (Load Index **142** or higher, dual configuration)
- **275/70R22.5** (Load Index **141** or higher, dual configuration)
- **295/60R22.5** (Load Index **147** or higher, dual configuration)
- **295/80R22.5** (Load Index **148** or higher, dual configuration)
- **305/70R22.5** (Load Index **148** or higher, dual configuration)

Trailer –

- **11R22.5** (Load Index **142** or higher, dual configuration)
- **255/70R22.5** (Load Index **137** or higher, dual configuration)
- **265/70R19.5** (Load Index **141** or higher, dual configuration)
- **275/70R22.5** (Load Index **145** or higher, dual configuration)
- **295/80R22.5** (Load Index **148** or higher, dual configuration)

Tyre load index and inflation pressure must be appropriate for the axle mass (inflation pressures must be within legal inflation limits).


Retread tyres are only permitted on the drive, dolly, and trailer axles.

Tyres listed herein are specific for PBS application number V220322.

A different list of tyres will apply for other combination types and different PBS application numbers.

Declaration

I, Laszlo Bruzsa Chief Engineer, delegate of the National Heavy Vehicle Regulator, approve this PBS Vehicle Approval PBS–V220322 –VA15121.



Laszlo (Les) Bruzsa
Chief Engineer
National Heavy Vehicle Regulator
Dated: 09/11/23

Revision table

N	VA	Vers	Brief description	Date
1	15121	1A	Transfer from VA13928.	09/11/23

General access for a specified PBS vehicle

The vehicle combination(s) listed in this PBS Vehicle Approval qualify for general access to the road network under the *specified PBS vehicle* provisions of the Heavy Vehicle National Law. A specified PBS vehicle must comply with all applicable requirements of Schedule 1 of the *Heavy Vehicle (Mass, Dimension and Loading) National Regulation* (HV(MDL)NR).

Specified PBS vehicle mass limits

1. The maximum allowable mass of a specified PBS vehicle is the lesser of the maximum PBS Level 1 GML stated in this Vehicle Approval and the relevant mass limit prescribed in Part 1, section 2, Schedule 1 of the HV(MDL)NR.
2. The maximum allowable mass of an axle group on a specified PBS vehicle is the lesser of the maximum PBS Level 1 GML axle group mass limit stated in this Vehicle Approval and the axle group mass limit prescribed in “Table 1—Axle mass limits table” in Schedule 1 of the HV(MDL)NR.
3. The maximum allowable mass between any two axles or axle groups on a specified PBS vehicle is the relevant prescribed mass limit in “Table 2—Axle spacing mass limits general table” in Schedule 1 of the HV(MDL)NR.

Specified PBS vehicle operating conditions

1. When operating as a general access vehicle, a specified PBS vehicle must comply with all operating conditions of its Vehicle Approval that apply at Level 1. This includes payload heights, the drive axle mass requirement, approved tyre options and all operating conditions that do not specify a level of access.
2. The regulation includes a requirement about towing ratios. Loading and unloading must be managed so that the trailer mass does not exceed the mass of the towing vehicle.

For more information

For more information visit our [PBS vehicle access permit page](#) under Access management.

Disclaimer

The information on this page is general guidance only and does not constitute legal advice. Consider whether you require Independent legal advice to address your particular circumstances.

Important information

The driver must keep in the driver's possession a copy of this Vehicle Approval and be able to produce it for inspection by compliance officers. Penalties can apply.

If changes or modifications are required, these are limited to the specifications contained in the relevant PBS Design Approval and the Application for Design Approval Part A and B. Contact the applicant (see the cover page on this document) for information related to the allowed specifications.

A change of components and/or dimensions must be certified by an approved [PBS Certifier](#) and an updated version of this Vehicle Approval must be obtained. A change of tyres, outside of the list contained on this Vehicle Approval, also requires approval but will not require an inspection by a PBS Certifier.

If VA contains multiple tyre option tables, all tyre selections must be chosen from the same tyre options table. Tyres from different tyre options tables are not interchangeable.

Road access

The PBS Vehicle Approval is not an authorisation to access the road network. You must comply with the relevant Notice or obtain an access permit. To apply for an access permit, visit the [NHVR Portal](#).

For more information on PBS Notices visit:

[National Class 2 PBS Level 1 & 2a Truck and Dog Trailer Authorisation Notice 2021 \(No.1\)](#)

[National Class 2 Performance Based Standards \(High Productivity\) Authorisation Notice](#)

[National Class 2 Performance Based Standards \(Tier 1\) Authorisation Notice 2021](#)

If you add vehicles to your PBS Vehicle Approval, the PBS Vehicle Approval number may change depending on the new vehicles added. If the PBS Vehicle Approval number has changed, and your access permit references a PBS Vehicle Approval number, your access permit will need to be amended to reflect the latest Vehicle Approval number. Note that most truck and dog access permits will not reference a PBS Vehicle Approval number and therefore changes to the Vehicle Approval do not require an update to the access permit. For more information, watch [Adding vehicles to a PBS Vehicle Approval](#) video on our YouTube channel.

For more information, please visit our website at www.nhvr.gov.au or call 13 NHVR (13 64 87).

For queries relating to this document please contact the PBS Operations Team at pbs@nhvr.gov.au.

Manage your PBS Vehicle Approval

Please visit our [website](#) to view a list of available options and associated forms to manage your PBS Vehicle Approval.