


CHASSIS TIPPER

JOB NO: N206


REVISION NO: 0

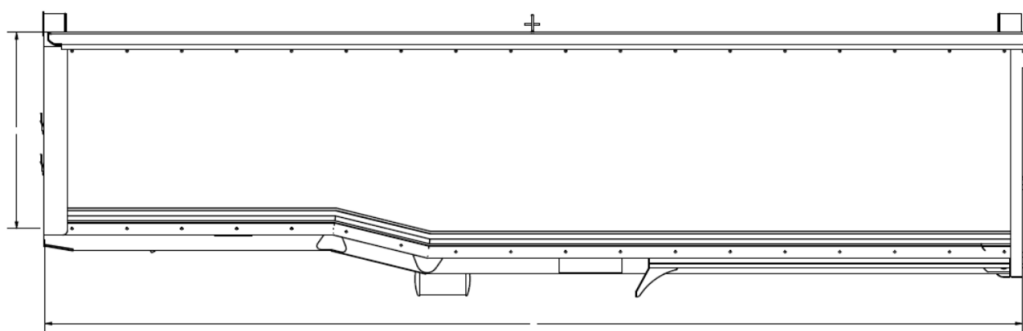


Height 2120 mm - 6' 11"

Length 10275 mm - 33' 9"

Tailgate Slope: 0°

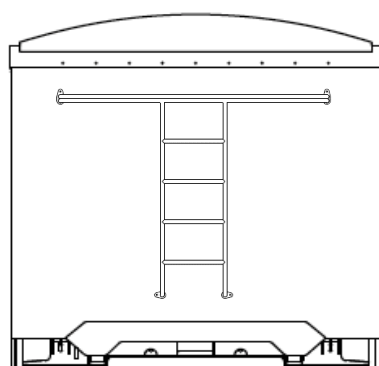

Pelmet
200 mm

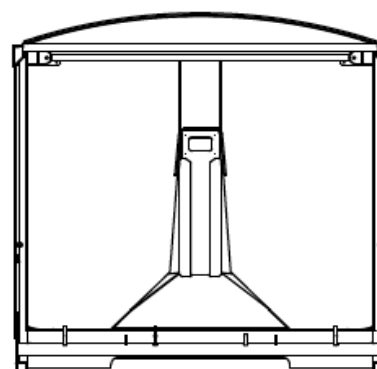

Standard Wide Body - 2450mm

	Thickness	Finish	Paint codes or vinyl specs if relevant
Floor Sheet	6 mm		
Front Sheet	5 mm	Mill bright polished plate	Mill Bright.
Side Sheet	5 mm	Painted	Ice White
Tailgate Sheet	5 mm	Painted	Ice White

Body Style: Standard Chassis Tipper Wide Body - Drop Deck

Paver Chute: No Paver Chute

Front Sheet Access Door: No access door fitted

Front Sheet Ladder: **Standard ladder in centre with double top rail**

Front Pelmet Grab Handle: Yes

Steps on Hoist Well: **Flat plate steps up the centre of hoist well**

Spreader Bar Type: **Centre pelmet type to suit flip over centre bar**

Angle for Top Lights: 0

Water Tank: **50ltr aluminium tank fitted**

Long Vehicle Signs: **3 way flip signs installed**

Dangerous Goods Signs: **Yes - Supplied and fitted**

Shovel Holder: Yes - supplied with shovel - fitted under floor drivers side


Broom Holder: Yes - supplied with broom - fitted under floor passenger side

Grain Chute Holder: Yes - supplied with chute - located passenger side beam

Grain Scraper Holder: Yes - supplied with grain scraper - fitted behind landing legs

TAILGATE & BACK BAR BUILD
JOB NO: N206
REVISION NO: 0

Hinge: Robuk FY 2 way - manual
Tailgate Access Door: No access door fitted
Tailgate Ladder: Rugs driver and passenger side full top rail
Pelmet Grab Handle: Yes
Grain Door: Standard grain door fitted
Grain Locks: 2 sets of S/S locks - manual
Finger Locks: 4 x S/S finger locks - air ram operated
Cut Out: Cut out needed for Ringfeder
Number Plate Position: Under passenger side lights on back bar
Tarp Handle Holders:

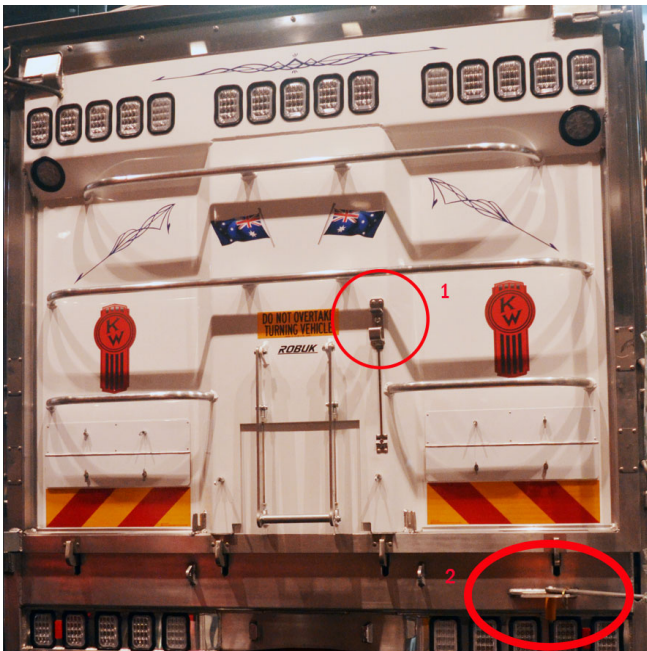

Postion 1: Yes - G style swivel Yes
 Postion 2: - fixed plate bracket

Position 3 as well.

and 100mm spacers to clear DG Signs

TARP SPEC

Tarp Type: Standard roll over
Front Drop: Standard pelmet to suit rollover tarp
Rear Drop: Standard pelmet to suit rollover tarp
Side Drop: Standard 300mm
Tarp Control: Manual rollover with SS fixed tarp handle
Tarp Support: Air flip over bar
Tarp Colour: Duggan - Blue & White.
Tarp Under Paver Chute: Nil Colour:

CT CHASSIS SPEC


JOB NO: N206

REVISION NO: 0

Drop In Pin Position: 600 mm

Fixed Pin Position: 1025 mm

Fixed Pin Position: 1450 mm

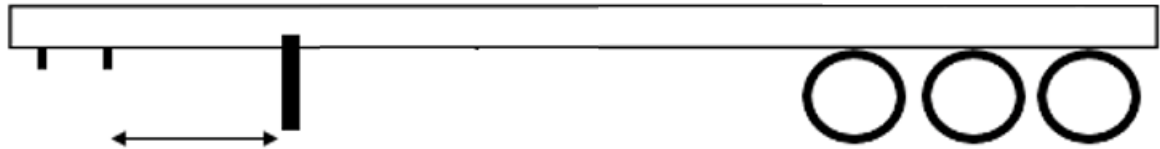

Leg Set Back: 2,575 mm

Axle Spread: 9'1" - 2,760mm

CHASSIS BUILD

PBS Spec: **Yes - QLD & NSW**

King Pin Size: 50mm

Body Lock: **Jost body lock fitted**

Ringfeder: Ringfeder fitted

Landing Leg: Jost Modul 400 with compensating feet

Anti Rattle Feet: No

Chassis Paint Colour: Kenworth Red

HYDRAULIC SPECS

Hoist: 50T Edbro - **Destroked** Part No. -

Diverter: Manual Diverter on chassis rail.




duggans trailer now has taps on chassis

CT CHASSIS SPEC

JOB NO: N207

REVISION NO: 0

COUPLINGS - FRONT OF CHASSIS

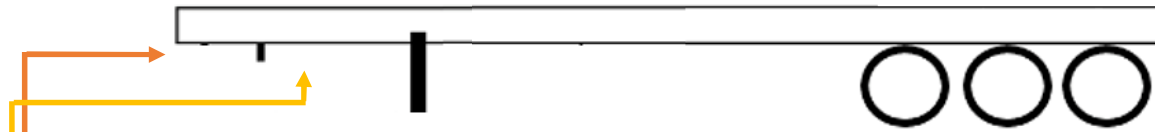Coupling Postion Front of Skid Plate

Hydraulic Supply: Female - Flat Face 1' - on bulk head

Hydraulic Return: **Male - Flat Face 1' - on bulk head**

Air: PBR - on bulk head

Electrical: Standard 7 pin - on bulk head

Trigger: NA

EBS: Yes - on bulk head

Hose Length: - mm

Couping Postion Rear of Skid Plate

Hydraulic Supply: Male - Flat Face 1' - on bulk head

Hydraulic Return: **Female - Flat Face 1' - on bulk head**

Air:

Electrical:

Trigger:

EBS:

Hose Length: - mm cut length



Imagine this pic
had a return line as
well.




CT CHASSIS SPEC

JOB NO: N206

REVISION NO: 0

COUPLINGS - REAR OF CHASSIS

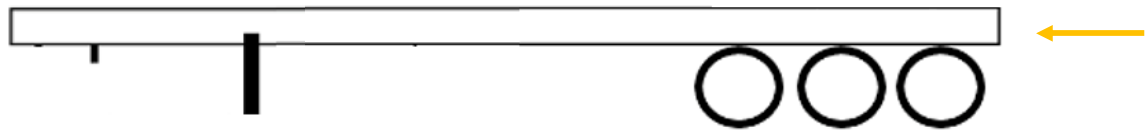

Tow Couplings

Hydraulic Supply: Female - Flat Face 1' - on bulk head

Hydraulic Return: **Male - Tema 1' - on bulk head**

Air: PBR - on bulk head

Electrical: Standard 7 pin - on bulk head

Trigger: NA

EBS: Yes - on bulk head

Hose Length: - mm cut length



CT RUNNING GEAR SPEC

JOB NO: N206 REVISION NO: 0

Axles & Suspension: Hendrickson air bag suspension - HXL7 drum brake axles
PCD: 285
Tyre Inflation: No
Axle Lift: No
Height Control: Standard raise/hold/lower control valve fitted in control box
Brake System: Knorr Bremse EBS
Ride Height: 13.5"
Wheels: Alcoa Superchrome outer with Alcoa polished inner
Tyres: Bridgestone R168 - 11R 22.5
Spare Wheel & Tyre: Yes - one spare wheel and tyre equipped
Guards: Splash guards
Colour:
Air Bag Taps: Located on chassis.

ELECTRICAL SPEC

Wiring: Standard Robuk Lucidity DG wiring.
Top Lights on Tailgate: 15
Light Style: Gromet style - rectangle
Light Colour: Clear
Side Lights: Lower curve only
Spacing 1200 mm **Total Per Side** 10
Work Light: Yes - 2 x round LED lights recessed into tailgate.
Weight Scales: E-Max digital - PBS Approved

ACCESSORIES SPEC

Auto Lube: Nil
Tool Box: 900 x 500 stainless steel lid with lock
Sign Writing: Yes - Customer to provide designs (price TBA)
Fire Extinguisher: Yes - 10kg powder fitted



new trailers now have 900MM toolbox