


Annual Inspection Certificate & Safety Standards Certificate

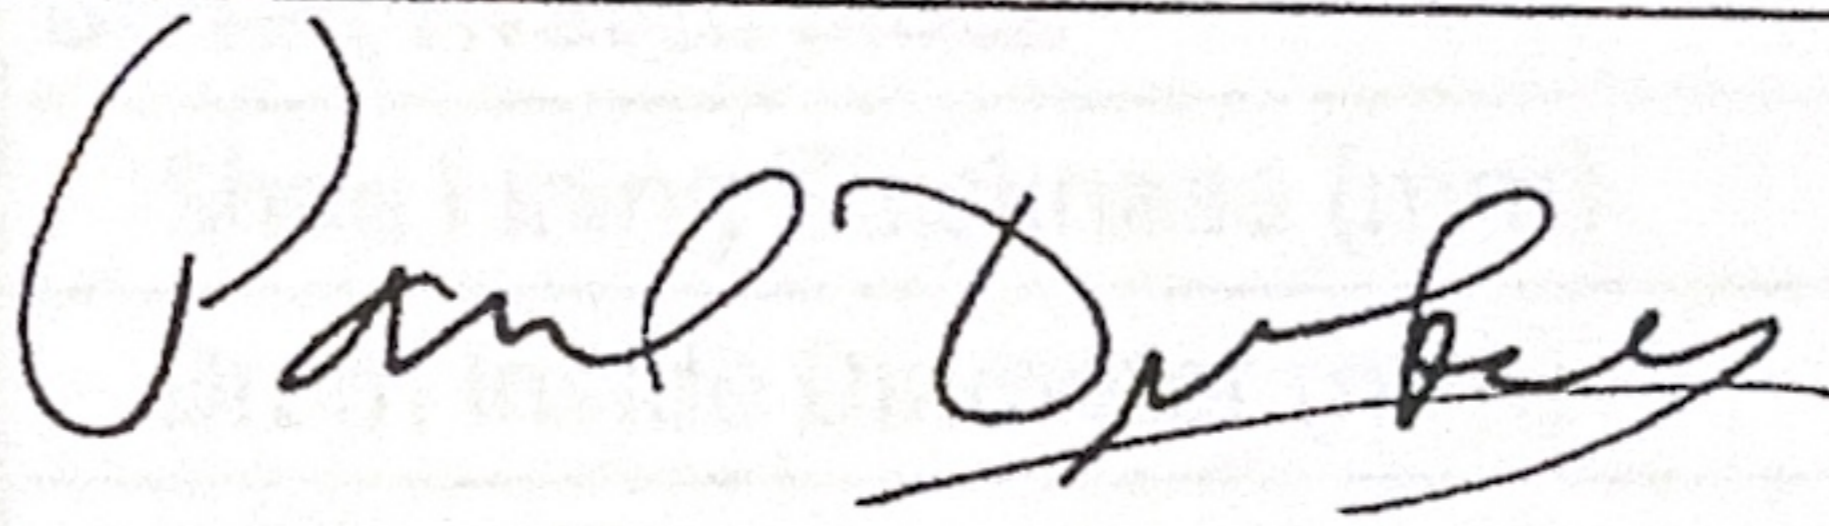

VEHICLE INFORMATION			
Plate#:	Y3842W	Year:	2012
VIN:	2M5941610C1129963	Make:	MANAC
GVWR (kg):	55799	Model:	MANAC TRAILER
Odometer ():		Type:	Trailer

CERTIFICATE INFORMATION	
Annual Inspection Certificate	Expires at the end of: Apr 2027
Safety Standards Certificate	Expires at the end of: June 3, 2026
Vehicle Inspection Certificate Number	LS20AD39
Inspection Start Date	Apr 28, 2026 System Time: 12 : 19
Inspection End Date	Apr 28, 2026 System Time: 13 : 32

VEHICLE INSPECTION CENTRE	
Vehicle Inspection Centre #: 13563	Technician: PAUL DUBAY
LMB TRANSPORT INC.	
O/A LMB TRANSPORT INC.	
209 PUTMAN INDUSTRIAL RD	
BELLEVILLE, ON K8N4Z6	Technician ID: 317301
613-968-7541	STO ID/Account: 13800214
	Trade Code: 310T, 310S

I certify that I inspected this vehicle on the inspection date in accordance with the inspection procedures established by directive under s. 100.7 of the Highway Traffic Act and that the vehicle meets the required equipment and performance standards as detailed in the Vehicle Inspection Report with the above referenced Vehicle Inspection Certificate Number.

This Certificate is not a warranty on the condition of the vehicle.

Vehicle Inspection Questions?
Call the Public Contact Centre 1-833-420-2103 or go to
<https://www.ontario.ca/page/driveon-emissions-and-safety-inspection-program>.

Vehicle Inspection Certificate Number: LS20AD39

Start Date / Time: Apr 28, 2026, 12:19 PM

End Date / Time: Apr 28, 2026, 1:32 PM

VEHICLE/ENGINE INFORMATION	CHASSIS
Plate#: Y3842W	Year: 2012
VIN: 2M5941610C1129963	Make: MANAC
GVWR(kg): 55799	Model: MANAC TRAILER
Odometer:	Fleet ID: 03

SAFETY INSPECTION RESULT	PASS
--------------------------	-------------

SAFETY SYSTEM INSPECTION RESULTS

All Safety System Components Passed Inspection
--

MANDATORY ITEMS

Inspection Item	Result	Inspection Item	Result
Axle 1, Driver Side Tire		Axle 1, Passenger Side Tire	
Tire Tread Depth (mm)	14	Tire Tread Depth (mm)	11
Initial Tire Pressure (kPa)	828	Initial Tire Pressure (kPa)	828
Drum Brakes Bolted/riveted block		Drum Brakes Bolted/riveted block	
Shoe Lining Thickness (mm)	6	Shoe Lining Thickness (mm)	8
Drum Inside Diameter (mm)	420.07	Drum Inside Diameter (mm)	419.67
Within OEM specifications?	Yes	Within OEM specifications?	Yes
S-Cam Drum Brakes		S-Cam Drum Brakes	
Chamber Type (size)	30	Chamber Type (size)	30
Brake Stroke (mm)	1	Brake Stroke (mm)	1

Inspection Item	Result	Inspection Item	Result
Axle 2, Driver Side, Inner Tire		Axle 2, Passenger Side, Inner Tire	
Tire Tread Depth (mm)	8	Tire Tread Depth (mm)	10
Initial Tire Pressure (kPa)	690	Initial Tire Pressure (kPa)	690
Axle 2, Driver Side, Outer Tire		Axle 2, Passenger Side, Outer Tire	
Tire Tread Depth (mm)	15	Tire Tread Depth (mm)	9
Initial Tire Pressure (kPa)	690	Initial Tire Pressure (kPa)	690
Drum Brakes Bolted/riveted block		Drum Brakes Bolted/riveted block	
Shoe Lining Thickness (mm)	7	Shoe Lining Thickness (mm)	6

Drum Inside Diameter (mm)	420.41
Within OEM specifications?	Yes
S-Cam Drum Brakes	
Chamber Type (size)	30
Brake Stroke (mm)	1

Drum Inside Diameter (mm)	420.00
Within OEM specifications?	Yes
S-Cam Drum Brakes	
Chamber Type (size)	30
Brake Stroke (mm)	1

Inspection Item	Result
Axle 3, Driver Side, Inner Tire	
Tire Tread Depth (mm)	15
Initial Tire Pressure (kPa)	690
Axle 3, Driver Side, Outer Tire	
Tire Tread Depth (mm)	9
Initial Tire Pressure (kPa)	690
Drum Brakes Bolted/riveted block	
Shoe Lining Thickness (mm)	9
Drum Inside Diameter (mm)	420.81
Within OEM specifications?	Yes
S-Cam Drum Brakes	
Chamber Type (size)	30
Brake Stroke (mm)	1

Inspection Item	Result
Axle 3, Passenger Side, Inner Tire	
Tire Tread Depth (mm)	14
Initial Tire Pressure (kPa)	690
Axle 3, Passenger Side, Outer Tire	
Tire Tread Depth (mm)	15
Initial Tire Pressure (kPa)	690
Drum Brakes Bolted/riveted block	
Shoe Lining Thickness (mm)	8
Drum Inside Diameter (mm)	419.24
Within OEM specifications?	Yes
S-Cam Drum Brakes	
Chamber Type (size)	30
Brake Stroke (mm)	1

Inspection Item	Result
Axle 4, Driver Side, Inner Tire	
Tire Tread Depth (mm)	9
Initial Tire Pressure (kPa)	690
Axle 4, Driver Side, Outer Tire	
Tire Tread Depth (mm)	9
Initial Tire Pressure (kPa)	690
Drum Brakes Bolted/riveted block	
Shoe Lining Thickness (mm)	13
Drum Inside Diameter (mm)	421.01
Within OEM specifications?	Yes
S-Cam Drum Brakes	
Chamber Type (size)	30
Brake Stroke (mm)	1

Inspection Item	Result
Axle 4, Passenger Side, Inner Tire	
Tire Tread Depth (mm)	10
Initial Tire Pressure (kPa)	690
Axle 4, Passenger Side, Outer Tire	
Tire Tread Depth (mm)	10
Initial Tire Pressure (kPa)	690
Drum Brakes Bolted/riveted block	
Shoe Lining Thickness (mm)	12
Drum Inside Diameter (mm)	419.66
Within OEM specifications?	Yes
S-Cam Drum Brakes	
Chamber Type (size)	30
Brake Stroke (mm)	1

Vehicle Inspection Centre #: 13563 LMB TRANSPORT INC. 209 PUTMAN INDUSTRIAL RD BELLEVILLE, ON K8N4Z6	Technician #: 317301 Name: PAUL DUBAY Report Number: 216 Tablet ID: 2923
---	---