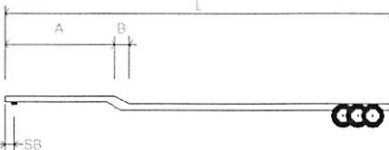




EH33-5

| | | | | | | | |
|--|---|--|---|---|--|--|--|
| 19-300 Trombone Tri-Axle Step Deck | S/n: 2M5131580611099991 | | License plate #: 831 HJL | | Exp. Date: Mar 13 | | |
| | Make: Manac | | Model: | | Color: Black Year: 2006 | | |
| | Load Rating: | | Suspension make: | | Type: Spring__ Air <u>X</u> Spring/ Air Combo__ | | |
| | Type of Rims: Dayton__ Bud <u>X</u> Steel <u>X</u> Aluminum__ | | | | | | |
| | Rim Bolt Style: Unimount <u>X</u> Inner-outer__ Dayton Lug nuts__ | | | | | | |
| | Weld on Winches: Yes <u>X</u> No__ | | | Outriggers: Yes__ No <u>X</u> | | | |
| | Empty weight __ lbs __ kgs LIVE ROLL <u>YES</u> | | | Tare weight of Tri-Axle grouping __ lbs __ kgs | | | |
| | Deck rise over fifth wheel 20" | | Lower Deck Length Open 700" 58'3" Close 476" 39'6" Total closed 53' Total open 71'6" | | Distance from upper fifth to center of tandem axle grouping 516" | | Distance from upper fifth to rear bumper 616" |
|  | | | Length, L 640" Kingpin setback, SB 21" Top of deck height(from ground) Neck 60" Bed 42" Distance A 168" B 0" Trailer Width 118" | | | | |
|  | | | <u>Tires</u> Single/Dual/ Quad (on each side of the axle) Tire Width 24 in Tire Rating 6390 lb Tire Size 22.5 | | <u>Axle</u> Axle Position, D 516in Axle Spread, S 114in Rating__ lbs Width 110in Max. Desired Load on Axle Group__ lbs | | |
| TYPE: Tri-Axle RUNNING GEAR WEIGHT: 2000 | | | | | | | |
| Front  Rear | | | CENTER OF GRAVITY INFO Bed/Floor height from ground 38in CG-Z (position from center line of vehicle) __ in CG-Y (center of gravity height from ground) __ in Deck heights 5'(neck) 3'2" (bed) | | | | |
| Completed by: | | | | Date: | | | |