

Y23-2
JUN


GreatWest Kenworth S001 S001

WESTMAX

, Canada
Phone:
Fax:
Email:

, British Columbia Canada
Phone:
Fax:
Contact Email:
Prepared for:

Horizontal Dimensions

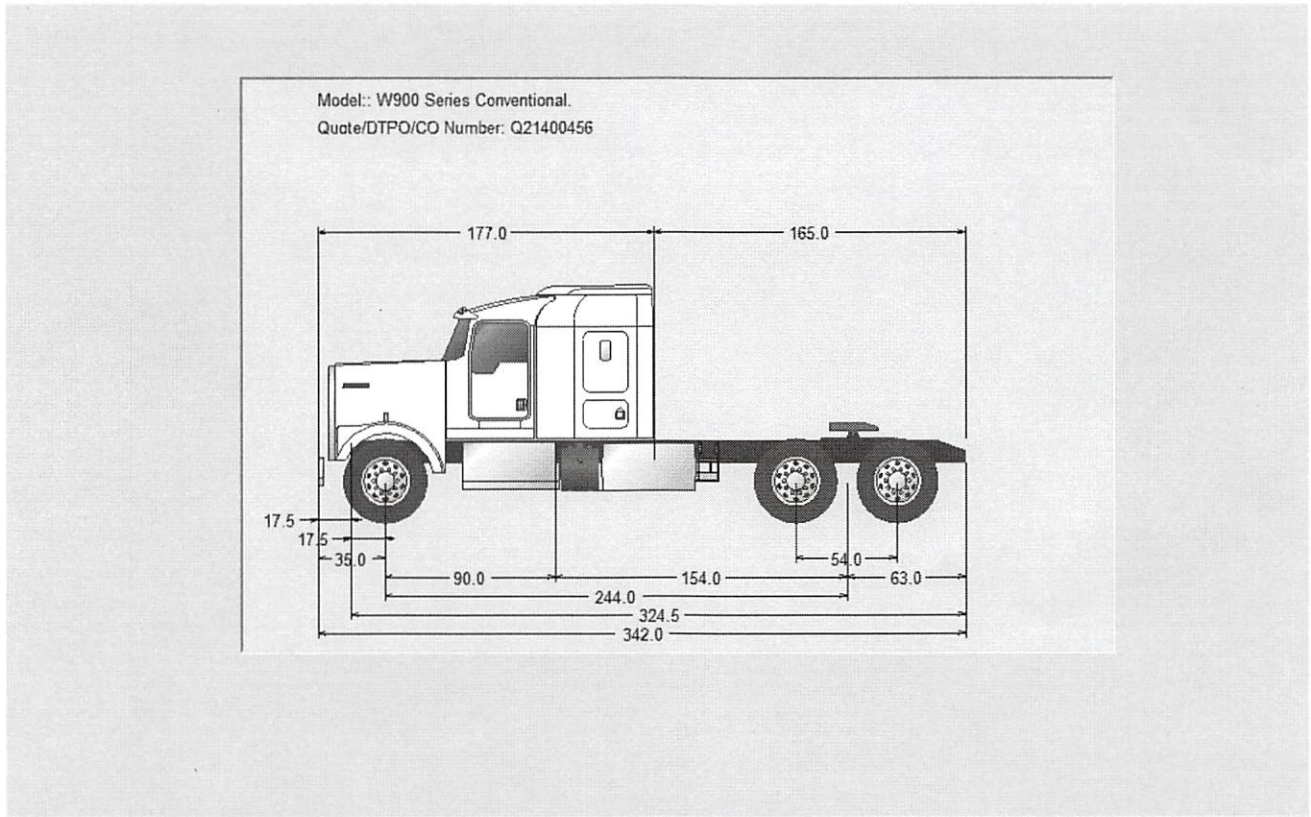

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	12/12/2016 1:15:48 PM	Incomplete	Model Number:	W900 Series Conventional.
Effective Date:	Jul 1, 2016		Quote/DTPO/CO:	Q21400456
Prepared by:	ID: GeorgeD		Version Number:	38.21



GreatWest Kenworth S001 S001

WESTMAX

, Canada
Phone:
Fax:
Email:

, British Columbia Canada
Phone:
Fax:
Contact Email:
Prepared for:

Vehicle Summary

	Unit		Chassis	
Model:	W900 Series Conventional.	Fr Axle Load (lbs):		13200
Type:	TRACTOR	Rr Axle Load (lbs)		46000
Description:	W900B 62	G.C.W. (lbs):		90000
	Application	Road Conditions:		
Intended Serv.:	Linehaul. Vehicles (trucks or tractors) used in	Class A (Highway)		85
Commodity:	Liquid petroleum products	Class B (Hwy/Mtn)		10
	Body	Class C (Off-Hwy)		05
Type:		Class D (Off-Road)		00
Length (ft):	0.0	Maximum Grade:		6
Height (ft):	0.0	Wheelbase (in):		244
Max Laden Weight (lbs):	0	Overhang (in):		63
	Trailer	Fr Axle to BOC (in):		90
No. of Trailer Axles:	3	Cab to Axle (in):		154
Type:	Doubles	Cab to EOF (in):		217
Length (ft):	40.0	Overall Comb. Length (in):		342
Height (ft):	14.0			
Kingpin Inset (in):	20	Special Req.		
Corner Radius (in):	4	Canadian Registry		
	Restrictions			
Length (ft):	120			
Width (in):	102			
Height (ft):	15.0			

Approved by: _____

Date: _____

Note: All sales are F.O.B. designated plant of manufacture.

PACCAR FINANCIAL	Ask your dealer for a quote today, or visit our website @ www.paccarfinancial.com .
	PACCAR Financial offers innovative finance and lease programs customized to meet your needs.

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	12/12/2016 1:16:00 PM	Incomplete	Model Number:	W900 Series Conventional.
Effective Date:	Jul 1, 2016		Quote/DTPO/CO:	Q21400456
Prepared by:	ID: GeorgeD		Version Number:	38.21



GreatWest Kenworth S001 S001

WESTMAX

, Canada

Phone:

Fax:

Email:

, British Columbia Canada

Phone:

Fax:

Contact Email:

Prepared for:

Data	Code	Description	\$ List	Weight
Model				
0000900	O	W900 Series Conventional. Threaded steel spring pins & bushings, 16mm. fasteners from rear cab support to end-of-frame, except tractor taper crossmember. Vinyl inside sunvisors, driver side includes strap & mirror, rider side includes strap; Under-dash center console w/ 2 cup holders, 2-12V outlets & a storage compartment, Glove box door with locking latch.	170,010	15,634
0070077	O	W900: Straight or Sloped Hood.	0	0
0080075	O	Dealer/Customer declines engine w/CARB Idle Emissions Reduction Feature.	0	0
0090006	O	62 in. AeroCab Sleeper w/rear axle capacity less than 59K.	0	0
0091070	O	Liquid petroleum products	0	0
0093000	O	Linehaul. Vehicles (trucks or tractors) used in over-the-road freight hauling. Pickup to delivery distance is typically over 300 miles, & annual mileage is typically over 60,000 miles per year. Operation is typically on-highway. Road usage: minimum 1% Class B, do not code for Class D.	0	0
0096010	O	Doubles	0	0
0098050	O	Canadian Registry	0	0

Engine & Equipment

0123755	U	X15 565 2017 565@2000 1850@1150	7,420	300
N09200	N205	120..Standard Maximum Speed Limit [LSL]		
N09220	N207	0....Expiration Distance		
N09240	P13	120..Hard Maximum Speed Limit		
N09260	P14	79...Maximum Accelerator Pedal Vehicle Speed		
N09280	P16	0....Accelerator Lower Droop		
N09300	P19	79...Maximum Cruise Speed		
N09320	P38	0....Cruise Control Lower Droop		
N09360	N203	474..Reserve Speed Function Reset Distance		
N09380	N202	0....Maximum Cycle Distance		
N09400	N206	10...Maximum Active Distance		
N09420	N201	0....Reserve Speed Limit Offset		
N09440	P11	YES..Engine Protection Shutdown		
N09460	P06	NO...Gear Down Protection		
N09480	P26	1400.Max PTO Speed		
N09500	P02	YES..Cruise Control Auto Resume		
N09520	P04	YES..Auto Engine Brake in Cruise		
N09540	N209	300..Expiration Distance		

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	12/12/2016 1:16:00 PM	Incomplete	Model Number:	W900 Series Conventional.
Effective Date:	Jul 1, 2016		Quote/DTPO/CO:	Q21400456
Prepared by:	ID: GeorgeD		Version Number:	38.21

Data	Code	Description	\$ List	Weight
		N09560 P520 Yes..Enable Idle Shutdown Park Brake Set		
		N09580 P32 5....Timer Setting		
		N09600 P233 Yes..Enable Impending Shutdown Warning		
		N09620 P234 60...Timer For Impending Shutdown Warning		
		N09640 P516 35...Engine Load Threshold		
		N09680 P33 No...Idle Shutdown Manual Override		
		N09720 P230 Yes..Enable Hot Ambient Automatic Override		
		N09740 P46 40...Low Ambient Temperature Threshold		
		N09760 P56 60...Intermediate Ambient Temperature Threshold		
		N09780 P47 80...High Ambient Temperature Threshold		
1000153	O	Prospector Version 38.2 Replaces version 38.1	0	0
1000744	O	Effective VSL Setting 65.0 MPH (CAN)	0	0
1000856	O	Enable Most Fuel Efficient EIST	0	0
1000857	O	Engine Idle Shutdown Timer Enabled	0	0
1000859	O	Enable EIST Ambient Temp Override	0	0
1000893	O	Eff EIST 300000 Expiration Miles (CAN) Use only with MX and Cummins engines	0	0
1002060	O	Air compressor: Cummins 18.7 CFM FOR Cummins AND PACCAR PX engines.	0	0
1042230	O	Air Cleaner: Dual 15 in. ERA stainless steel cowl mounted w/Kenworth bug w/Preferred Fit Element.	172	44
1099091	O	Fairings dual stainless steel for cowl mounted air cleaners.	192	2
1105220	O	Fan Hub: Horton 2-Speed for ISX15	351	0
1127950	S	Cooling module: W900B 1670 square inches. Includes aluminum radiator core, aluminum charge air cooler, translucent surge tank and washer bottle, silicone hoses, and extended life coolant. Drain valve is not available w/Allison transmissions.	0	0
1160105	O	Radiator winterfront.	110	2
1160208	O	Radiator bug screen mounted between hood & grille.	118	2
1247170	O	RH under cab SCR w/ dual side mounted tailpipes. For use w/ AeroCab sleepers only (modular sleepers use side of cab codes). T660 requires split fender hood.	939	101
1290448	O	Tailpipe: 7 in. dual 48 in. 45 degree curved.	474	17
1292329	O	Exhaust shield: dual w/Kenworth name cutout Full length perforated stainless steel. For side mounted exhaust AeroCab only.	338	0
1328140	O	PACCAR Fuel filter/water separator: 12V preheat, WIF sensor Cummins PX-9/ISX12/ISX15. 2013+	27	2
1504005	O	Immersion block heater 120V 1500W w/plug under door on C500, T660, T800 & W900.	108	2
1506055	O	Engine oil pan heater 120V 300W w/plug under door on C500, T660, T800 & W900.	145	2

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	12/12/2016 1:16:00 PM	Incomplete	Model Number:	W900 Series Conventional.
Effective Date:	Jul 1, 2016		Quote/DTPO/CO:	Q21400456
Prepared by:	ID: GeorgeD		Version Number:	38.21



Data	Code	Description	\$ List	Weight
1509029	O	Shutoff valves for trailer heat with hoses routed 3ft. BOC/BOS. Installation includes shutoff valves on a loop of hose routed to 3' BOC/BOS. Trailer heat application not to exceed 12 kW (680 BTU/min) of heat draw from the engine. For applications requiring a significant amount of heat (6-12 kW, Ex: heating a tanker), the engine must be warmed up before opening shutoff valves allowing coolant to flow. A separate coolant heater is recommended for applications requiring more heat.	236	0
1816200	O	Alternator: Bosch 200 amp, brush type	158	0
1821215	O	Batteries: 4 PACCAR GP31 threaded post (700) 2800 CCA dual purpose.	196	57
1836100	S	Starter: PACCAR 12 volt electrical system. W/ centralized power distribution incorporating plug-in style relays. Circuit protection for serviceability, 12-volt light system w/circuit protection circuits number & color coded.	0	0
1840006	O	Battery disconnect switches 2, mounted in cab Requires battery box LH under.	468	2
1900082	O	Multi-function engine connector for body builder interface for Cummins.	61	0
1900086	O	Connection between PTO switch & engine requires code 1900082 or 1900084. T680/T880: This feature is standard, no code required.	66	0
1900996	O	Jump start terminals under hood.	229	12

Transmission & Clutch

2058744	O	Transmission: Fuller RTLO18918B 18-speed w/oil cooler & pump. Standard with synthetic lubricant. Includes severe-duty pilot bearing on all class 8 models. *Torque Limit: 1850 pound-feet.	3,840	121
2250620	O	Clutch: Eaton 6 paddle ceramic 2050 lb-ft Eaton 15-1/2 in. Easy Pedal Advantage Manual adjusting clutch cover. Torque limiting clutch brake. Severe duty pilot bearing. Synthetic lubrication for Eaton Fuller transmissions & axles. Extended grease fitting.	415	10
2294035	O	Grease bank for clutch & cross shaft.	384	11
2406453	O	Driveline: 2 Dana SPL250XL 1 centerbearing requires 3500057 interaxle driveline. Low maintenance offering from Spicer. On-highway 350K mi first service interval, 100K mi subsequent service interval on U-joint, splines lubed for life for life, quick disconnect end caps.	1,041	95
2410047	O	High Capacity Input Shaft Bearing for High PTO Duty Cycle	26	0
2429100	O	Chassis will be fitted w/LH transmission PTO. (PREVENTS ECU F/INTERFERING W/PTO ONLY)	0	0
2429101	O	Chassis will be fitted w/RH transmission PTO. (PREVENTS ECU F/INTERFERING W/PTO ONLY)	0	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	12/12/2016 1:16:00 PM	Incomplete	Model Number:	W900 Series Conventional.
Effective Date:	Jul 1, 2016		Quote/DTPO/CO:	Q21400456
Prepared by:	ID: GeorgeD		Version Number:	38.21



Data	Code	Description	\$ List	Weight
2460042	O	14 in. Eaton Fuller high capacity oil to water cooler standard for transmission 1550-2250 lb-ft, 18-speed AutoShift.	0	0
2480315	O	Severe Service rear transmission support spring(s).	83	15

Front Axle & Equipment

2502323	O	Dana Spicer E-1322I Front Axle rated 13.2K 5in. drop.	485	28
2601605	O	Front Brakes: 13.2K Bendix RSD HP-ES S-Cam 16.5x5 in. drum brake.	-351	-62
2659047	O	Front dustshield: for drum brakes: all front axles.	78	6
2690002	O	Front Brake Drums: 14.6K 16.5x5 in. cast.	-189	78
2707050	O	Front Hub: 14,600 lbs. aluminum hub pilot 10-bolt, 11-1/4 in. bolt circle .	41	0
2741970	S	ConMet PreSet Plus Hub package; front axle.	0	0
2750001	S	Hubcap: front vented.	0	0
2765001	O	Front Auto Slack Adjuster.	0	0
2864012	O	Front Springs: Taperleaf 13.2K w/ shock absorbers w/ maintenance-free elastomer spring pin bushings. Standard with rubber pins. Not available on W900L.	39	9
2895121	S	Single power steering gear: 13.2K Sheppard M100P.	0	0
2900615	O	Threaded bushings for taperleaf springs 12K - 14.6K replacing rubber: T6/T8 & W9B only. W9L gets as standard: code not required. Not available with W9S.	50	0

Rear Axle & Equipment

3142161	O	Dual Meritor RT46-160P rear axle rated at 46K. Tandem rear axles.	3,068	481
3200391	O	Rear Axle Ratio - 3.91.	0	0
3304012	O	RR BRK:BENDIX RSD 16.5X7 DUAL 46K CAP REDUCED STOPPING DISTANCE TRACTOR ONLY. RSD-Compliant HP-ES S-Cam, tandem axle drum brake.	-8	24
3392005	S	Dual Rear Brake Drums: cast.	0	0
3407050	S	Dual Rear Hubs: Aluminum hub pilot 46K 11-1/4 in. bolt circle.	0	0
3441972	S	ConMet PreSet Plus Hub package; dual rear axle.	0	0
3465002	S	Dual Rear axle automatic slack adjusters.	0	0
3485207	O	Spring Brake: 3030 long stroke dual 30 square inches travel; replaces standard 2-1/2 in. travel. Helps keep brakes in adjustment longer.	29	4
3490047	O	Dustshields for drum brakes: all rear axles.	93	11
3495227	O	Bendix 6S/6M anti-lock brake system.	813	5

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	12/12/2016 1:16:00 PM	Incomplete	Model Number:	W900 Series Conventional.
Effective Date:	Jul 1, 2016		Quote/DTPO/CO:	Q21400456
Prepared by:	ID: GeorgeD		Version Number:	38.21



Data	Code	Description	\$ List	Weight
3500057	O	Interaxle driveline 1 Dana SPL170XL	0	-4
3511420	O	Driver Controlled Differential Lock (Crosslock) for Meritor Axles 40K to 52K forward rear & rear rear axle. Under Speed Interlock is standard on T680.	2,435	39
3573110	O	Separate flip valve for dual axles: differential lock or crosslock.	58	0
3744150	O	Rear suspension: Tandem Neway ADZ246 46K. 54 in. axle spacing. Air suspension w/ 10 in. ride height. Includes air suspension dump valve, single leveling valve & cast brake spiders.	5,583	110
3830510	O	Dual leveling valves for tandem air suspension.	171	2
3839002	O	Air suspension over-inflation valve w/warning light to temporarily raise the frame.	310	0

Tires & Wheels

4017157	O	Front tires: Michelin XZE2 11R24.5 14PR. 43.5 in. diameter, all position. 20.3 in. SLR.	330	26
4217157	O	Rear tires: Michelin XZE2 11R24.5 14PR. 43.5 in. diameter, all position. 20.3 in. SLR. Code is priced per pair of tires.	1,320	104
4900008	O	Rear Tire Quantity: 8	0	0
5045275	O	FR WHEEL: ALCOA 98U63 24.5X8.25 AL Ultra ONE Wheel.	376	-34
5245275	O	RR WHEEL: ALCOA 98U63 24.5X8.25 AL Ultra ONE Wheel.	1,504	-136
5859010	O	Single front axle: 2 wheels Dura-Bright Buffed. Dura-Bright outboard surface of aluminum wheels.	306	0
5859012	O	Dual rear axle wheels: 4 wheels Dura-Bright Buffed. Dura-Bright outboard surface of outer dual or single aluminum wheels.	801	0
5900008	O	Rear Wheel/Rim Quantity: 8	0	0

Frame & Equipment

6056400	O	Frame Rails: 10-3/4 x 3-1/2 x 3/8in. Steel 285in. to 336 in. Truck frame weight is 3.48 lb.-in. per pair of rails. Section modulus is 17.80, RBM is 2,132,000 in.-lbs per rail. Frame rail availability may be restricted based upon application, axle/suspension capacity, fifth wheel setting, or component/dimensional specifications. The results of the engineering review may result in a change to the requested frame rail. If a change is required Kenworth Application Engineering will advise the dealer of the appropriate material specification for a substitute rail.	204	194
6303428	O	Bumper: Straight steel box. Chrome. Requires bumper setting code.	360	211
6319035	O	35 in. Bumper setting. Requires a bumper code.	311	6
6324025	O	Front tow hook: Center mounted, cast. Requires iron front drive brackets.	237	28
6390001	S	Steel shackle links.	0	9
6390103	S	Front mudflaps.	0	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	12/12/2016 1:16:00 PM	Incomplete	Model Number:	W900 Series Conventional.
Effective Date:	Jul 1, 2016		Quote/DTPO/CO:	Q21400456
Prepared by:	ID: GeorgeD		Version Number:	38.21



Data	Code	Description	\$ List	Weight
6390312	O	Brackets: Iron front spring drive. Included with front spring capacity of 16,000 lbs or greater; code not required.	196	74
6391205	O	Custom Frame Layout: 5-9 chassis	200	0
6405086	O	W9 parallel polished aluminum battery box module w/ integral step. Extended length for use w/ 2010 SCR style exhaust. Up to 2 air tanks may mount to bottom of box. Batteries will be oriented perpendicular on rail.	1,353	9
6409901	O	Battery box location: LH Side.	0	0
6410010	O	Frame access grabhandle(s) LH mounted. Placement and quantity of grabhandles may vary due to FMCSR frame access requirements.	55	0
6410011	O	Frame access grabhandle(s) RH mounted. Placement and quantity of grabhandles may vary due to FMCSR frame access requirements.	55	0
6414003	O	Medium aluminum frame access deck plate, 36 in.	212	15
6417007	O	Frame access steps: 2 ladder-type, RH mount. Available when rear of tank extends less than 24 in. behind rear of cab, sleeper, or side extender.	163	15
6418006	O	Frame access steps: 2 ladder-type, LH mount. Available when rear of tank extends less than 24 in. behind rear of cab, sleeper, or side extender.	163	15
6451096	O	W900 polished DPF/SCR or CNG cover with step. For use w/ 2010 or later exhaust systems. For W900B/L, use extended length polished battery box on opposite rail to match the length of under cab components.	639	35
6543922	O	Fifth Wheel: ILS>40K air Hol FW31M924XL00 24 in. slide, 9 in. height. No lube. Outboard mounting angles, 55K vertical rating, LH release. Air slide control valve standard in dash. Accommodates a 2 in. SAE kingpin. Requires some style of trailer connections.	2,533	595
6679990	O	*** This vehicle does not have adequate swing/dip clearance when coupled to the trailer referenced on this order. See narrative line for maximum forward fifth wheel setting for this vehicle/trailer combination.*** N66790 MAX FWD 5TH WHL SETTING +8 INCH	0	0
6690060	O	FW rear/fixed setting behind bogie 6 in indicates rearmost setting measured rearward from centerline of tandem or single rear axle	0	0
6721144	O	Rear mudflap arms: Fleetline FF30SS, tapered spring loaded & stainless steel.	250	13
6722000	S	Rear mudflap shields: White plastic antisail w/ Kenworth logo.	0	0
6745270	O	Top Flange of Rear Frame bent & welded w/ crossmember. Non-towing end-of-frame configuration.	105	17

Fuel Tanks & Equip

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	12/12/2016 1:16:00 PM	Incomplete	Model Number:	W900 Series Conventional.
Effective Date:	Jul 1, 2016		Quote/DTPO/CO:	Q21400456
Prepared by:	ID: GeorgeD		Version Number:	38.21



Data	Code	Description	\$ List	Weight
7214135	O	Fuel Tank: 135 US gallon 24.5in. aluminum BOC replace. Class 8 fuel tanks w/ o locking caps include an anti-siphon device on the filler neck. A third tank support is required with this tank unless heavy-duty 7 in. wide supports are specified.	165	55
7216100	O	Fuel Tank: 100 US gallon 24.5in. aluminum BOC add. Class 8 fuel tanks w/ o locking caps include an anti-siphon device on the filler neck. Multiple tank installations include a fuel equalization system w/ dual draw and return lines with a splitter valve located within 6 inches behind the cab. Single draw and return is an option in some cases.	1,867	114
7722019	O	Medium round DEF tank. 20.7 gallons of useable volume. The DEF tank will be located on the side you specified. If you have specific configuration or body builder concerns, please utilize the Custom Frame Layout option. Standard capacity is calculated by fuel capacity of the vehicle and will accommodate two diesel fill-ups for every DEF fill-up. For 1:1 DEF fuel fill ratio, add 7889204.	210	32
7821300	O	Heavy-duty 7in. steel supports/straps for two 24.5in. tanks. Two supports per tank.	614	36
7840029	O	Polish only two aluminum tanks.	785	0
7840038	O	Polished cover for 1 DEF tank any size.	315	3
7889004	O	Position fuel fill beyond rear of sleeper. May have gap between under cab components and fuel tank(s) visible on chassis without full chassis fairings.	0	0
7889082	O	Polish only 7in. stainless steel straps for two 24.5in. tanks; 2 straps per tank.	294	0
7889203	O	Standard DEF to fuel fill ratio: 2:1 or greater.	0	0
7889245	S	Anti-siphon device swaged in place. For any number of fuel tanks.	0	0
7889604	O	DEF tank location is on the LH.	0	0
7930135	O	Location: 135 gal fuel tank RH behind cab	0	0
7940100	O	Location: 100 gal fuel tank LH behind cab	0	0

Cab & Equipment

8025300	O	Cab: AeroCab Curved Glass Conventional. AeroCab includes aluminum & fiberglass fully hucked cab w/ all aluminum bulkhead doors & continuous stainless steel piano-style door hinge & pins. Available only w/ AeroCab sleepers. Not for use on W900 w/ set forward axle. C500B: 123 in. BBC. 74 in. FA to BOC. T660B: 122 in. BBC. 74 in. FA to BOC. T800B: 121 in. BBC. 74 in. FA to BOC. W900B: 120 in. BBC. 90 in. FA to BOC. W900L: 130in. BBC. 100 in. FA to BOC. Incandescent exterior lights include diagnosable bulb detection and warning. Trailer cable on tractors includes integrity detection. Standard features include multiplex wiring for interior lights, automated pre-trip inspection, short and open check diagnostics, and programmable daytime running lights. Warning alarm will sound when lights are left on.	0	0
8057562	O	Sleeper: 62 in. AeroCab FlatTop sleeper.	14,815	745

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	12/12/2016 1:16:00 PM	Incomplete	Model Number:	W900 Series Conventional.
Effective Date:	Jul 1, 2016		Quote/DTPO/CO:	Q21400456
Prepared by:	ID: GeorgeD		Version Number:	38.21



Data	Code	Description	\$ List	Weight
8080137	O	Cab door bearing blocks, top & bottom.	30	0
8080942	O	Sleeper door, LH/RH w/ sliding window.	615	19
8090105	S	Hood: Straight Unitglas hood w/ grille & shell use for W900B requires 1200/1430 square in. radiator & export engine, or 1430 square in. radiator & 2007 engine, or 1670 square in. radiator & 2010+ engine.	0	0
8098206	O	Hood hinge reinforcement.	152	5
8098404	O	Additional 4 ribs on radiator grille.	115	2
8178210	O	Heater/Air Conditioner: Separate Units, Cab & Sleeper. W/integral Defrosters & A/C. Separate Heater & A/C In Sleeper. Includes 5 Mode Rotary Control In Dash. 45,000 BTU Cab Heater. Separate 29,000 BTU Sleeper Heater W/AC, Thermostatically Controlled. T660 Includes Filter Media. Includes On/Off Button For Sleeper Unit In Air Flow Control Dial. Parallel Plumbing Is Included W/ All Sleepers And Allows For Independent Control Of Heat Output At Each Heater. Shutoff Valves Are Optional.	0	0
8190146	O	Two ball valves for cab & sleeper heaters.	68	4
8190564	O	Air Conditioning Excise Tax: Canadian Registry	175	0
8201013	S	Steering wheel: 18 in. 4-spoke.	0	0
8201200	O	Adjustable telescoping tilt steering column.	425	10
8203088	O	All chassis on this order keyed alike. Only includes ignition & doors.	110	0
8203184	O	Switch & Wiring: For Customer-Installed Cab Panel Lights.	82	0
8205045	O	Flip Valve: On Dash For Single Speed PTO. Customer-Installed. Includes Indicator Light & Piping.	391	2
8205096	O	Information for customer-installed PTO Muncie non-838 8-bolt.	51	0
8221137	O	Gauge: Trailer air application gauge.	51	0
8221138	O	Gauge: Air suspension pressure gauge. For dual leveling valves, not dual read.	252	0
8224461	O	Digital Clock With Alarm: Mounted In Sleeper	51	1
8225658	O	Gauge: Axle oil temperature, dual-drive axle. (2 gauges) w/integral warning light.	237	0
8240620	O	Canadian instrument package: KPH speedometer replaces MPH.	0	0
8282004	S	KW Driver Information Center: Includes fuel economy, RPM display, trip information, truck information, diagnostics, gear display, alarm clock.	0	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	12/12/2016 1:16:00 PM	Incomplete	Model Number:	W900 Series Conventional.
Effective Date:	Jul 1, 2016		Quote/DTPO/CO:	Q21400456
Prepared by:	ID: GeorgeD		Version Number:	38.21



Data	Code	Description	\$ List	Weight
8282009	S	Instrument package: Includes speedometer, tachometer, fuel gauge, engine coolant temperature gauge, engine oil pressure, voltmeter. Class 8 also includes primary & secondary air reservoir gauges & an air application gauge. DEF level gauge and warning lamp are included with 2010+ engines. Engine hour meter and outside air temperature readouts are standard. Primary read out will be MPH. Add 8240620 to switch primary scale to KPH in Canada.	0	0
8330262	O	Interior: Diamond Cab 62 in. AeroCab Sleeper. Includes diamond tufted upholstered side and back panels with accent lines, stitched upholstered diamond tufted door and carpeted kick panel, full diamond tufted vinyl headliner, button color matches primary lining color, wood grain dash panels, black rubber floormat. Includes Kenworth NavPlus HD navigation system on 2010 and later engines. Sleeper includes sleeper curtain, full diamond tufted vinyl headliner, diamond tufted upholstered door pads and wall panels with accent lines, button color matches primary lining.	3,200	33
8343304	S	Interior color: Slate Gray w/trim Dark Slate Gray	0	0
8390748	O	Carpet replacing floormat: Black nylon in sleeper dressing area.	83	0
8410893	O	Driver seat: Kenworth Air cushion Premium Plus HB leather. Heated. Standard features includes 7 in. fore and aft slide adjustment w/isolator, 6-58 degree recline, air suspension w/ cover, dual armrests, and triple chamber air lumbar support. Cushion and back include air adjustment. Seat cushion is 20 inches wide w/ 2-position tilt and 6-position front cushion support. Seat material has a horizontal stitch pattern and is 2-tone in color. Standard storage includes a side bolster pocket and a hanging pocket. Seat back is carpeted, and high back seats include a storage pocket. Seat is manufactured by National. Includes inside visor and retractable 3-point matching seat belts. Grey seat belts.	911	0
8480190	O	Rider seat: Kenworth Toolbox Plus HB vinyl. Standard features include fixed base and backrest, tool box seat base w/ door, and dual armrests. Seat cushion is 19.5 inches. Seat material has a horizontal stitch pattern and is 2-tone in color. Seat back is carpeted with a map pocket. Seat is manufactured by National. Includes inside visor and retractable 3-point matching seat belts. Grey seat belts.	126	0
8490110	S	Seat color: Dark Slate Gray.	0	0
8498453	O	Dual KW driver seat armrests: Stowable inboard & folding outboard.	132	2
8505800	O	Switch, wiring & power outlet: 12V cooler w/ indicator light on dash. AeroCabs or 75 in. sleepers.	67	2
8520141	O	Premium pocket innerspring mattress on lower bunk.	0	0
8530237	O	Rubber floormat in tool compartment.	0	0
8555100	O	LH & RH upper forward storage compartments.	508	37
8570001	O	Full length closet w/shelf for 62 inch AeroCab only.	0	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	12/12/2016 1:16:00 PM	Incomplete	Model Number:	W900 Series Conventional.
Effective Date:	Jul 1, 2016		Quote/DTPO/CO:	Q21400456
Prepared by:	ID: GeorgeD		Version Number:	38.21



Data	Code	Description	\$ List	Weight
8570006	O	Two storage shelves: RH side for 62 inch AeroCab only.	0	0
8698998	O	Speakers: Two 5-1/4 in. For sleeper w/fader in radio for volume control to sleeper.	51	2
8699169	O	Additional accessory power supply wiring. In header.	17	0
8699514	O	Speakers: Four 4 in. x 6 in. high performance. Adds 2 speakers to the Panasonic standard 2. Located in cab header & rear cab corners.	102	0
8700023	O	Additional accessory plug in sleeper.	72	0
8700049	O	Logbook holder under dash.	41	0
8700168	S	Non-self cancelling turn signal: W/column-mounted headlight dimmer switch & intermittent wiper control.	0	0
8700186	S	Electric LH & RH door locks.	0	0
8700188	O	Remote Keyless Entry	403	0
8700405	O	Stainless steel permit panels on cab.	105	13
8700663	O	Kenworth TruckTech+ The Kenworth Remote Diagnostics system provides the Worlds Best reporting of engine and aftertreatment fault codes, as well as enhanced support for the truck owner through rapid communication of fault severity and recommended actions. This option is Standard on all Kenworths with an MX engine.	0	0
8800271	S	Long grabhandle RH side of cab.	0	0
8800373	S	Long grabhandle LH side of cab.	0	0
8800400	S	Grabhandle LH inside door frame above dash.	0	0
8800401	S	Grabhandle RH inside door frame above dash.	0	0
8829612	O	Side Extenders: 19 Inch Wide W/Rubber Edges. Rubber Edges Are 7 Inches Wide. Actual Dimension Are 19.25 Inches For Daycabs and 19.75 Inches For Sleepers.	526	52
8832115	O	DAYLITE DOOR: LH/RH INCL RH PEEPER WINDOW	0	0
8841623	O	Dual rectangular air horn 26 in. LH/RH top of roof. Includes air horn covers.	230	4
8850300	S	Look-Down, Pass. Door, Stainless 8.5x4.4	0	0
8863570	O	Dual convex heated mirror 8.5 inch w/ offset mounting below regular mirror.	84	11
8866102	O	Mirror: Dual Prutsmann Lighted Mirrors 7 in. x 16 in. Polished Stainless Steel, Thermostatically Controlled & Lighted. Switch Located On Door Pad.	27	0
8869005	S	Mirror brackets 8-1/2 ft load width.	0	0
8879213	O	Electric-powered LH & RH door window lifts. Switch located on door.	261	0
8890105	O	Two-Piece Roped-In Windshield, W/ Curved Glass.	153	2

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 12/12/2016 1:16:00 PM *Incomplete* Model Number: W900 Series Conventional.
Effective Date: Jul 1, 2016 Quote/DTPO/CO: Q21400456
Prepared by: ID: GeorgeD Version Number: 38.21



Data	Code	Description	\$ List	Weight
8890135	O	Exterior stainless steel sunvisor.	332	11
8890872	O	Kenworth cab/sleeper air suspension for use w/ 38/62/72/86 in. AeroCabs only.	0	0
8891000	O	Quiet Cab Package: For Non-VIT Interiors. Includes Firewall Insulation & Floor Covering w/ Sound Deadening Materials and Cowl Blanket	181	77

Lights & Instruments

9010802	S	Headlamps: Dual Rectangular, extended life halogen	0	0
9022137	O	Marker Lights: Five, rectangular, LED	184	0
9024102	O	Marker Lights: Five additional rectangular, LED, top of sleeper.	437	2
9030014	O	Turn Signal Lights: LED, mounted on fender	99	0
9030052	S	LED Stop, Turn, Tail: With Two LED Backup Lights and With An LED License Plate.	0	0
9049825	O	Customer-installed road/fog lights switch & wiring.	32	0
9056140	O	Dual Pedestal Floodlights: First set.	260	2
9058052	O	Switch & Wiring for Customer-installed Floodlight : w/o electrical pass-through - 2nd set. Wire coiled BOC/BOS.	104	0
9059909	O	Floodlight Location: Located high outboard of side extender - first set.	0	0
9080128	O	Dual Revolving Amber Roof Lights: Centered over cab door w/ stainless steel bracket.	715	15
9090000	O	Daytime Running Lamps.	180	0
9090037	O	Trailer Marker Lights w/ Separate Switch	37	0
9090039	S	Marker Lights: Interrupter Switch. Included in Turn Signal For All Models Except T3. The T3 Switch Is In The Dash.	0	0
9090065	O	LH & RH Courtesy Lamps: On upper skirt to light up steps.	138	0
9090126	O	Electric Backup Alarm: Meets SAE J994 & OSHA requirements.	161	4
9090302	O	Junction Box: Mounted Behind Cab or Sleeper Not Mounted at End of Frame.	147	1
9090845	O	Circuit Breakers: Replacing fuses. Does not apply to any 5-amp fuse box position. Breakers include stop/brake/turn, tail lamp, high & low beams, marker/clearance lamps, horn, fuel heat, gauges, air dryer, HVAC controls, panel lamps. Some circuits will remain fuses.	43	0

Air Equipment

9101230	O	Air Dryer: Bendix AD-IS Extended Purge heated.	175	4
---------	---	--	-----	---

Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	12/12/2016 1:16:00 PM	Incomplete	Model Number:	W900 Series Conventional.
Effective Date:	Jul 1, 2016		Quote/DTPO/CO:	Q21400456
Prepared by:	ID: GeorgeD		Version Number:	38.21



Data	Code	Description	\$ List	Weight
9108001	S	Moisture ejection valve w/ pull cable drain.	0	0
9110071	O	Tractor kit: Center frame-mounted w/ hosetenna. Includes composite gladhand/light plug holder. Kit includes dash mounted trailer air supply valve, trailer hand control valve, and hoses/fittings for the valves. Dash mounted parking brake valve and tractor protection valve are standard. Air lines are detachable at one end only, light lines are detachable at both ends. Conspicuity components are standard.	813	24
9120014	O	Air and light line length 14 feet	0	0
9140020	S	Nylon air tubing in frame & cab, excluding hoses subject to excessive heat or flexing.	0	0
9140201	O	Chrome hosetenna: Requires code for tractor kit w/ hosetenna.	14	0
9140287	O	Air tanks: clear of right side of transmission area. This code requires the use of a custom frame layout code.	0	0
9140328	O	Trailer ABS electric supply through SAE J560 7-pin connector per TMC RP137).	0	0
9140703	O	Optional Hosetenna Bracket Location 3ft BOC/sleeper. Hosetenna bracket will be located plus or minus six inches from any non-standard location requested	15	0
9150210	O	Straps for mounting air tank module under box. For steel air tanks only. Straps on all air tanks.	95	2

Extended Warranty

9200021	S	Standard Warranty.	0	0
---------	---	---------------------------	---	---

Miscellaneous

9409852	O	GHG Secondary Manufacturer: Does Not Apply	0	0
9490003	O	Additional lead time required for off highway & /or specialty component truck.	0	0
9490012	U	USA CERTIFICATION DECALS F/CANADIAN TRK	0	0
9490206	O	Warning triangle reflector kit: Shipped loose. Kit consists of 3 triangles in plastic carrying case. Not floor mounted.	46	4

Paint

9700000	O	Paint color number. N97020 A - L0225 WHITE N97200 FRAME N0001 BLACK	0	0
9943004	O	Bumper Unpainted	0	0
9943053	O	Sleeper Standard Paint	0	0
9943119	U	IMRON SOLID 1 COLOR CONV NS SPEC A WILL	0	0
9944821	O	1 - Color Paint - Sleeper Color will be White if no other color is specified.	0	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	12/12/2016 1:16:00 PM	Incomplete	Model Number:	W900 Series Conventional.
Effective Date:	Jul 1, 2016		Quote/DTPO/CO:	Q21400456
Prepared by:	ID: GeorgeD		Version Number:	38.21



Data	Code	Description	\$ List	Weight
9965510	S	Base coat/clear coat. The Kenworth Color Selector contains additional instructions, as well as information on Kenworth paint guidelines and surface finish applications. Kenworth is standard with Dupont Imron Elite paint.	0	0

Total Weight 19690 lb

Prices and Specifications Subject to Change Without Notice.

**Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.**

Printed:	12/12/2016 1:16:00 PM	Incomplete	Model Number:	W900 Series Conventional.
Effective Date:	Jul 1, 2016		Quote/DTPO/CO:	Q21400456
Prepared by:	ID: GeorgeD		Version Number:	38.21