


Doc's

SIO-2
SEP

BAYLINER
2000 Ciera Command Bridge

Capri
Ciera
Trophy
Rendezvous
Motoryacht

Boats
Locate Dealer
Subscribe
Request Brochure
Resources

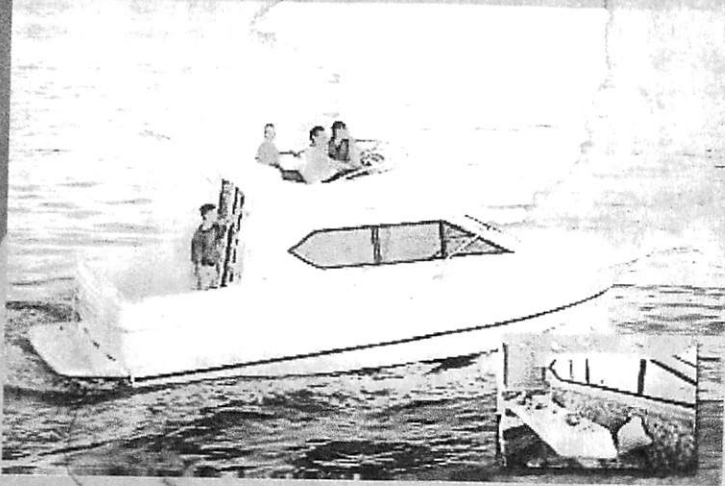


No other cruiser in its class offers this kind of versatility and value. The 2000 offers plenty of interior room for exceptional comfort with a hard helm below to extend your season.

No pilot car Required!!
@@

BAYLINER

2858 Ciera Command Bridge

[Capri](#)
[Ciera](#)
[Trophy](#)
[Rendezvous](#)
[Motoryacht](#)

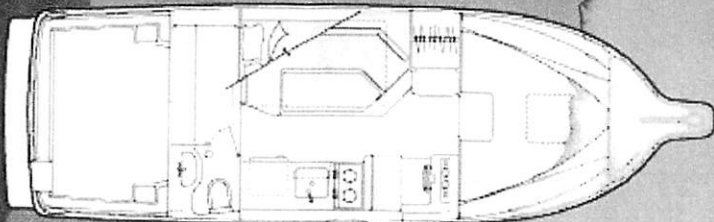

[Boats](#)
[Locate Dealer](#)
[Subscribe](#)
[Request Brochure](#)
[Resources](#)

Length overall (LOA): 30'6"/9.30m
 Beam: 9'10"/3.00m
 Deadrise: 18 degrees
 Length rigged: 32'8"/9.96m
 Weight: (w/base engine) 8223 lbs/3733kg
 Draft: 1'8"/.51m (drive up)
 Draft: 3'2"/.97m (drive down)

Bridge clearance max: 10'3"/3.13m

Holding tank capacity 26 gal/98L

Fuel capacity: 113 gal/427L

Water capacity 34 gal/128L

US GALLS = 21.5 imp GALLS

US GALLS = 94 imp. GALLS

US GALLS = 28 imp GALLS

HULL AND DECK

Gunwale trim: aluminum (anodized)
 Bow platform: integrated, with anchor roller
 Anchor line locker
 Cleats: mooring (7)
 Deck fitting: fuel fill
 Deck fitting: water fill
 Deck fitting: waste pump-out
 Hatch: anchor line locker
 Hatch: bow, translucent, opening
 Eyes: bow and transom, stainless steel
 Rails: bow, stainless steel, welded stanchions, through-bolted to deck
 Engine ventilation louvers
 Transom platform: bolt-on, with folding ladder
 Windows: side decks, opening sliders with screens

FLYBRIDGE

Beverage holder
 Seat: helm, bucket, adjustable, swivel, removable
 Seat: L-shaped lounge
 Dash panel: non-glare
 Engine controls: top-mount
 Trim and tilt switches
 Trim tab controls
 Ignition safety switch with lanyard
 Instrumentation, analog: speedometer, tachometer, voltmeter, oil pressure gauge, fuel gauge,

temperature gauge
Compass: Danforth®, 3", flush-mount, illuminated
Steering wheel: stainless steel
Venturi windscreen with aluminum frame
Radar arch

COCKPIT

Bulkhead: fiberglass with (1) fixed window and (1) opening slider with screen
Fiberglass cockpit liner, self-bailing
Carpet runners: snap-in
Courtesy lights
Steps: molded, access to side decks
Hatch: transom, gear and rod stowage
Hatch: engine access, gas assist spring
Hatches: (2) port and starboard, bilge access
Transom door
Ladder: access to flybridge, with stainless steel handrails
Door: cabin entry, locking

LOWER HELM

Beverage holder
Helm seat: bench, converts to countertop (galley)
Engine controls: top-mount
Trim and tilt switches
Trim tab controls
Instrumentation, analog: tachometer, voltmeter, oil pressure gauge, fuel gauge, temperature gauge
Steering wheel: stainless steel

CABIN

Window curtains
Lights: overhead and reading
V-berth: cushioned, padded headboard, stowage under
Shelves: hull sides
Dinette: converts to berth, stowage below
Hanging locker
Seat: jump, with removable cushion, stowage under
Stereo: AM/FM/CD player with (2) speakers
110v outlet, ground fault protected

MID BERTH

Privacy curtain
Lights: overhead and reading
Berth: cushioned
Seat: bench, with removable cushion
110v outlet, ground fault protected

GALLEY

Lights: overhead
Galley cabinet with sea rail
Drawers (4)
Built-in niche for optional microwave

Sink: stainless steel with pressure faucet (hot/cold)
Refrigerator: dual voltage, with freezer tray
Stove: Origo®, alcohol/electric, double burner with cover
110v outlet, ground fault protected

HEAD

Window curtain
Door: locking
Lights: overhead
Liner: molded fiberglass
Mirror
Sink: molded
Medicine cabinet
Shower
Toilet: marine, manual flush, holding tank
Toilet paper holder
110v outlet, ground fault protected

WINDSHIELD AND CANVAS

Windshield: lower helm, safety glass
Wiper, starboard
Command bridge cover
Windshield cover

HARDWARE AND EQUIPMENT*Plumbing*

Bilge pumps: (1) 1000 gph, (1) 500 gph, manual and automatic
Water heater: 6-gallon
Water system: pressure-demand, hot/cold
Seacock: bronze, on underwater through-hull fittings

Electrical

Horn, 12v
Lighting fixtures, 12v
Navigation lights, 12v
Battery switch
Battery charger/converter: Guest® 10-amp
Dockside inlet: 110v/30-amp, with 50-ft. cord
Distribution panel: 110v, with magnetic circuit breakers

Mechanical

Alarm: engine high temperature
Blower for forced air ventilation
Power trim and tilt
Steering: hydraulic
Trim tabs: Bennett®, electric/hydraulic

CONSTRUCTION FEATURES

5-year structural hull limited warranty, transferable
Carpeting: 100% polypropylene, solution dyed, stain

and fade resistant
Vinyls: expanded back, heavy-duty marine grade
Decks: non-skid
Electrical system: color coded
Fiberglass: hand-laid
Hull: vinylester skin coat
Insulation: thermal and acoustical
Unitized construction with glassed-in bulkheads
Sequential Lift Hull® design
Meets or exceeds all applicable U.S. Coast Guard
safety standards
NMMA certified

ENGINE OPTIONS**AVAILABILITY**

7.4 L MPI MerCruiser® Bravo III™ Sterndrive (310 hp)	Stocking.
4.2 L Diesel MerCruiser® Bravo II™ Sterndrive (200 hp)	Special order

OPTIONS

O-AB 110v Air Conditioning 12000 BTU (cool only)
O-BP Bottom Paint
O-GG Pre-wire (only) for windlass
O-HA Propeller delete
O-HM Macerator discharge
O-MI 110v/60hz Microwave oven
O-RW Radar wing
O-SJ Shipping cradle
O-WR Windshield wipers, port and center
O-ZJ "Advantage Pack", includes: 12v accessory
outlet, digital depth finder, VHF radio