Trailer Mounted Generator Set & Electric Crusher

Sales Package





Machine Details:

Machine Type	Make	Model	Year	Registration	Serial No	Engine Serial No
Impact Crusher	Westerfeld		1994		017764K	123453789
Generator Set (Mounted on Trailer)	Caterpillar	3412TA	1996			81Z19702
















KEEP CLEAR
WHILE IN
OPERATION
OVER
SIZE
DO NOT OVERTAKE
TURNING VEHICLE
ELKON


OVERSIZE
KEEP CLEAR WHILE IN OPERATION
9RJ 659
OVER
SIZE


OVERSIZE
KEEP CLEAR WHILE IN OPERATION
9RJ 659
SIZE



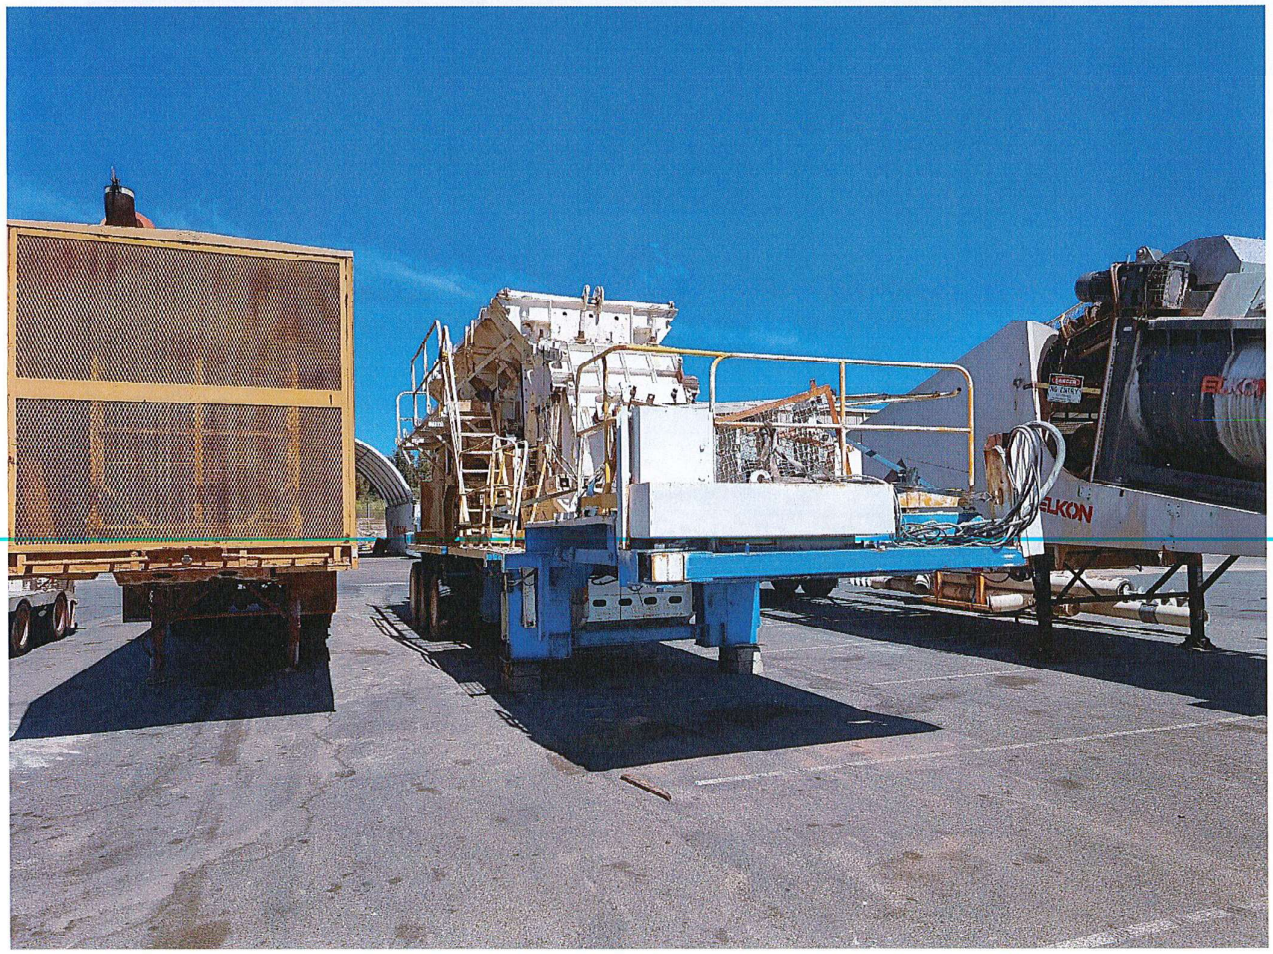
ELKON




OVERSIZE


ELKON
OVERSIZE
KEEP CLEAR
WHILE IN
OPERATION
9RJ 659
DO NOT
OVERTAKE
TURNING VEHICLE

GEN06 & CR06

Maintenance History (As of 7/04/2022)

Work Order Listing

(●) Standard
( ) Contractor

Print...	W/O No...	Asset No	Asset Description	Description	Requester	Raised	Department
☑	8184	GEN06 & CR06	Caterpillar 3412TA Genset & Westerfeld Crusher	Prepare for sale- clean crusher & genset of build up, remove WAL insignia, carry out minor repairs ...	Luke Birss	2/02/2022	
☐	1066	GEN06	Caterpillar 3412TA Genset	Continuous Open Work Order for GEN06 - All minor jobs will be put into this WO and all info will b ...		11/09/2019	
☐	1067	CR06	Westerfeld Crusher	Continuous Open Work Order for CR06 - All minor jobs will be put into this WO and all info will be ...		11/09/2019	

Work Order History Listing

W/O No	Asset No	Asset Description	Department	Description	Finished Date...	SMU Reading
6462	CR06	Westerfeld Crusher		Reseal Pos 2 main feeder vibe motor- has sustained water entry	15/07/2021	
6443	CR06	Westerfeld Crusher		Fabricate replacement handrails for top platform around feeder	12/07/2021	
6356	CR06	Westerfeld Crusher		Replace Feeder VSD- screen unreadable See docs for Marshalls VSD changeover invoice	5/07/2021	
6245	GEN06 & CR06	Caterpillar 3412TA Genset & Westerfeld ...		Genset & Crusher - 250 hr Service	28/06/2021	36826
5773	CR06	Westerfeld Crusher		Overhaul lower feeder vibe motors x2	19/05/2021	
4462	CR06	Westerfeld Crusher		Repair Tray loading ramp- top section has collapsed	1/02/2021	
4199	CR06	Westerfeld Crusher		Repair instantaneous trip fault- suspect VSD	17/12/2020	
3727	GEN06 & CR06	Caterpillar 3412TA Genset & Westerfeld ...		Genset & Crusher - 500 hr Service	12/10/2020	36567
3191	GEN06 & CR06	Caterpillar 3412TA Genset & Westerfeld ...		Genset & Crusher - 250 hr Service	15/07/2020	36312
2215	GEN06 & CR06	Caterpillar 3412TA Genset & Westerfeld ...		Repair damaged cabling between CR06 & GEN06, theft occurred 02.11.19	19/03/2020	36154
1067	CR06	Westerfeld Crusher		Continuous Open Work Order for CR06 - All minor jobs will be put into this WO and all info will be ...		
617	GEN06 & CR06	Caterpillar 3412TA Genset & Westerfeld ...		Receiver tank inspection	31/07/2019	
560	GEN06 & CR06	Caterpillar 3412TA Genset & Westerfeld ...		Install new batteries and reinstall trailer wheels	23/07/2019	36145
447	GEN06 & CR06	Caterpillar 3412TA Genset & Westerfeld ...		Remove 3 blown tyres and bring back to workshop	10/07/2019	
425	CR06	Westerfeld Crusher		Change roller,adjust belt,repair mount,fabricate spacer	8/07/2019	
407	CR06	Westerfeld Crusher		Replace grizzley belts,track main belt	27/06/2019	
167	CR06	Westerfeld Crusher		Impactor drive motor noisy-investigate, soft starter issues Electric motor removed , stripped down ...	11/07/2019	
127	CR06	Westerfeld Crusher		Shaker motor U/S, Impactor drive motor noisy - investigate, Soft start issues, Adjust soft start	12/06/2019	
✓ 120	CR06	Westerfeld Crusher		Set up crusher	17/05/2019	