

Equipment Maintenance Log

Equipment Description

2013 John Deere S670 Combine

Model

S670

Serial Number

1H0S670SHD0757297

Date	Machine Hours	Action Performed	Initials
June 30, 23	2826eng	change oil and filter	T.I.
"	"	change 2 Hyd. filters	T.I.
"	"	change fuel filters	T.I.
"	"	change cab recirc. filter	T.I.
"	"	replace tailings drive chain	T.I.
"	"	replace feeder chain	T.I.
"	"	replace feed accelerator drive belt	T.I.
9-19-23	3003	oil & filter change before winter storage	A.E.
~~July 30/24~~	~~3005~~	check level next year, could be too high	
July 30/24	3005	change engine air filters	T.I.
"	"	install swept back tail board kit	T.I.
"	"	change bulkhead carriage head bolts	T.I.
June 16/25	3191.3	change eng. air filters + inner cabin air	T.I.
"	"	change tailings elev. chain + drive chain	T.I.
"	"	change eng. oil & filter, fuel filters, hyd. filters	T.I.
"	"	change 1 feederhouse drive belt idler	T.I.
"	"	replace rotor drive sheaves, shaft, hub	T.I.
"	"	replace feederhouse drive chain	Toby
Jan 2026	3405	eng oil	Toby
"	"	eng air	

JL 3584

Equipment Maintenance Log

Equipment Description

2013 John Deere S670 Combine

Model

S670

Serial Number

1H0S670SHD0757297

[illegible]

REPLACEMENT PARTS GUIDE (-765000) S-SERIES COMBINES S660, S670, S680, S685, S690

S670

1H0S005H00757297

ENGINE

ENGINE AIR PRECLEANER PRIMARY FILTER

HXE11090 (S660 - S690)
AH222225 (S690) S.N (-745100)

Clean or Replace every 400 hours and as required.

AB

FRESH AIR FILTER

RE284091 **TA32591**
AH115833 STANDARD, (S690)
AH168783 HEAVY DUTY, (S690)

Clean or replace every 50 hours and as required.

RECIRCULATION AIR FILTER

L214634
H220870 (S690) S.N (-745100)

Clean or replace every 200 hours and as required.

HYDRAULIC / HYDROSTATIC

HYDRAULIC/MAIN ENGINE GEAR CASE FILTER

(OPEN CENTER)
AH128449 (S660, S670, S680, S690)
(FILTER IN RESERVOIR)

(CLOSED CENTER)
AXE12964 (S680, S690)
AL203061 (S690) S.N (-745100)

Filter change interval for all three filters is 400 hours.

HYDROSTATIC CHARGE FILTER (CLOSED CENTER)

AN207368 (S680, S690)
(OPEN CENTER W/ProDrive™)

AN207368 (S670)
(OPEN CENTER W/O ProDrive™)
AH128449 (S660, S670)

Replace every 400 hours.

ENGINE

MAIN ENGINE GEARCASE ProDrive™ FILTER

AH128449
Replace after first 100 hours, then every 400 hours.

ENGINE

MAIN ENGINE GEARCASE FILTER

CE19990
Change after every 400 hours or every year.

DIESEL PARTICULATE FILTER (DPF)

RE542183 (S660, S670)
RE541836 (S680, S685, S690)

Check every 4500 hours or diagnostic trouble code (DTC) is generated.

FUEL WATER SEPARATOR PRE-FILTER

R502778 STANDARD (S660 - S690)
N378886 PREMIUM (S690)
RE525523 (FINAL S660 - S690) TIER 2

RE539465 PRIMARY (S680 - S690) TIER 2

RE539465 PRIMARY (S660 - S690) IT4

DZ112918 SECONDARY (S660 - S690) IT

Replace fuel filters every 400 hours.

ENGINE AIR PRECLEANER SECONDARY FILTER


HXE11091 (S660 - S690)
AH212295 (S690) S.N (-745100)

Change secondary filter only with primary filter. Change or replace after 400 hours as required with primary air filter.

ENGINE OIL FILTER

RE509672 (S660, S670)
RE572785 (S680, S685, S690)

Minimum hours before first engine oil change is 100 hours. Extended engine oil change every 500 hours or annually, whichever come first. The extended 500 hour interval is only allowed if using Plus-50™ II oil with a John Deere filter and diesel fuel with sulfur content less than 15mg/kg (15ppm). If all conditions are not met, change oil and filter at 250 hours of operation.

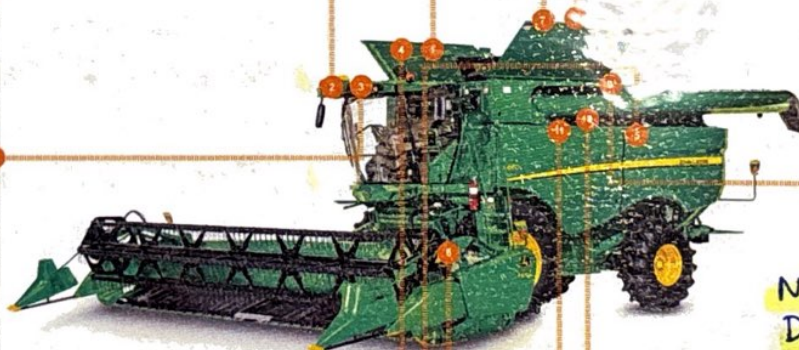

New Part #
DZ130550



JOHN DEERE